

# ARGESYS

ELEKTRONİK SANAYİ VE TİCARET A.Ş.

## ASYS LIGHT

"DOĞRU IŞIK HAYATA RENK KATAR"





HAKKIMIZDA  
ABOUT US 5



TARİHÇE  
HISTORY 7



SERTİFİKALAR  
CERTIFICATES 9



SHOWROOM 15

## DIŞ AYDINLATIMLAR



ALXSYS  
ALPHA 19



ALXSYS  
AREN 21



ALXSYS  
ARES LOTUS 23



ALXSYS  
BONNIE 25



ALXSYS  
CANOPPY-2 27



ALXSYS  
CLYDE 29



ALXSYS  
CLYDE-X 31



ALXSYS  
DAISY 33



ALXSYS  
DINO 35



ALXSYS  
EBRA 37



ALXSYS  
ELA 39



ALXSYS  
ERA 41

# ALSYS LIGHT



ALSYS EVA 43



ALSYS GAIA 45



ALSYS KEA 47



ALSYSKI NA 49



ALSYS LUKE 51



ALSYS MISRA 53



ALSYS MODI 55



ALSYS NANO 57



ALSYS PEGGY 59



ALSYS ROSE 61



ALSYS STREET 63



ALSYS TALI 101



ALSYS TERRA 65



ALSYS TONUZ 67



ALSYS YUSSI3 69



## İÇ AYDINLATMALAR



ALXSYS  
BORAK 71



ALXSYS  
COMET 71



ALXSYS  
DAMLA 73



ALXSYS  
DANILA 75



ALXSYS  
DOLI 77



ALXSYS  
EYMEN 79



ALXSYS  
GHINA 81



ALXSYS  
JASMIN 83



ALXSYS  
LENA 85




ALXSYS  
LINEER 87



ALXSYS  
LINSTRIP 89



ALXSYS  
LUNA 91

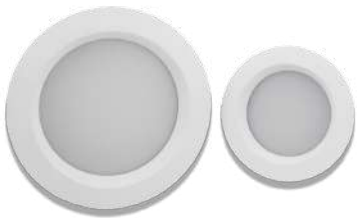

ALXSYS  
NAZ 93



ALXSYS  
REA 95



ALXSYS  
SIERRA 97



ALXSYS  
WILMA 103

# ASYS LIGHT



## DRIVER



ASYS 35W

105



ASYS 60W

107

## AKARYAKIT İSTASYONU



ALXSYS  
CANOPPY

27



ALXSYS STREET

63



ALXSYS TONOZ

67



SIGN CONTROL  
WIFI

109



SIGN V3 MID  
CONTROL  
WIFI

111



SIGN  
V3 GEN-2 MID  
CONTROL  
WIFI

113



SIGN UNIT  
FİYAT PANOSU

115



Firmamızın kurucusu ALEX SEYİS 1980-1991 yılları arasında Üçel Elektronik firması adı altında elektronik sektörüne giriş yapmıştır. 1991 yılında ortaklığını bitirerek Assan Elektronik firmasını kurmuştur.

Kurulduğu ilk yıllarda Türkiye ve yurtdışı için iyi bir üretici ve Ar-Ge firması olma yolunda ilerlemiştir. Yan sanayi üretim, özel tasarımlar ve televizyon yarışma programlarının elektronik ve aydınlatma tarafının vazgeçilmez ismi olan ALEX SEYİS teknolojinin ilerlemesi ile yenilikçi yaklaşımlara ve araştırmaya olan merakı ile 2003 yılında Türkiye’de bir ilki, Ledli Aydınlatma ürünlerini geliştirerek, reklam ve aydınlatma sektörlerinde kullanılmak üzere tasarlayıp üreterek sektörde öncü olmuştur.

Türkiye başta olmak üzere, Rusya, Almanya, İsviçre, Romanya, ABD, Cezayir, Tunus vb. birçok ülkeye tasarım ve üretim yaparak dünyaya kalitesini ve ismini duyurmaya başlamıştır.

Yıllar içinde yenilikçi ve araştırmacı yaklaşımının sonucu olarak yatırımlarını teknoloji ile paralel şekilde yürüterek üretim kapasitesini artırmıştır. 2014 yılında sektörden yatırımcı bir grup ile ortaklık yaptıktan sonra Nisan 2017 tarihinde hisselerinin tamamını devrederek ticari ilişkisini bitirmiştir.

Doğru ışık hayata renk verir ilkesi ile Mayıs 2017 tarihinde AR-GE öncelikli ve tabanlı olarak ARGESYS Elektronik A.Ş. firmamızı kurduk. Toplam 3000 m2 kapalı alanlı üretim ve Ar-Ge çalışmalarımızı yürüttüğümüz tesisimizde elektronik ve aydınlatma sektöründe kaliteden ödün vermeden tasarım ve üretimler yapmaya devam ediyoruz.

## DOĞRU IŞIK HAYATIMIZA RENK VERMEYE DEVAM EDİYOR.



The founder of our company, ALEX SEYIS, entered the electronics sector under the name of Üçel Elektronik company between 1980-1991. He ended his partnership in 1991 and established Assan Elektronik.

In the first years of its establishment, it has progressed to become a good manufacturer and R&D company for Turkey and abroad. ALEX SEYIS, which is the indispensable name of the electronics and lighting side of sub-industry production, special designs and television competition programs, with the advancement of technology and his interest in innovative approaches and research, a first in Turkey in 2003, by developing Led Lighting products, by designing and producing them for use in the advertising and lighting sectors. has been a pioneer in the industry.

Turkey, Russia, Germany, Switzerland, Romania, USA, Algeria, Tunisia etc. has started to announce its quality and name to the world by designing and producing in many countries.

Over the years, as a result of its innovative and researcher approach, it has increased its production capacity by carrying out its investments in parallel with technology. After partnering with a group of investors from the sector in 2014, it ended its commercial relationship by transferring all of its shares in April 2017.

With the principle that the right light gives color to life, in May 2017, ARGESYS Elektronik A.Ş. we established our company. We continue to design and produce without compromising quality in the electronics and lighting sector in our facility, where we carry out our production and R&D studies with a total closed area of 3000 m2.

## THE RIGHT LIGHT CONTINUES TO GIVE COLOR TO OUR LIVES.

Biz, ARG ESYS ailesi olarak” Doğru Işık Hayata Renk Verir!” ilkesine inanarak üretim yapmakta olan bir firmayız.1980-1999 yılları arası endüstriyel elektronik sistemleri üreten firmamız kazandığı endüstriyel üretim tecrübesiyle 2000 yılında tamamen LED aydınlatmaya odaklanarak, o günden bugüne LED aydınlatma ürünleri ve LED sürücülerini üreticisidir. 2017 yılında kurumsal markamızı değiştirerek, öncelikle AR-GE yapmak amacıyla kurduğumuz fabrikamızda SMD dizgi hattımız ve mekanik armatür üretim alanımız bulunmaktadır. Firmamızda toplamda 6 elektrik-elektronik mühendisi, 2 endüstri mühendisi ve 3 adet makine mühendisi ile toplamda 60 çalışmamız bulunmaktadır. Tüm ürünlerimizin elektronik LED kartları, güç kaynağı kartları, mekanik yapı ve parçaları kendi tasarımımızdır. Tüm ürünlerimizin kalıpları, marka tescil belgeleri ve patentleri bize aittir. İç ve dış mekân ürünleri üretmekteyiz. Ürünlerimizin %75’i IP67 korumalıdır. Bu da bize dış mekân ve peyzaj aydınlatmasında sorunsuz üretim, kullanım ve müşteri memnuniyeti sağlamaktadır. Güç kaynağı AR-GE süreçlerinde kendi bünyemizde EMI, SURGE, BURST testleri uygulanmaktadır. Testten geçen tüm güç kaynakları da IP67 koruma sağlandıktan sonra 24 saat BURN-IN testine tabi tutulup, satışa sunulmaktadır. Özel projelerde müşteri talebine göre DMX, DALI, 1-10V gibi kontrol sistemlerini de ürünlerimize uyarlayıp kullanabiliyoruz. Dünyada uluslararası çip krizi yaşanırken tasarımlarımızı geliştirip, tüketiciye yansıtmadan sorunları çözmeye odaklanabiliyoruz.

Standart ürünlerimiz ve güç kaynaklarımızın dışında müşteriye dayalı özel ürünler de tasarlayıp üretiyoruz. Türkiye’nin %85’ini kapsayan akaryakıt istasyonlarına fiyat panoları ve istasyon aydınlatma armatürleri de üretiyoruz. Türkiye dışında, Rusya, Türkmenistan, Kazakistan, Avusturya, İtalya, Almanya, İsviçre, Romanya, Cezayir, Tunus, Amerika, Kosova, Fas, Togo, Nijer, Nijerya, Gana, Brezilya, Mali, B.Faso, Angola, South Africa, Somali, Sierra Leone, Guinea, Liberia, Senegal, The Gambia, Guinea-Bissau, Cote d’Ivoire başta olmak üzere birçok dünya ülkesinde aydınlattığımız akaryakıt istasyonları bulunmaktadır. Ülkemizde akaryakıt istasyonları fiyat panolarında ilk LED denemesini yapmış olup, ilk LED panoları 1999’dan beri üreten firmayız. Senelerdir süre gelen akaryakıt istasyonu deneyimimizle sektörde öncü olmaktan onur duyuyoruz.

Teknik aydınlatmanın yanı sıra Türkiye’de ve dünyada aydınlattığımız birçok otel ve alışveriş merkezi bulunmaktadır. Proje bazlı çalışan bir firma olduğumuz için otel ve alışveriş merkezleri bizler için çok efektif çalışmalar olmaktadır.

ARGESYS olarak, ekibimizin 42 yıllık tecrübesi ile işimizi ustalıkla yapıyoruz. İSO 9001:14001:45001 sertifikaları ve yönetim politikalarıyla üretim ve denetim yapıyoruz. Dünyada yapılamaz denen birçok şeyi yapmış olmaktan gurur duyuyoruz.



We, as the ARGESYS family, a manufacturer company that believes in the principle of "The Right Light Gives Color to Life!". Our company, which has been producing industrial electronic systems dec 1980-1999, has been a manufacturer of LED lighting products and LED drivers since then. We are focusing entirely on LED lighting since 2000 with the industrial production experience that we gained. We have SMD typesetting line and mechanical luminaire production area in our factory, which we established in 2017 by changing our corporate brand, primarily for the purpose of R&D. There are 6 electrical and electronics engineers, 2 industrial engineers and 3 mechanical engineers in our company and 60 employees in total. Electronic LED cards, power supply cards, mechanical structure and parts of all our products are our own design. We own the molds, trademark registration certificates and patents of all our products. We produce indoor and outdoor products. 75% of our products are IP67 protected. This provides us with trouble-free production, use and customer satisfaction in outdoor and landscape lighting. EMI, SURGE, BURST tests are applied in power supply R&D processes within our own structure. All power supplies that have passed the test are also subjected to 24-hour BURN-IN testing after providing IP67 protection and are available for sale. We can also adapt and use control systems such as DMX, DALI, 1-10V to our products according to customer demand in special projects. While there is an international chip crisis in the world, we can improve our designs and focus on solving problems without reflecting them on the consumer.

Apart from our standard products and power supplies, we also design and produce special products based on the customer. We also produce price sign units and station lighting luminaires for fuel stations covering 85% of Turkey. Apart from Turkey, there are fuel stations that we have illuminated in many countries of the world, especially in Russia, Turkmenistan, Kazakhstan, Austria, Italy, Germany, Switzerland, Romania, Algeria, Tunisia, America, Kosovo, Morocco, Togo, Niger, Nigeria, Ghana, Brazil, Mali, B.Faso, Angola, South Africa, Somali, Sierra Leone, Guinea, Liberia, Senegal, The Gambia, Guinea-Bissau, Cote d'Ivoire.

We have made the first LED experiment on fuel stations price sign units in our country and we are the first company to produce LED panels since 1999. We are honored to be a pioneer in the industry with our fuel station experience that has been coming for many years.

In addition to technical lighting, there are many hotels and shopping centers in Turkey and around the world that we illuminate. Since we are a project-based company, hotels and shopping centers are very effective for us.

As ARGESYS, we do our job expertly with the 42 years of experience of our team. We carry out production and inspection with ISO 9001:14001:45001 certificates and management policies. We are proud to have done many things in the world that cannot be done.

# Sertifika



**ARGESYS ELEKTRONİK SAN. VE TİC. A.Ş.**

Şerifali Mah. Mevdudi Sk. No:48 Ümraniye / İSTANBUL

BELLA yukarıda adı geçen kuruluşun Kalite Yönetim Sisteminin aşağıdaki kapsamda uygunluğunu değerlendirmiş olup onaylamaktadır.

**ISO 9001:2015**

**KAPSAM**

**-Led Aydınlatma Armatürleri Tasarımı ve Üretimi**  
**-Elektronik Haberleşme Sistemleri için Ar-Ge Projeleri Tasarım ve Geliştirme Hizmetleri**

**EA KODU: 19 & 34**

Sertifika No : 20-229-1133  
Sertifika İlk Yayın Tarihi : 10.01.2020  
Yeniden Basım Tarihi : 21.12.2021/02  
Sertifika Bitiş Tarihi : 09.01.2023

*Bu belge 21.12.2021 –09.01.2023 tarihleri arasında geçerlidir.*



TÜRKAK BDS NO  
YS-BB22-2FB3



Kalite Yönetim Sistemi  
TS EN ISO/IEC 17021  
AB-0110-YS

Bu sertifika kuruluşun değerlendirme şartlarına uyması ve yılda en az bir kere yapılacak gözetim denetiminin başarılı geçmesi halinde 3 yıl boyunca geçerlidir. Bu sertifikanın mülkiyeti Bella Kalite Belgelendirme Hiz. Ltd. Şti.'ne aittir ve istenildiğinde iadesi zorunludur. Sertifikanın geçerlilik durumu Türkak Belge Doğrulama Sisteminden sertifikanız üzerinde bulunan QR kodunuzla kontrol edilebilir.  
Bella Kalite Belgelendirme Hiz. Ltd. Şti. Cevizli Mah. Zuhâl Cad. No:44 B Blok D:56 Ritim İstanbul Konutları Maltepe/İSTANBUL  
Tel: 0 216 518 33 08 Fax:0 216 518 40 74 www.bqcert.co.uk - info@bqcert.co.uk

FR.12/03.02.2021/04



# Sertifika

## ARGESYS ELEKTRONİK SAN. VE TİC. A.Ş.

Şerifali Mah. Mevdudi Sok No: 48 Ümraniye / İSTANBUL

BELLA yukarıda adı geçen kuruluşun İş Sağlığı ve Güvenliği Yönetim Sisteminin aşağıdaki kapsamda uygunluğunu değerlendirmiş olup onaylamaktadır.

### ISO 45001 : 2018

#### KAPSAM

- 1- LED AYDINLATMA ARMATÜRLERİNİN TASARIMI VE ÜRETİMİ
- 2- ELEKTRONİK HABERLEŞME SİSTEMLERİ İÇİN AR&GE PROJELERİ TASARLAMAK VE GELİŞTİRMEK



Sertifika No : 17-17010  
Sertifika İlk Yayın Tarihi : 26.10.2017  
Yeniden Basım Tarihi : 04.11.2020-03  
Sertifika Bitiş Tarihi : 04.11.2021  
Geçerlilik Periyodu : 1 YIL



Bu sertifika kuruluşun değerlendirme şartlarına uyması ve yılda en az bir kere yapılacak gözetim denetiminin başarılı geçmesi halinde 3 yıl boyunca geçerlidir. Bu sertifikanın mülkiyeti Bella Kalite Belgelendirme Hiz. Ltd. Şti.'ne aittir ve istenildiğinde iadesi zorunludur. Sertifikanın geçerlilik durumu [www.bqcert.co.uk](http://www.bqcert.co.uk) adresinden kontrol edilebilir.  
Bella Kalite Belgelendirme Hiz. Ltd. Şti. Cevizli Mah. Zuhâl Cad. No:44 B Blok D:56  
Ritim İstanbul Konutları Maltepe/İSTANBUL - Tel: 0 216 518 33 08 Fax:0 216 518 40 74 [www.bqcert.co.uk](http://www.bqcert.co.uk) - [info@bqcert.co.uk](mailto:info@bqcert.co.uk)

FR.12/05.02.2019/03



T.C.  
TÜRK PATENT ve MARKA KURUMU  
MARKA TESCİL BELGESİ

Marka No : 2017 65662 - Ticaret - Hizmet

**ARGESYS**  
ELEKTRONİK SANAYİ VE TİCARET A.Ş.

Marka Sahibi : ARGESYS ELEKTRONİK SANAYİ VE TİCARET A.Ş.  
TÜRKİYE CUMHURİYETİ  
Tatlısu Mh. Semt Haliç Sk. B 14/A Ümraniye/İstanbul Ümraniye İstanbul  
Emtiası : 09 , 11 , 35  
İlişiktir.



İşbu Marka 20/07/2017 tarihinden itibaren ON YIL süreyle  
03/01/2018 tarihinde tescil edilmiştir.

Prof. Dr. Habip ASAN  
Türk Patent ve Marka  
Kurumu Başkanı

**TÜRK  
PATENT**  
TÜRK PATENT VE MARKA KURUMU



T.C.  
TÜRK PATENT ve MARKA KURUMU  
MARKA TESCİL BELGESİ

Marka No : 2018 03609 - Ticaret - Hizmet

**ALXSYS**  
KEA

Marka Sahibi : ARGESYS ELEKTRONİK SANAYİ VE TİCARET A.Ş.  
TÜRKİYE CUMHURİYETİ  
Tatlısu Mh. Semt Haliç Sk. B 14/A Ümraniye Ümraniye İstanbul  
Emtiası : 11 , 35  
İlişiktir.



İşbu Marka 13/01/2018 tarihinden itibaren ON YIL süreyle  
25/02/2019 tarihinde tescil edilmiştir.

Prof. Dr. Habip ASAN  
Türk Patent ve Marka  
Kurumu Başkanı

**TÜRK  
PATENT**  
TÜRK PATENT VE MARKA KURUMU

  
T.C.  
TÜRK PATENT ve MARKA KURUMU  
**MARKA TESCİL BELGESİ**  
Marka No : 2018 03600 - Ticaret - Hizmet

**ALXSYS**  
AREN

Marka Sahibi : ARGESYS ELEKTRONİK SANAYİ VE TİCARET A.Ş.  
TÜRKİYE CUMHURİYETİ  
Tatlısu Mh. Semt Haliç Sk. B 14/A Ümraniye Ümraniye İstanbul  
Emtiası : 11 , 35  
İlişiktir.

  
İşbu Marka 13/01/2018 tarihinden itibaren ON YIL süreyle  
22/02/2019 tarihinde tescil edilmiştir.


  
Prof. Dr. Habip ASAN  
Türk Patent ve Marka  
Kurumu Başkanı

**TURK PATENT**  
TÜRK PATENT VE MARKA KURUMU

  
T.C.  
TÜRK PATENT ve MARKA KURUMU  
**MARKA TESCİL BELGESİ**  
Marka No : 2018 03614 - Ticaret - Hizmet


**ALXSYS**  
MISRA

Marka Sahibi : ARGESYS ELEKTRONİK SANAYİ VE TİCARET A.Ş.  
TÜRKİYE CUMHURİYETİ  
Tatlısu Mh. Semt Haliç Sk. B 14/A Ümraniye Ümraniye İstanbul  
Emtiası : 11 , 35  
İlişiktir.

  
İşbu Marka 13/01/2018 tarihinden itibaren ON YIL süreyle  
21/06/2018 tarihinde tescil edilmiştir.


  
Prof. Dr. Habip ASAN  
Türk Patent ve Marka  
Kurumu Başkanı

**TURK PATENT**  
TÜRK PATENT VE MARKA KURUMU

  
T.C.  
TÜRK PATENT ve MARKA KURUMU  
**MARKA TESCİL BELGESİ**  
Marka No : 2018 59170 - Ticaret - Hizmet

ALX POWERSYS

Marka Sahibi : ARGESYS ELEKTRONİK SANAYİ VE TİCARET A.Ş.  
TÜRKİYE CUMHURİYETİ  
Tatlısu Mh. Semt Haliç Sk. B 14/A Ümraniye Ümraniye İstanbul  
Emtiası : 09 , 11 , 35  
İlişiktir.

  
İşbu Marka 21/06/2018 tarihinden itibaren ON YIL süreyle  
25/12/2018 tarihinde tescil edilmiştir.

  
Prof. Dr. Habip ASAN  
Türk Patent ve Marka  
Kurumu Başkanı

**TURK PATENT**  
TÜRK PATENT VE MARKA KURUMU



## FAYDALI MODEL BELGESİ

No: TR 2018 07678 Y

Buluş Başlığı

**FARKLI BİR YAPILANMAYA SAHİP LED GÖVDESİ**

Faydalı Model Sahibi

**ARGESYS ELEKTRONİK SANAYİ VE TİCARET A.Ş.**

Bu belge, 6769 sayılı Sınai Mülkiyet Kanunu kapsamında 30/05/2018 tarihinden itibaren 10 yıl süre ile korunmak üzere 22/03/2021 tarihinde verilmiştir.

Prof. Dr. Habip ASAN  
Başkan



## FAYDALI MODEL BELGESİ

No: TR 2018 07688 Y

Buluş Başlığı

**İŞLEVSEL BİR YAPIYA SAHİP LED AYDINLATMA**

Faydalı Model Sahibi

**ARGESYS ELEKTRONİK SANAYİ VE TİCARET A.Ş.**

Bu belge, 6769 sayılı Sınai Mülkiyet Kanunu kapsamında 30/05/2018 tarihinden itibaren 10 yıl süre ile korunmak üzere 21/08/2020 tarihinde verilmiştir.

Prof. Dr. Habip ASAN  
Başkan

# IstanbulLight

## Katılım Sertifikası

### ARGESYS ELEK SAN TİC. A.Ş.

IstanbulLight 12. Uluslararası Aydınlatma ve Elektrik Malzemeleri Fuarı ve Kongresi'ni katılımınızla onurlandırdığınız için teşekkür ederiz.

**18-21 Eylül 2019**



## Certificate

SWISS CERT Pvt. Ltd. hereby certify that the Quality Management System of  
**ARGESYS ELEKTRONİK SAN. VE TİC. A.Ş**  
TATLISU MAH. HALIÇ SOK. B 14 A ÜMRANIYE - İSTANBUL/  
TÜRKİYE

has been assessed and found to be in accordance with the requirements of  
**Quality Management System ISO 9001:2015**

and scope of activities are detailed below

1- DESIGN AND PRODUCTION OF LIGHT EMITTING DIODE (LED)  
2- DESIGN AND DEVELOP R&D PROJECT FOR ELECTRONIC  
COMMUNICATION SYSTEMS

1- LED AYDINLATMA ARMATÜRLERİNİN TASARIMI VE ÜRETİMİ,  
2- ELEKTRONİK HABERLEŞME SİSTEMLERİ İÇİN AR&GE  
PROJELERİ TASARLAMAK VE GELİŞTİRMEK

This Certificate is valid for a period of Three years from: 12.10.2017 until: 11.10.2020  
And remains valid Subject to satisfactory completion of surveillance audits.

Certificate Number: 211010  
Rev No: 00



  
Director

SWISS CERT PVT. LTD.  
402, BEST SITY TOWER, 116TH ST, SINGAPORE. P. 116004, SINGAPORE  
This certificate is the property of SWISS CERT PRIVATE LIMITED and shall be returned upon request.  
All Interested parties are advised to verify the validity of the certificate from SWISSCERT ([info@swissindia.com](mailto:info@swissindia.com))



**ARGESYS** asys LIGHT  
ELEKTRONİK SANAYİ VE TİCARET A.Ş.





# ARGESYS asys LIGHT

ELEKTRONİK SANAYİ VE TİCARET A.Ş.



**ARGESYS** asys LIGHT  
ELEKTRONİK SANAYİ VE TİCARET A.Ş.



# ARGESYS asys LIGHT

ELEKTRONİK SANAYİ VE TİCARET A.Ş.

[www.argesys.store](http://www.argesys.store)  
[info@argesys.com.tr](mailto:info@argesys.com.tr)

SAYFA 18

## ALXSYS ALPHA



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING




DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)




# ASYS LIGHT

## ALXSYS ALPHA DATASHEET

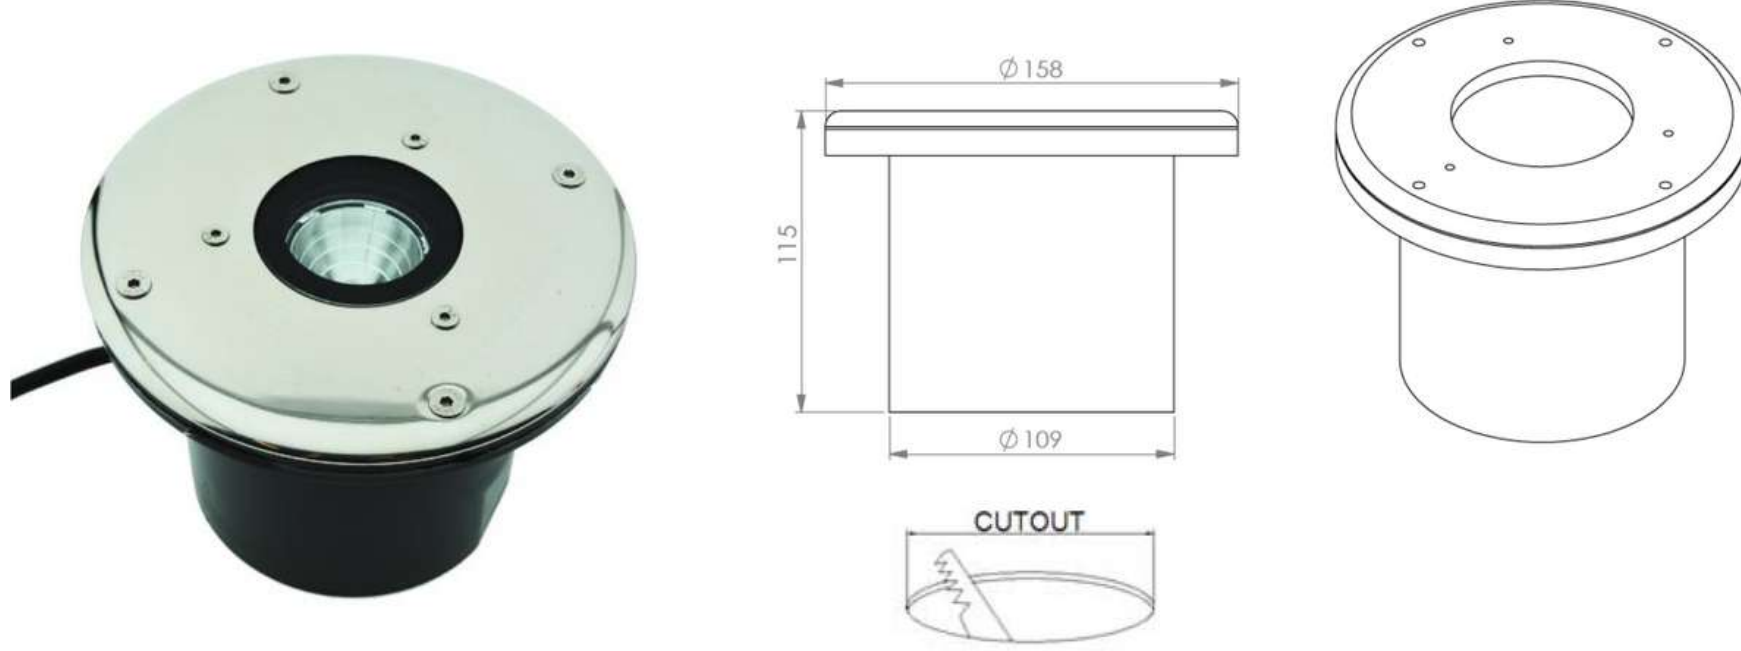

<b>MODEL /SIZE</b>	<b>ALPHA</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR / EXTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	10W - 20W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC
<b>BEAM ANGLE</b>	10°, 25°, 40°
<b>LUMEN OUTPUT</b>	1000LM – 2000LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF
<b>DIMENSIONS (mm)</b>	Q/H: 158/115
<b>PANEL CUT OUT (mm)</b>	Q: 111
<b>HOUSING</b>	DIE ALU, TEMPERED GLASS
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	66

### GAMMA ANGLES:

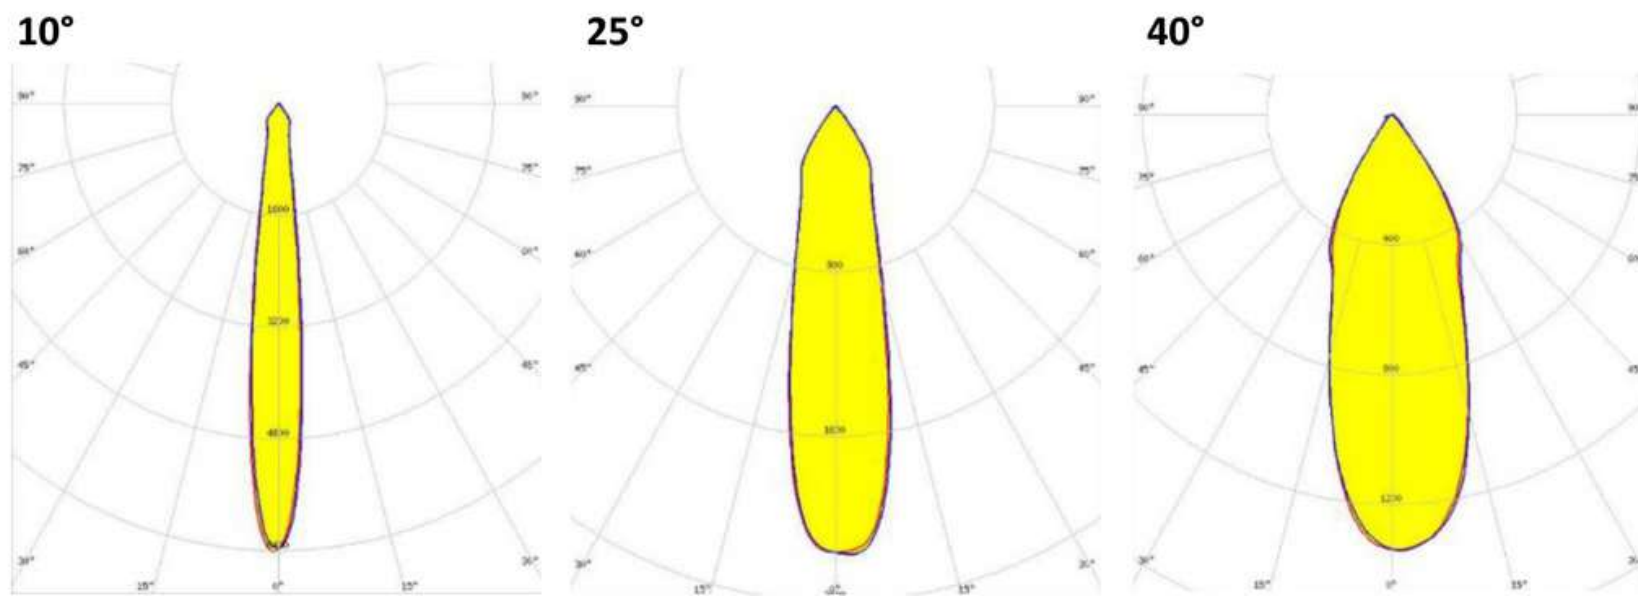

## ALXSYS AREN




MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING




DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



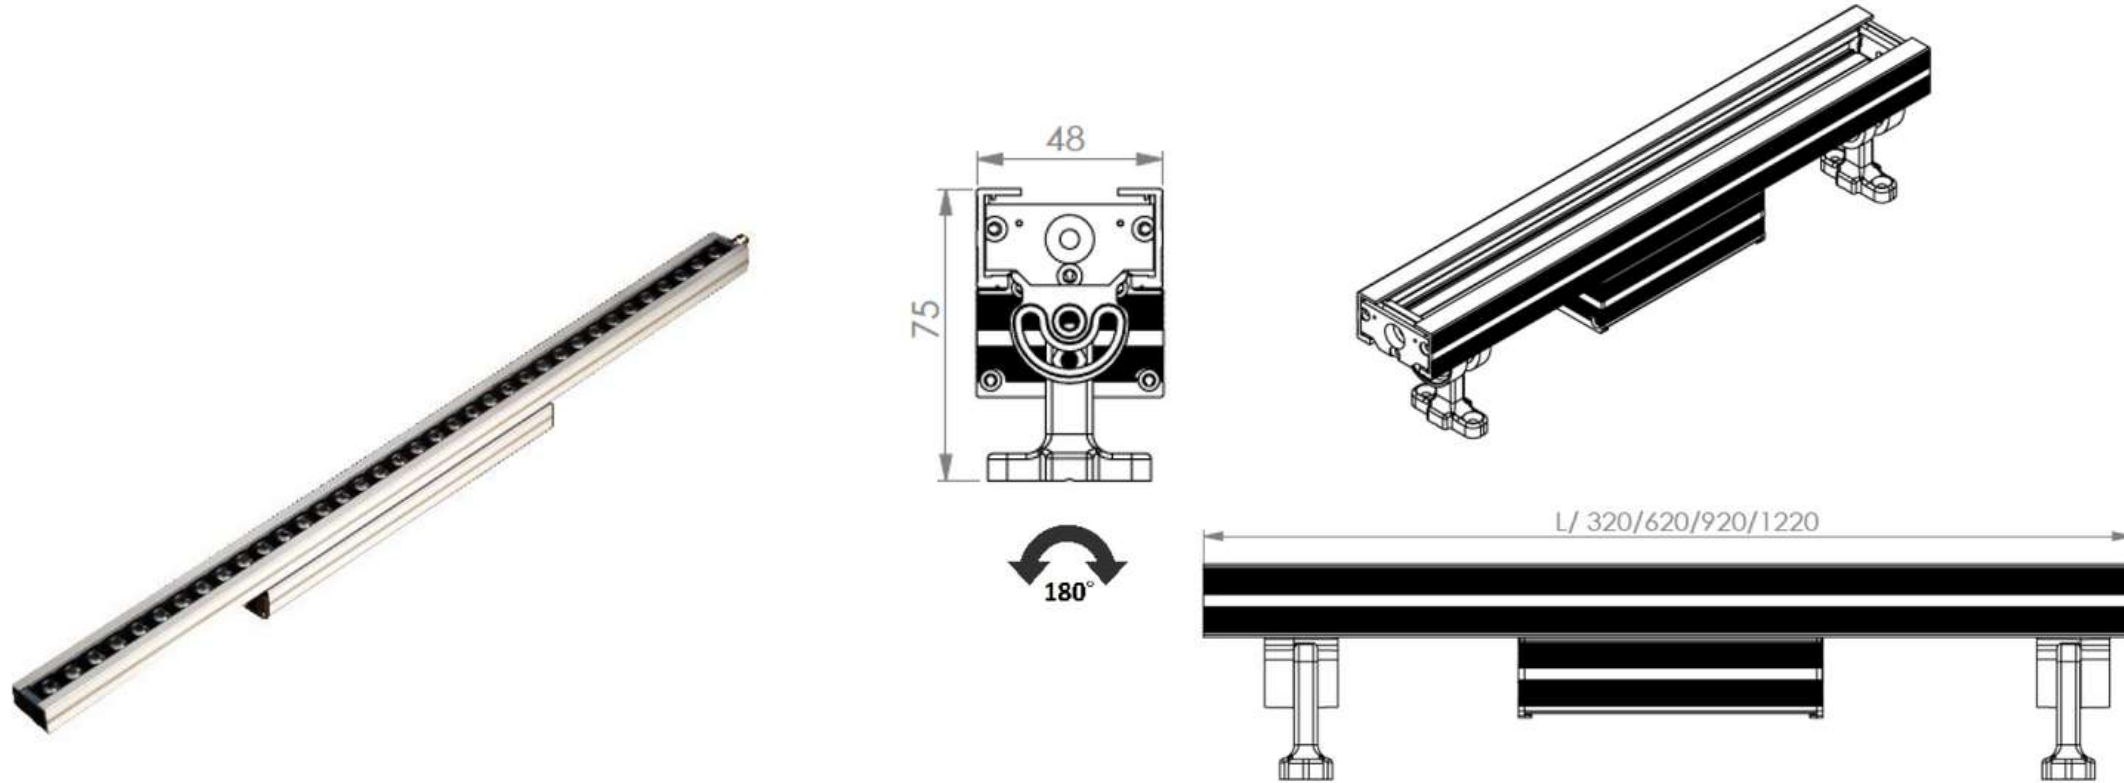

MODEL /SIZE	AREN LS32	AREN LS62	AREN LS92	AREN LS122
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	14W	27W	40W	53W
CCT	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K
CRI	80+	80+	80+	80+
VOLTAGE	180-265 VAC	180-265 VAC	180-265 VAC	180-265 VAC
BEAM ANGLE	10°, 15°, 25°, 10X60°, 20X45°	10°, 15°, 25°, 10X60°, 20X45°	10°, 15°, 25°, 10X60°, 20X45°	10°, 15°, 25°, 10X60°, 20X45°
LUMEN OUTPUT	1200LM	2700LM	4000LM	5300LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	W/H/L: 48/75/320	W/H/L: 48/75/620	W/H/L: 48/75/920	W/H/L: 48/75/1220
HOUSING	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER	RUBBER	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS	5 YEARS	5 YEARS
IP	67	67	67	67

### GAMMA ANGLES:

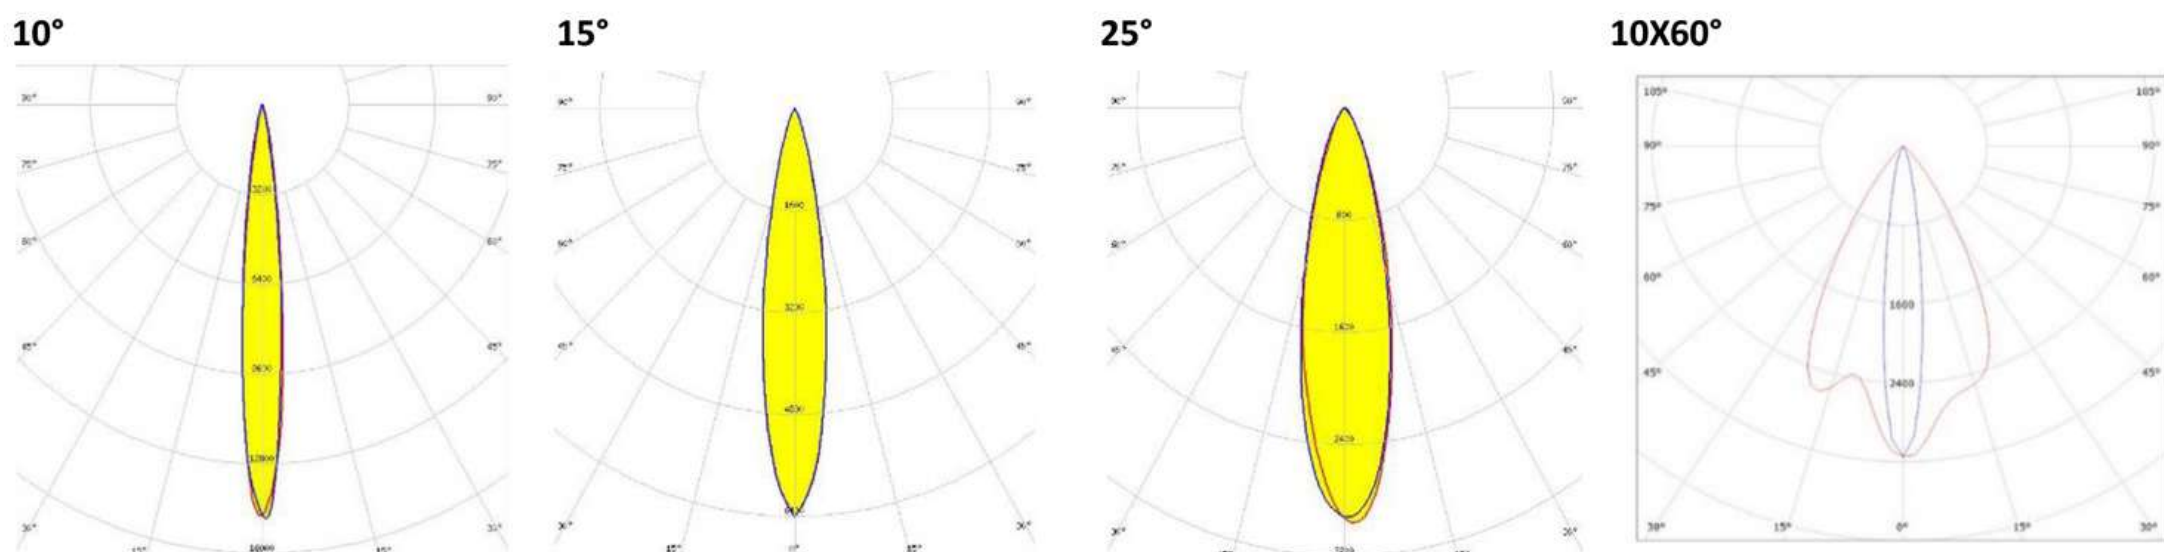

## ALXSYS ARES LOTUS



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING



DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)






# ASYS LIGHT

## ALXSYS ARES LOTUS DATASHEET

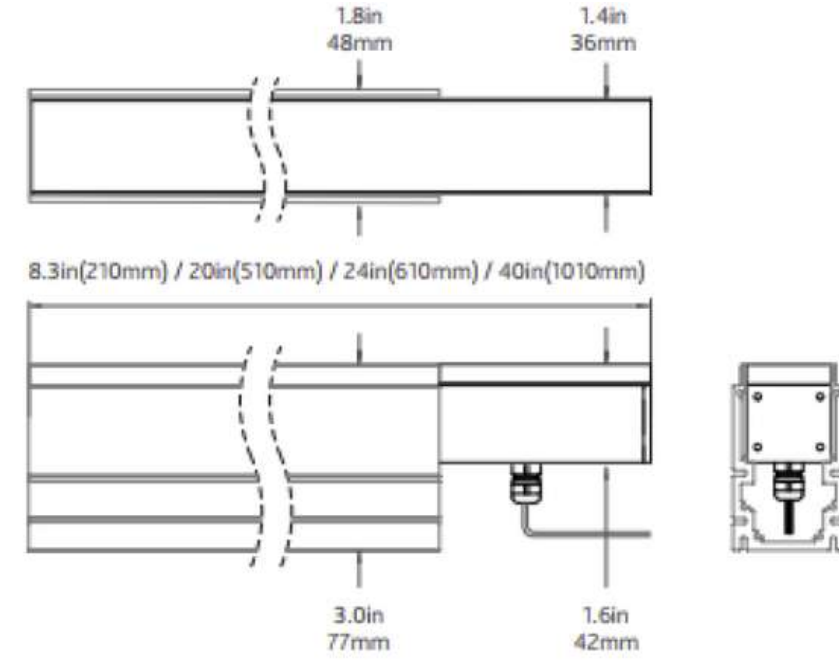

MODEL /SIZE	ARES LOTUS
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER	36W
CCT	2700K-3000K-4000K-5000K-6500K-R-G-B
CRI	80+
VOLTAGE	24 VDC / 220 VAC EXTERNAL DRIVER
BEAM ANGLE	120°
LUMEN OUTPUT	570LM/MT, 2850LM/MT
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF / DMX
DIMENSIONS (mm)	W/H: 48/77
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IP	54, 65, 68

### GAMMA ANGLES:

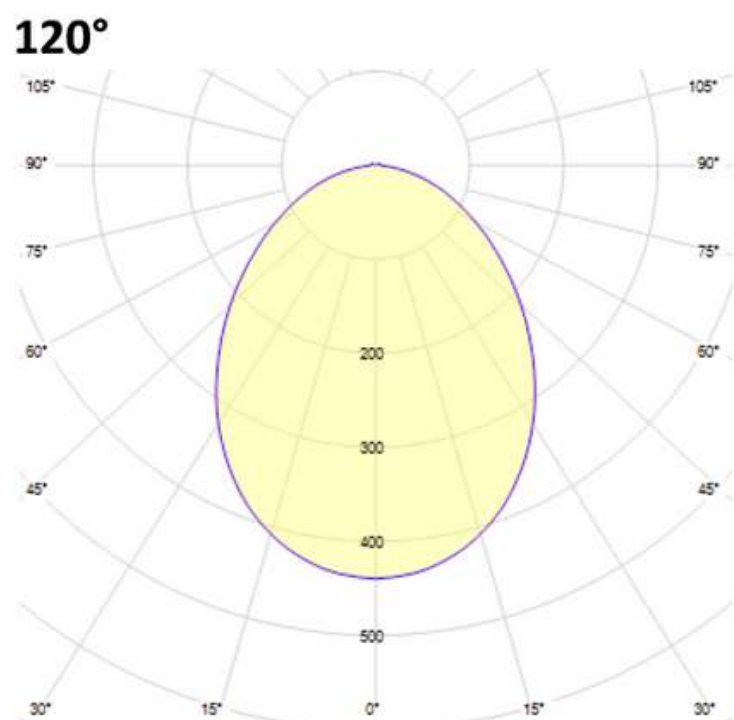

## ALXSYS BONNIE



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING



DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




# asys LIGHT

## ALXSYS BONNIE DATASHEET

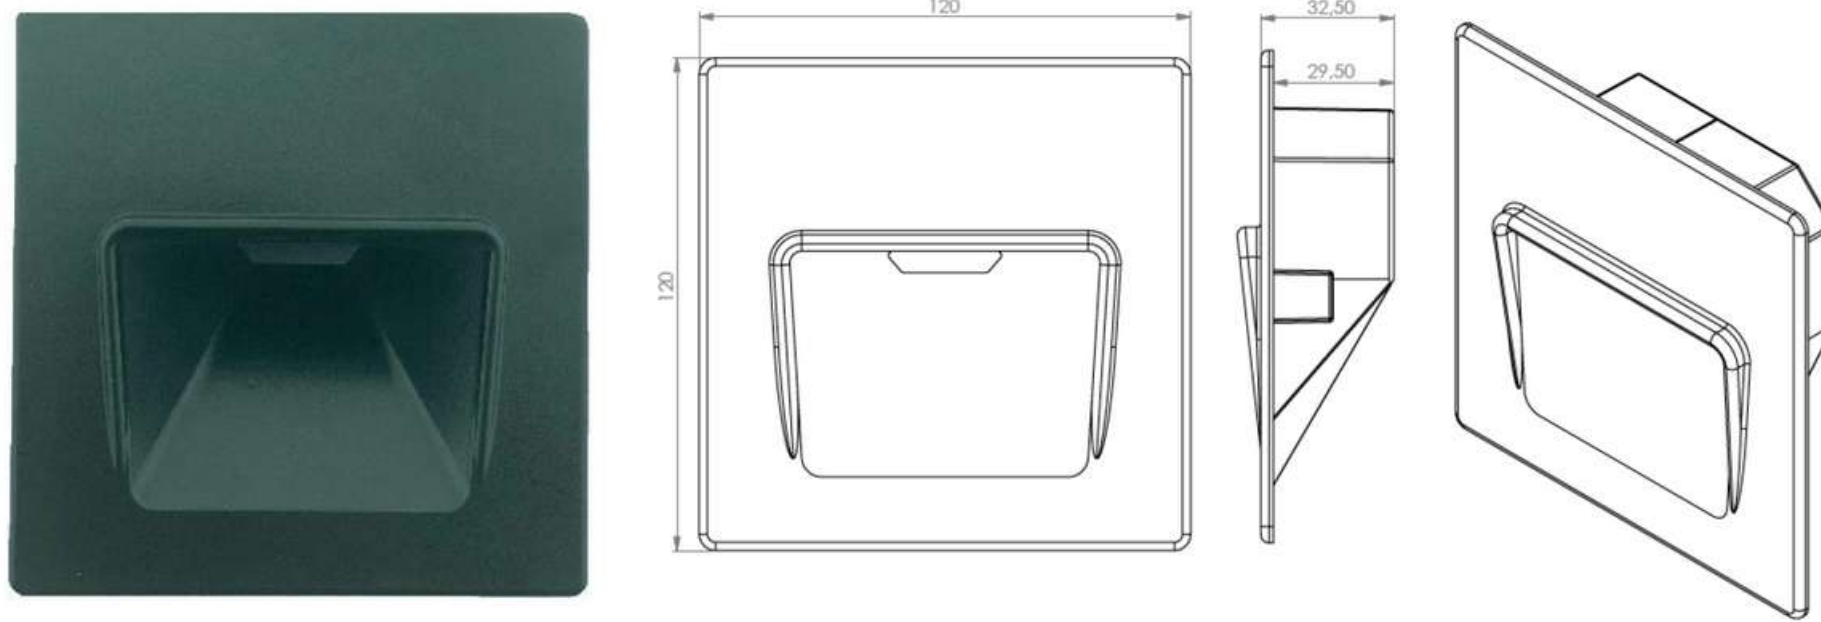

<b>MODEL /SIZE</b>	<b>BONNIE</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR / EXTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	3W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	12-24VDC
<b>BEAM ANGLE</b>	60°
<b>LUMEN OUTPUT</b>	66LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF
<b>DIMENSIONS (mm)</b>	W/H/L: 120/120/32.5
<b>HOUSING</b>	DIE ALU
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	67

### GAMMA ANGLES:

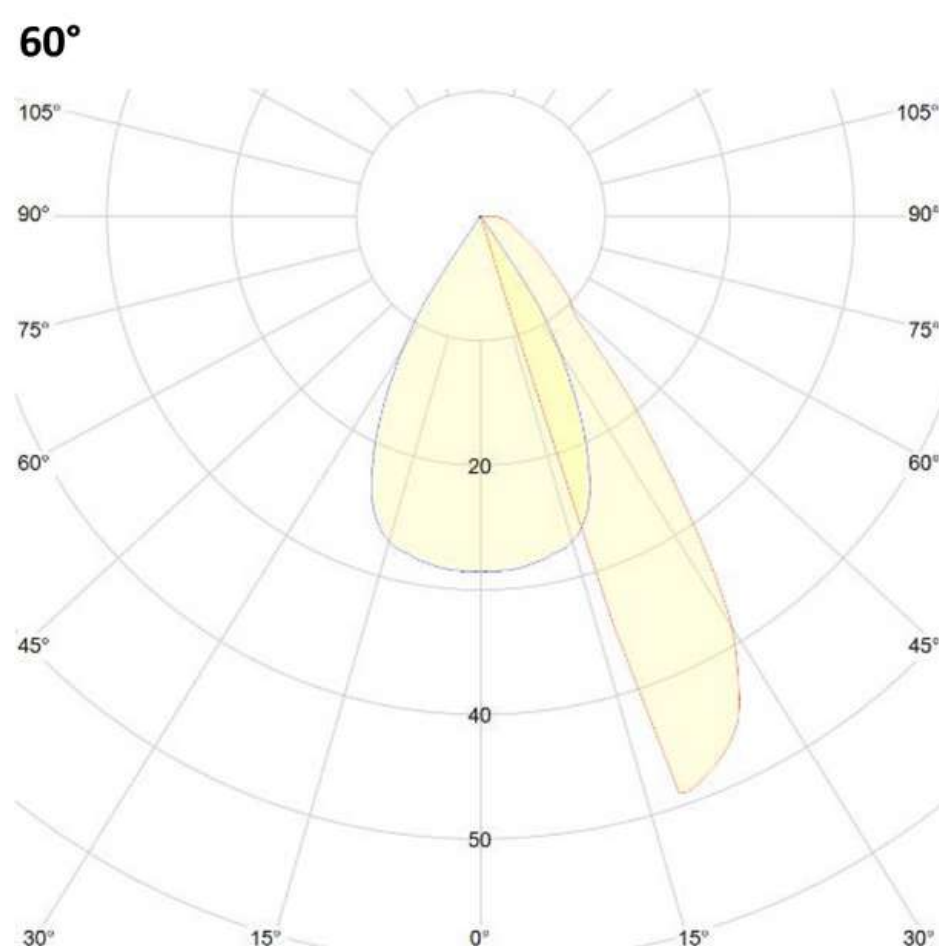

## ALXSYS CANOPPY-2



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING



PROJEKSİYON  
FLOOD LIGHTING




KANOPI AYDINLATMA  
CANOPY LIGHTING





ENDÜSTRİYEL AYDINLATMA  
INDUSTRIAL LIGHTING



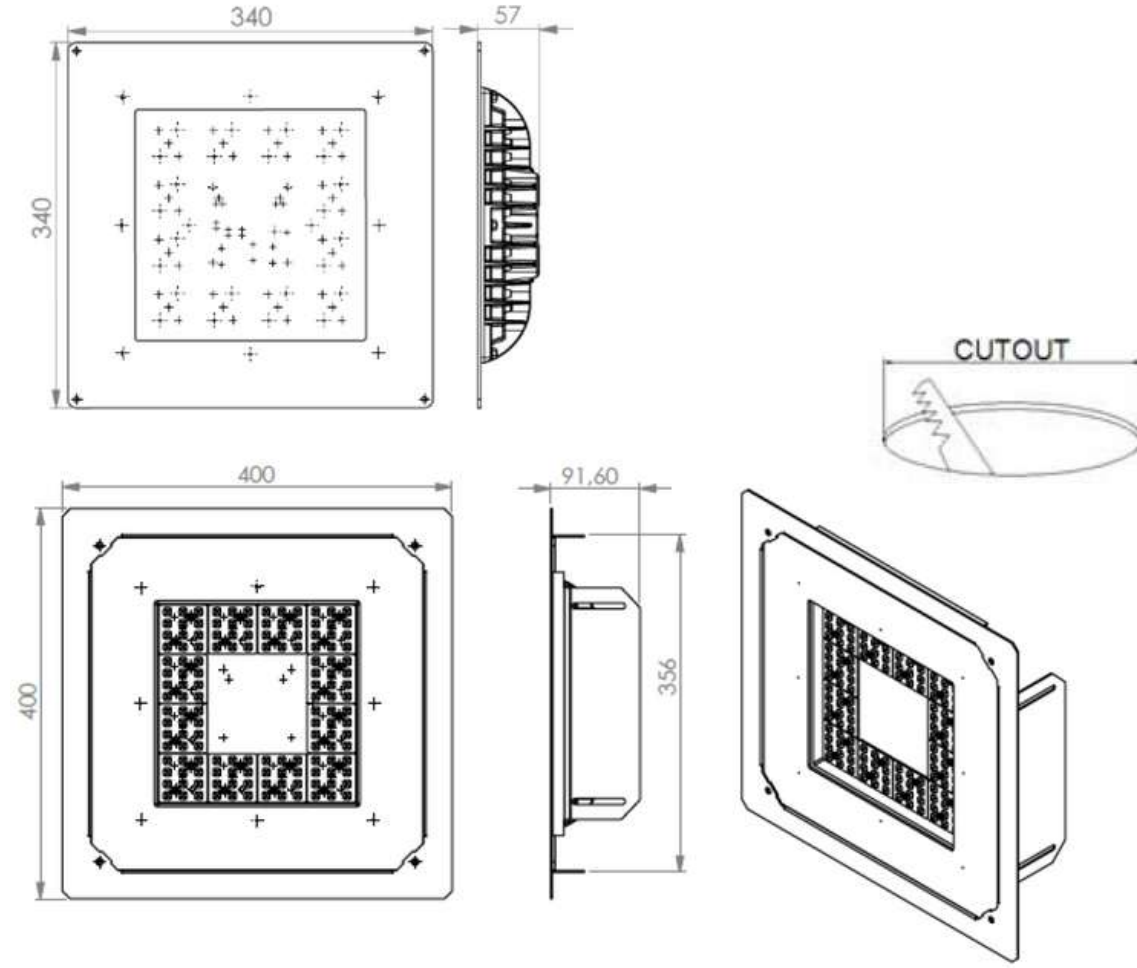

MODEL /SIZE	CANOPPY-65	CANOPPY-75	CANOPPY-100
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR
LED	SAMSUNG	SAMSUNG	SAMSUNG
POWER	65W	75W	100W
CCT	2700K-3000K-4000K-5000K-6500K	2700K-3000K-4000K-5000K-6500K	2700K-3000K-4000K-5000K-6500K
CRI	80+	80+	80+
VOLTAGE	180-265 VAC	180-265 VAC	180-265 VAC
BEAM ANGLE	60° ,90°	60° ,90°	60° ,90°
LUMEN OUTPUT	8000LM	9000LM	11500LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C	-40C / +60C
CONTROL	ON-OFF	ON-OFF	ON-OFF
DIMENSIONS (mm)	W/H/L: 340/340/57	W/H/L: 340/340/57	W/H/L: 340/340/57
PANEL CUT OUT (mm)	W/H: 360/360	W/H: 360/360	W/H: 360/360
HOUSING	DIE ALU, EXT ALU, TEMPERED GLASS	DIE ALU, EXT ALU, TEMPERED GLASS	DIE ALU, EXT ALU, TEMPERED GLASS
CABLES	RUBBER	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS	5 YEARS
IP	67	67	67


### GAMMA ANGLES:

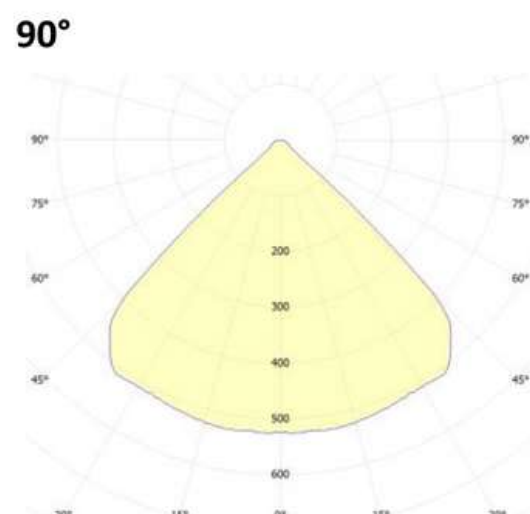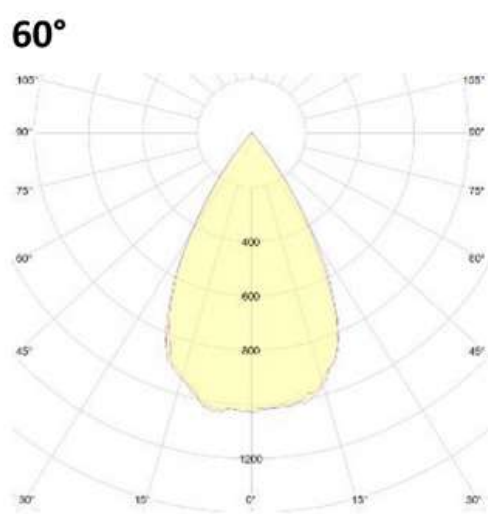

## ALXSYS CLYDE



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

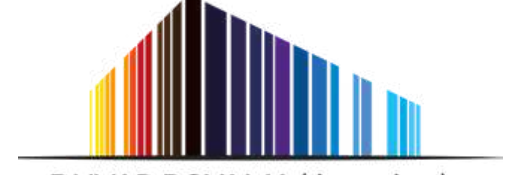

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




# ASYS LIGHT

ALXSYS CLYDE DATASHEET

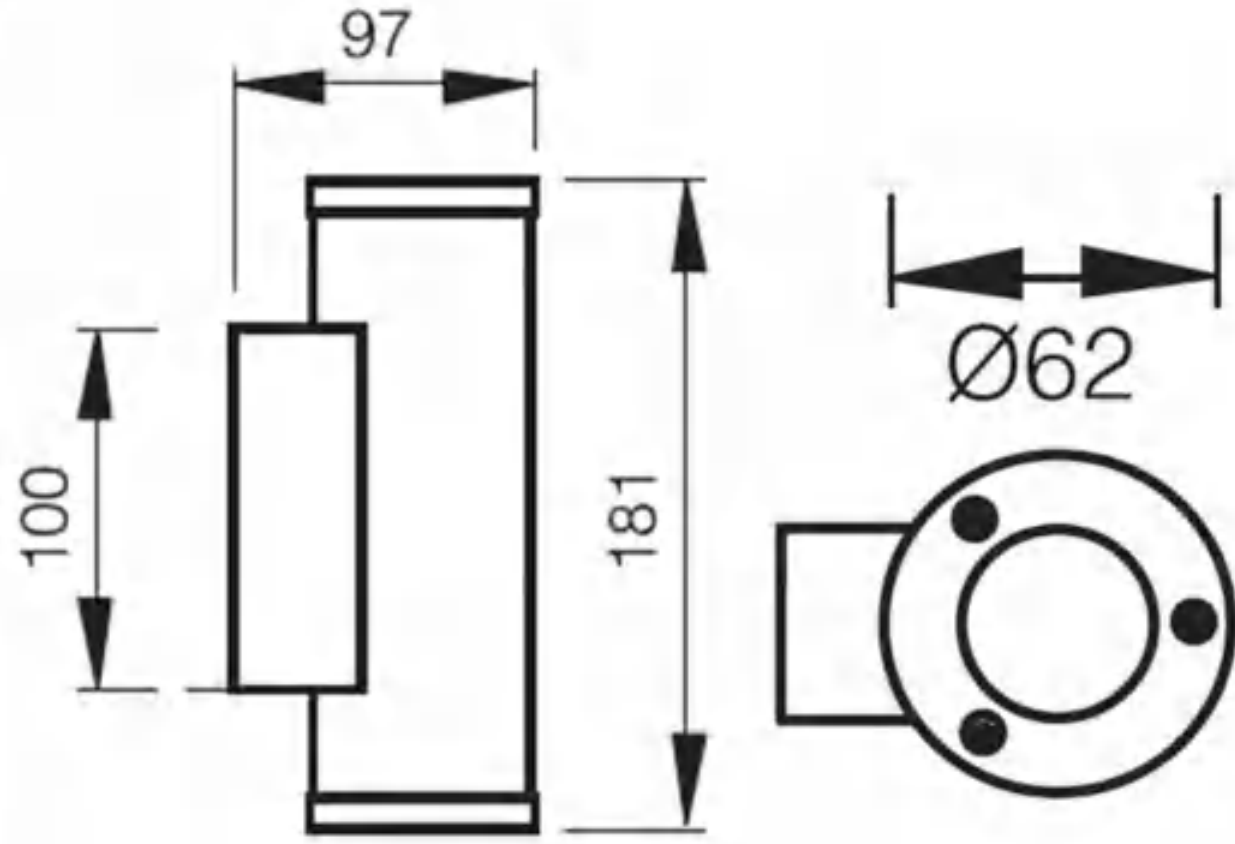

MODEL /SIZE	CLYDE	CLYDE
INTERIOR/EXTERIOR	EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	10W	10W
CCT	2700K-3000K-4000K	2700K-3000K-4000K
CRI	80+	80+
VOLTAGE	180-265 VAC	180-265 VAC
BEAM ANGLE	10°,25°,40°,	10°,25°,40°,
LUMEN OUTPUT	88LM	88LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF	ON-OFF
DIMENSIONS (mm)	Q/H: 62/181	Q/H: 62/181
HOUSING	EXT ALU	EXT ALU
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	67	20


**GAMMA ANGLES:**

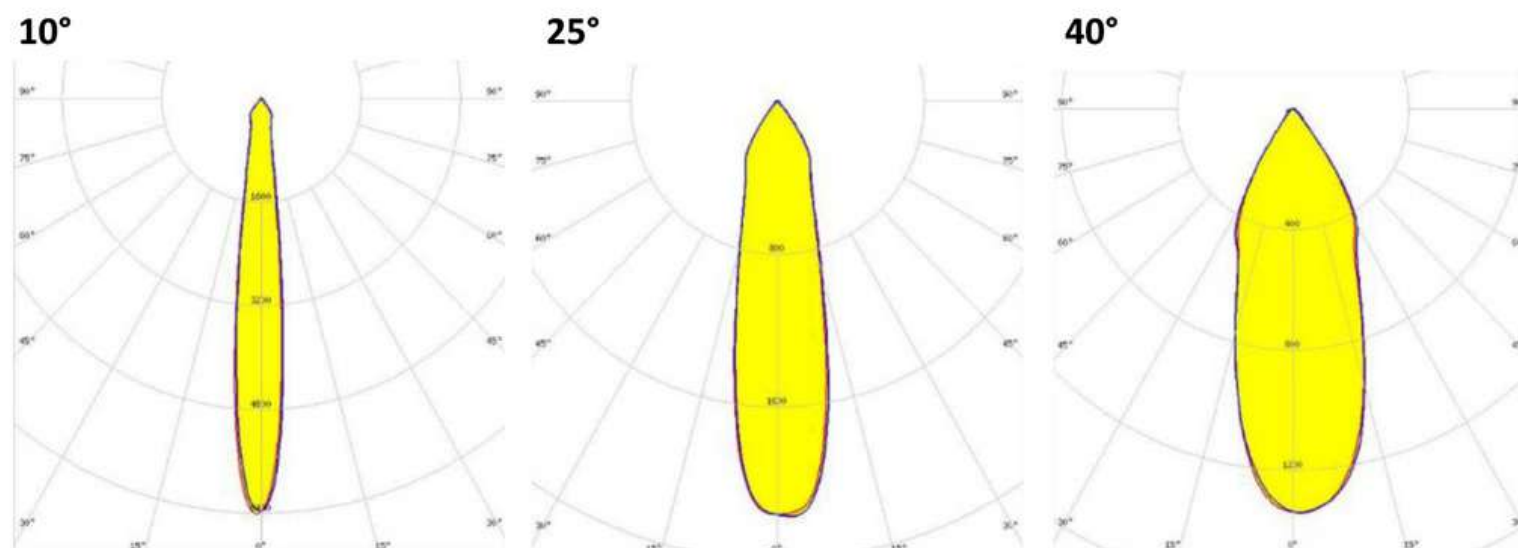

## ALXSYS CLYDE-X



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

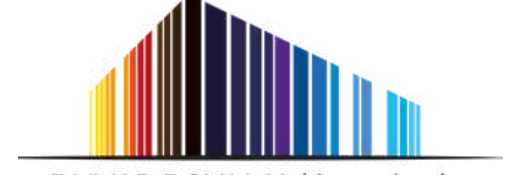

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)





# ASYS LIGHT


## ALXSYS CLYDE-X DATASHEET

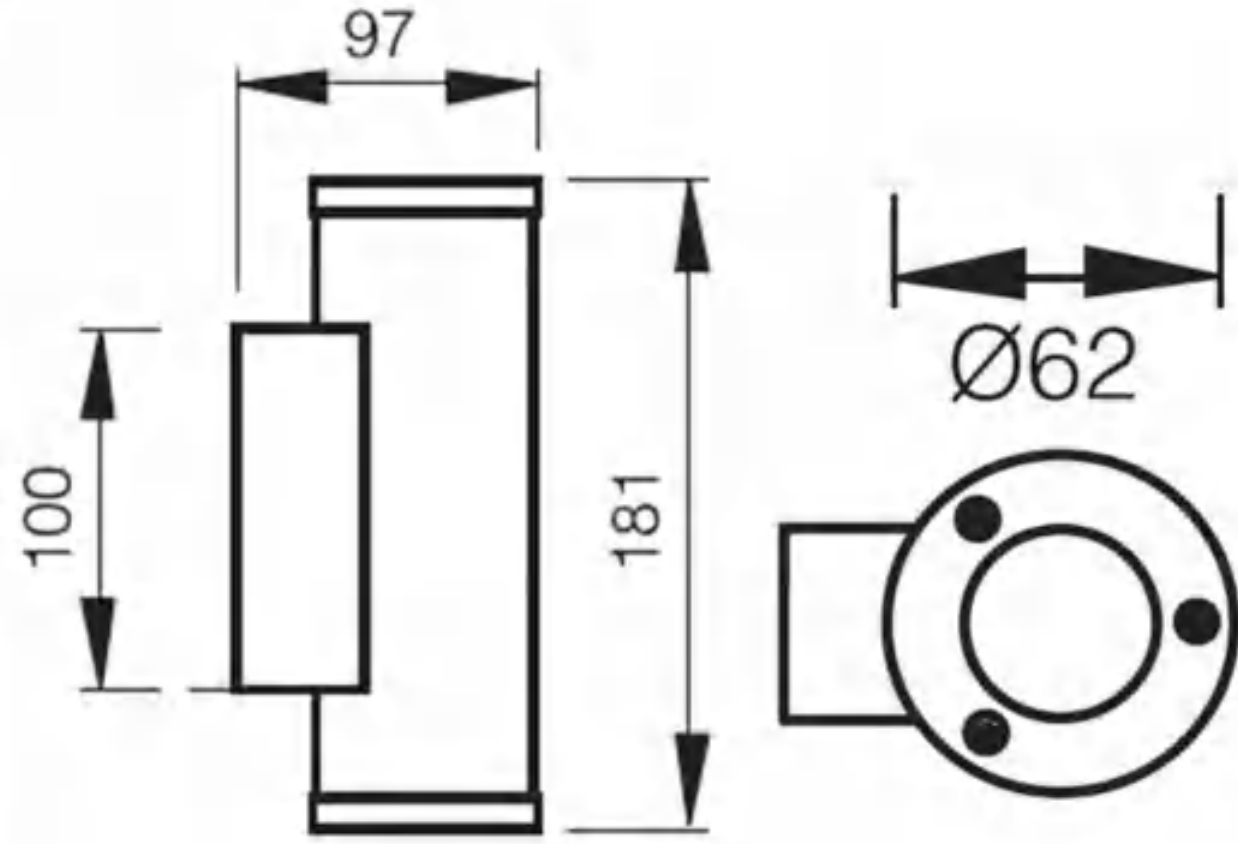


MODEL /SIZE	CLYDE X	CLYDE X
INTERIOR/EXTERIOR	EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	10W	10W
CCT	2700K-3000K-4000K	2700K-3000K-4000K
CRI	80+	80+
VOLTAGE	180-265 VAC	180-265 VAC
BEAM ANGLE	10°x40°, 25°x40°	10°x40°, 25°x40°
LUMEN OUTPUT	88LM	88LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF	ON-OFF
DIMENSIONS (mm)	Q/H: 62/181	Q/H: 62/181
HOUSING	EXT ALU	EXT ALU
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	67	20

### GAMMA ANGLES:

10°x40°

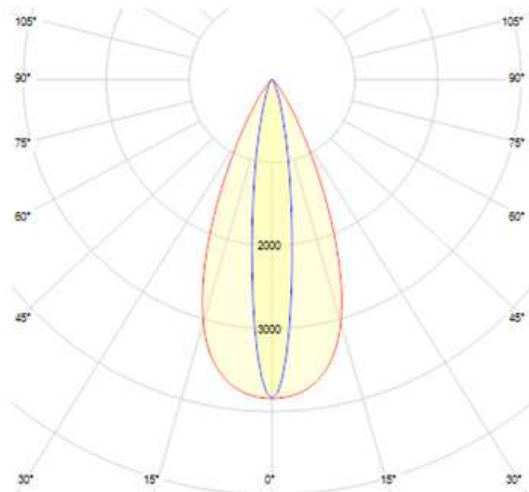


25°x 40°

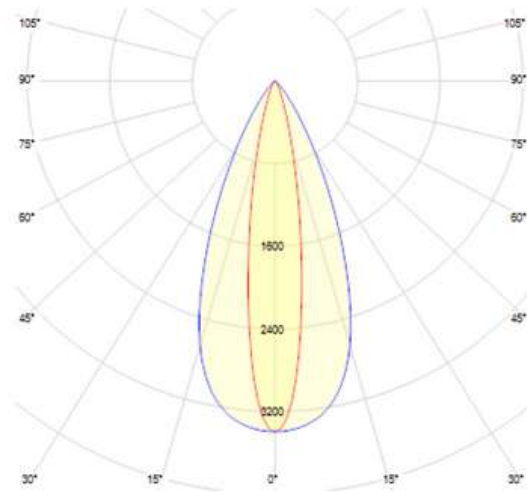

## ALXSYS DAISY



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

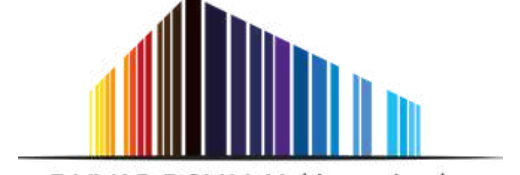

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING




MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING



DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




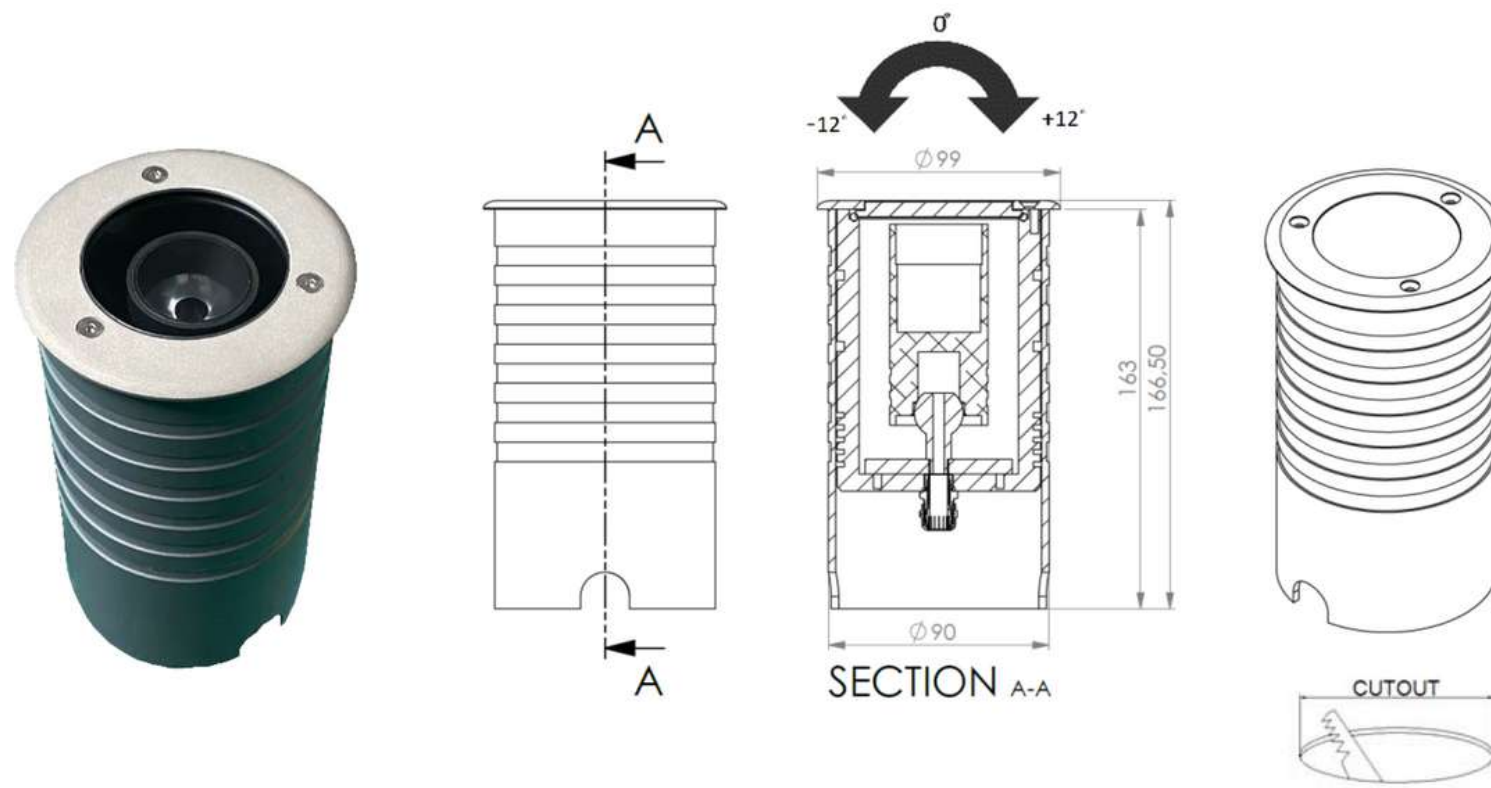


<b>MODEL /SIZE</b>	<b>DAISY</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR / EXTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	6W
<b>CCT</b>	2700K-3000K-4000K-5000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	10°-30°
<b>LUMEN OUTPUT</b>	480LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF / DALI
<b>DIMENSIONS (mm)</b>	Q/H: 99 / 166,5
<b>PANEL CUT OUT (mm)</b>	Q:92
<b>HOUSING</b>	EXT ALU / TEMPERED GLASS
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	67

**GAMMA ANGLE:**

**10°**

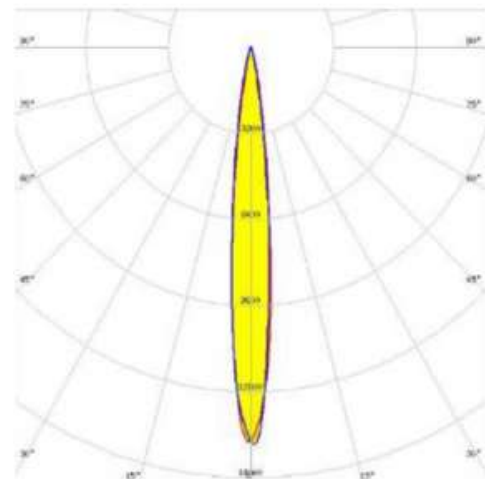


**30°**

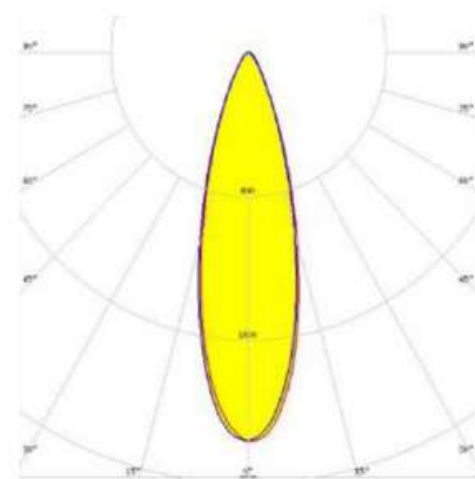

## ALXSYS DINO




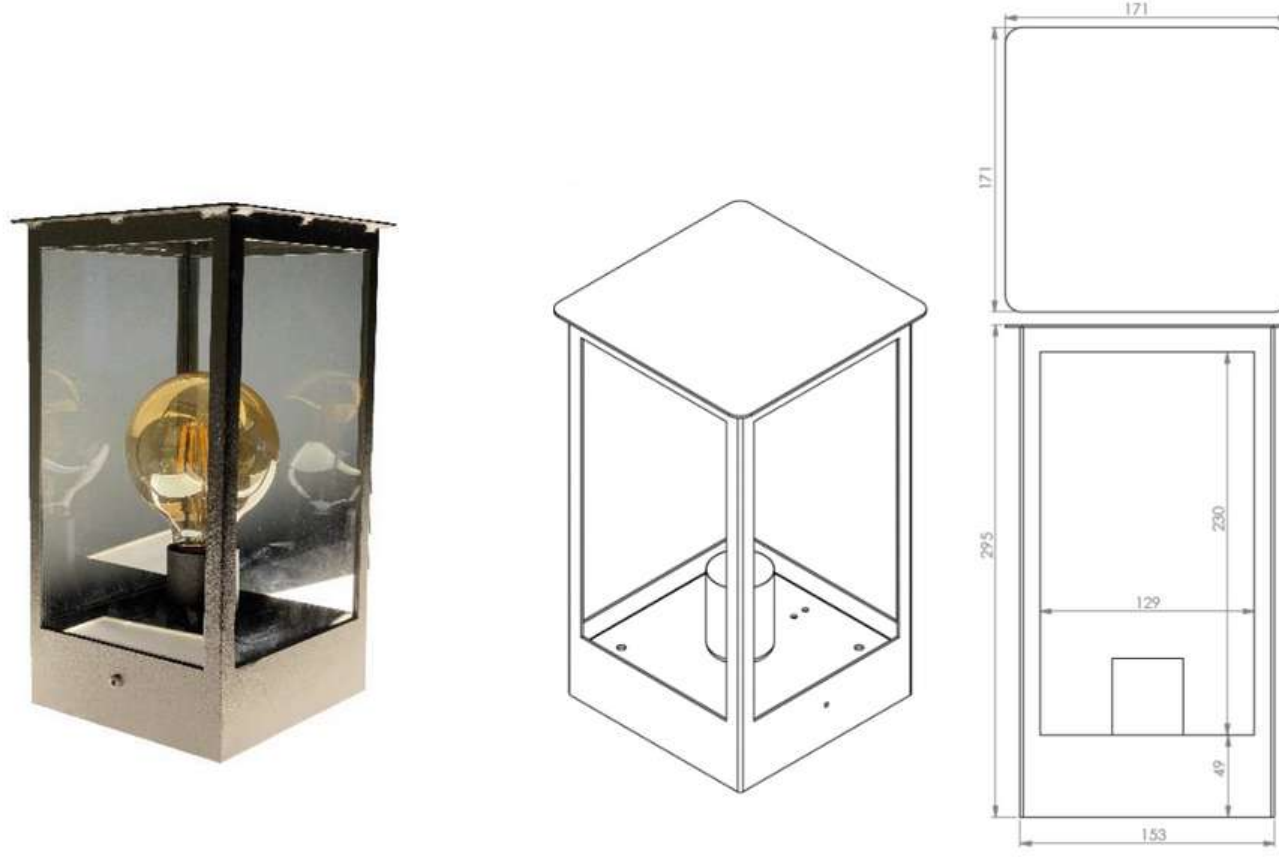

MODEL /SIZE	DINO
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	LED BULB
POWER	5W
CCT	2700K-3000K-4000K-6500K
CRI	80+
VOLTAGE	180-265 VAC
BEAM ANGLE	360°
LUMEN OUTPUT	300LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF
DIMENSIONS (mm)	W/H/L: 171/171/295
HOUSING	EXT. ALU, TEMPERED GLASS
CABLES	RUBBER
WARRANTY	5 YEARS
IP	65


### GAMMA ANGLES:

360°

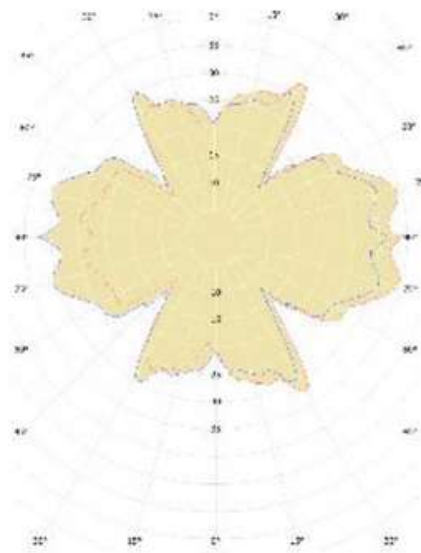

## ALXSYS EBRA




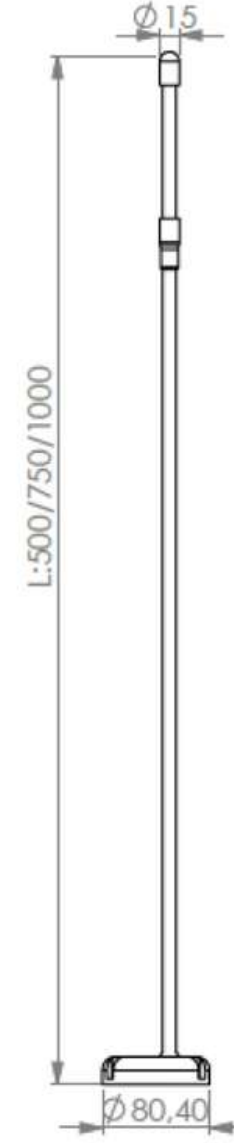

<b>MODEL /SIZE</b>	<b>EBRA</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR / EXTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	3W
<b>CCT</b>	2700K-3000K-4000K-5000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	12-24VDC
<b>BEAM ANGLE</b>	360°
<b>LUMEN OUTPUT</b>	170LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF
<b>DIMENSIONS (mm)</b>	Q/L: 15/500-750-1000
<b>HOUSING</b>	DIE ALU, PMMA, ABS
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	65

### GAMMA ANGLES:


360°

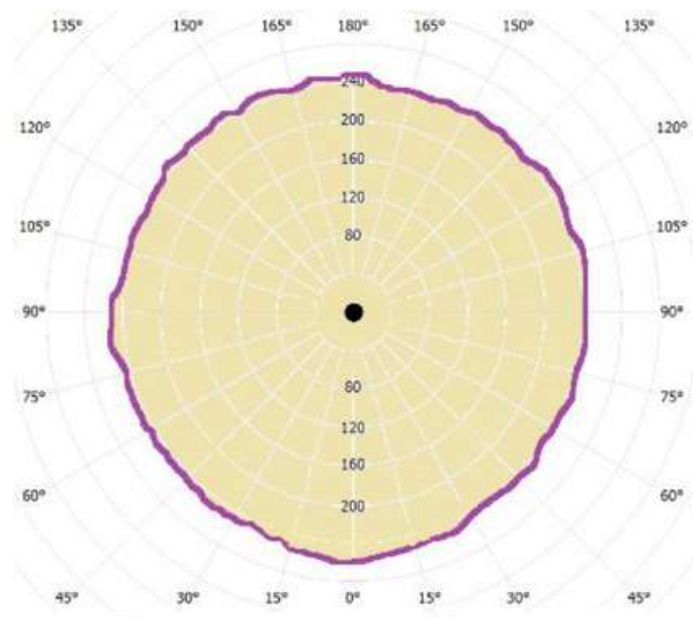

## ALXSYS ELA



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

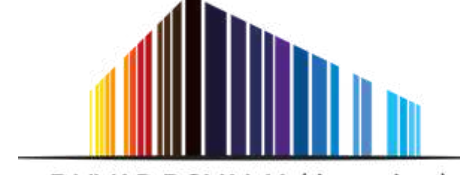

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)






# ASYS LIGHT

## ALXSYS ELA DATASHEET

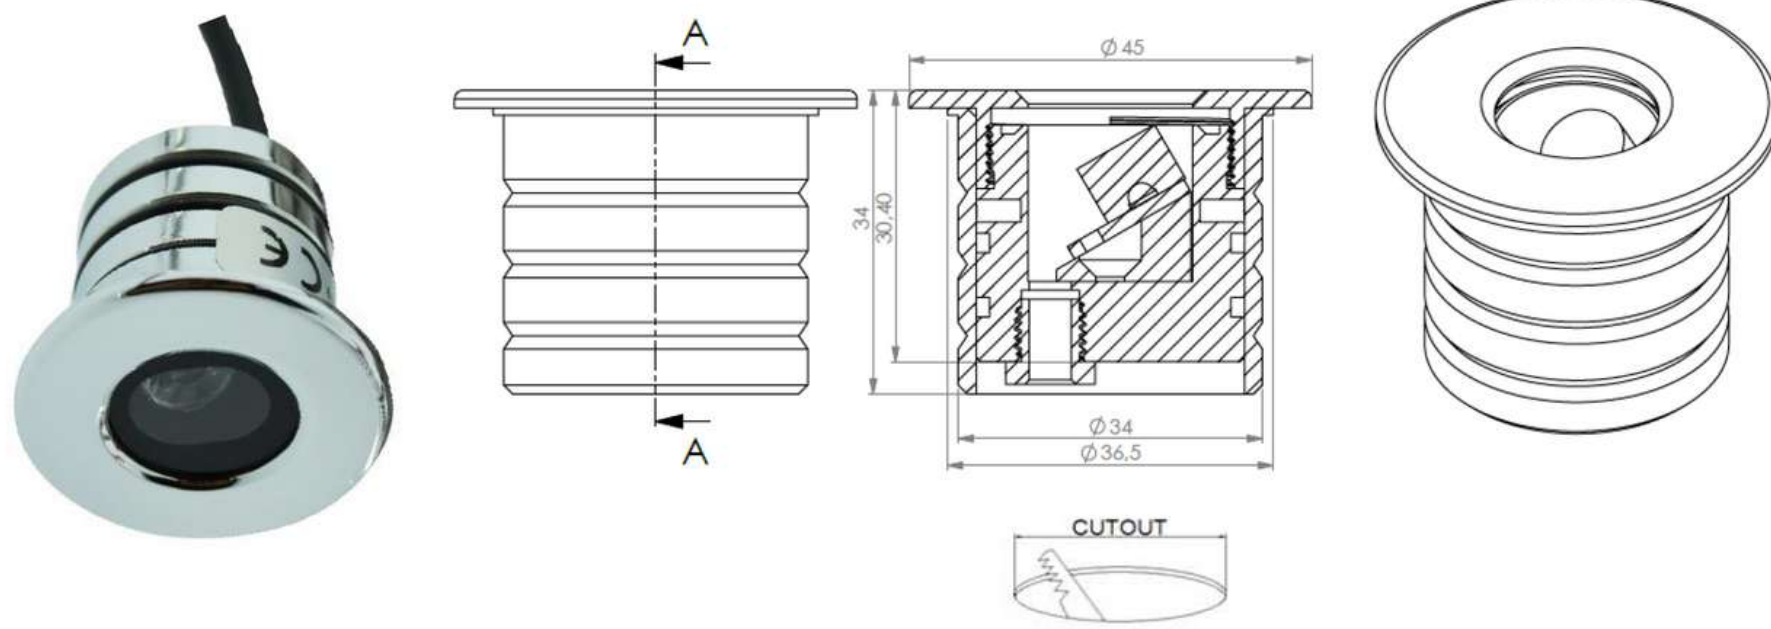

<b>MODEL /SIZE</b>	<b>ELA</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR / EXTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	1W- 2W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	45°
<b>LUMEN OUTPUT</b>	88LM- 160LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF
<b>DIMENSIONS (mm)</b>	Q/H: 45/34
<b>PANEL CUT OUT (mm)</b>	Q: 38
<b>HOUSING</b>	EXT ALU, UV STABILIZED PMMA
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	54


### GAMMA ANGLES:

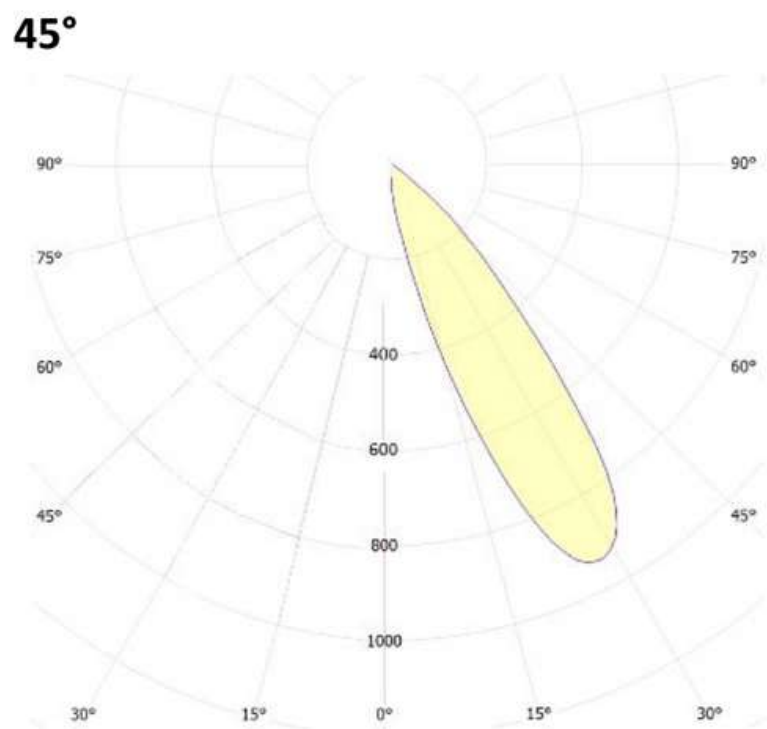

## ALXSYS ERA



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

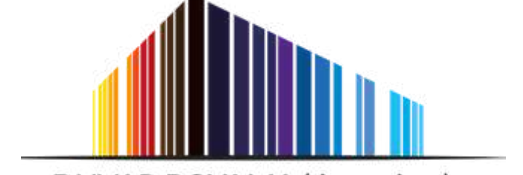

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




# ASYS LIGHT

ALXSYS ERA DATASHEET

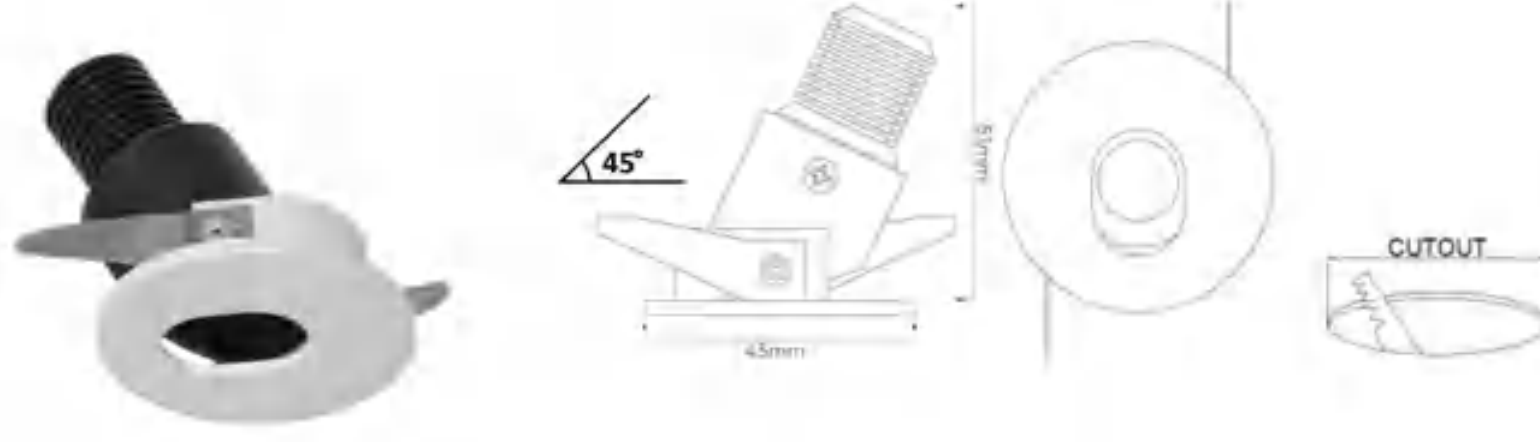

MODEL /SIZE	ERA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER	1W
CCT	2700K-3000K-4000K-6500K
CRI	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
BEAM ANGLE	20°
LUMEN OUTPUT	95LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF / DALI
DIMENSIONS (mm)	Q/H: 45/51
PANEL CUT OUT (mm)	Q: 35
HOUSING	EXT. ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IP	20


## GAMMA ANGLES:

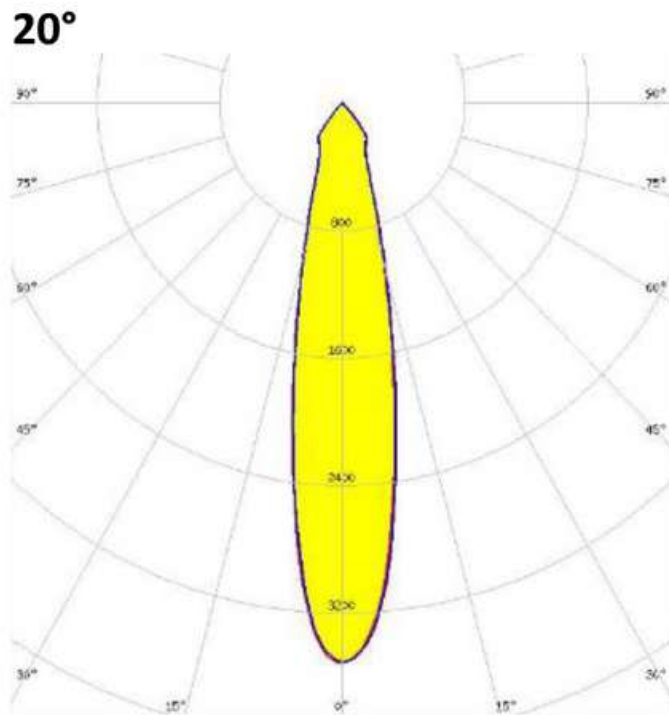

## ALXSYS EVA



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

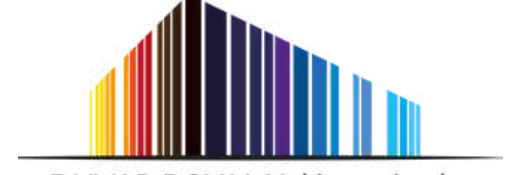

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING






DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




# asys LIGHT

## ALXSYS EVA DATASHEET

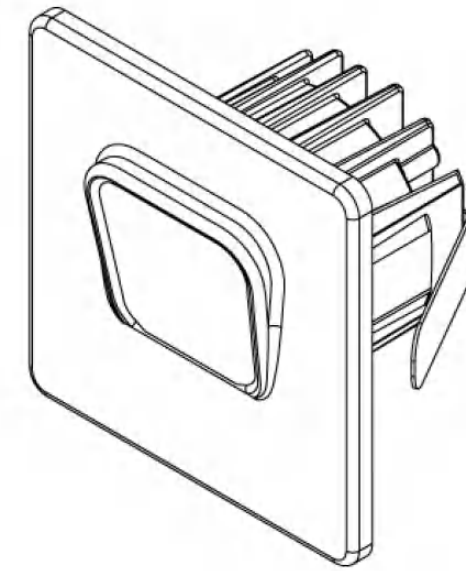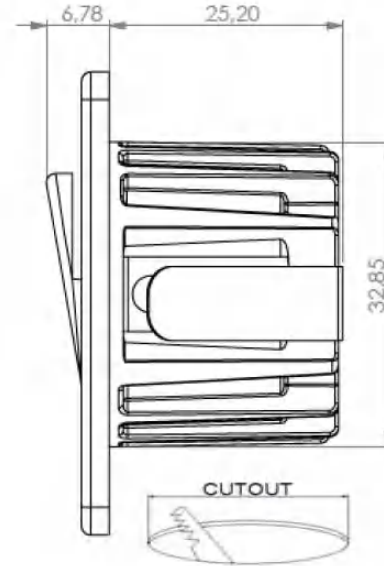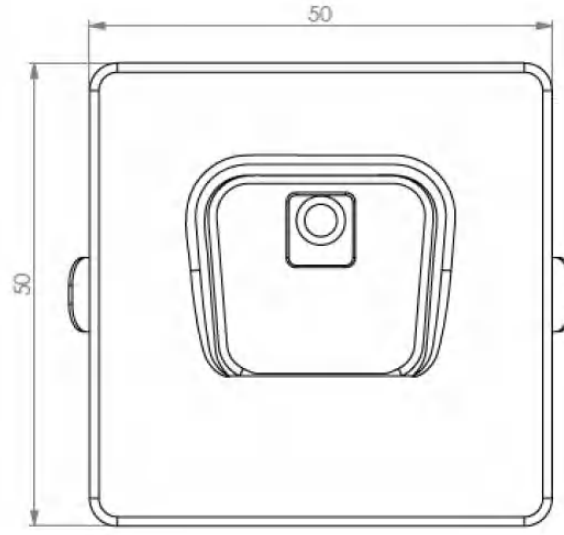

MODEL /SIZE	EVA
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER	3W
CCT	2700K-3000K-4000K-6500K
CRI	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
BEAM ANGLE	60°
LUMEN OUTPUT	90 LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF
DIMENSIONS (mm)	W/H/L: 50/50/32
PANEL CUT OUT (mm)	Q: 37
HOUSING	DIE ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IP	IP67


### GAMMA ANGLES:

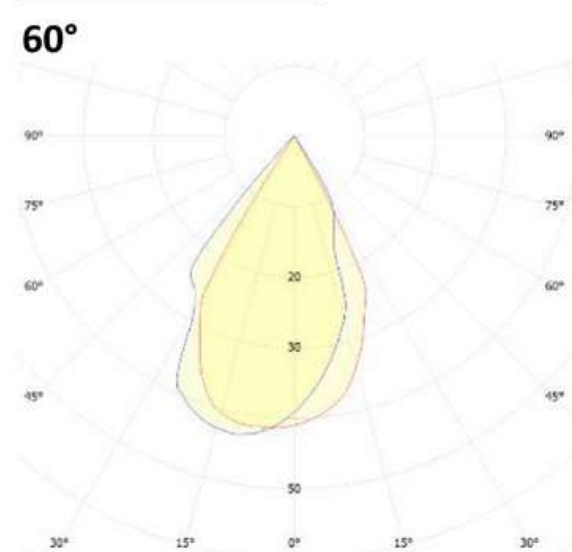

## ALXSYS GAIA



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

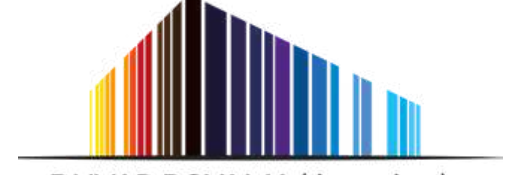

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)



# ASYS LIGHT

## ALXSYS GAIA DATASHEET

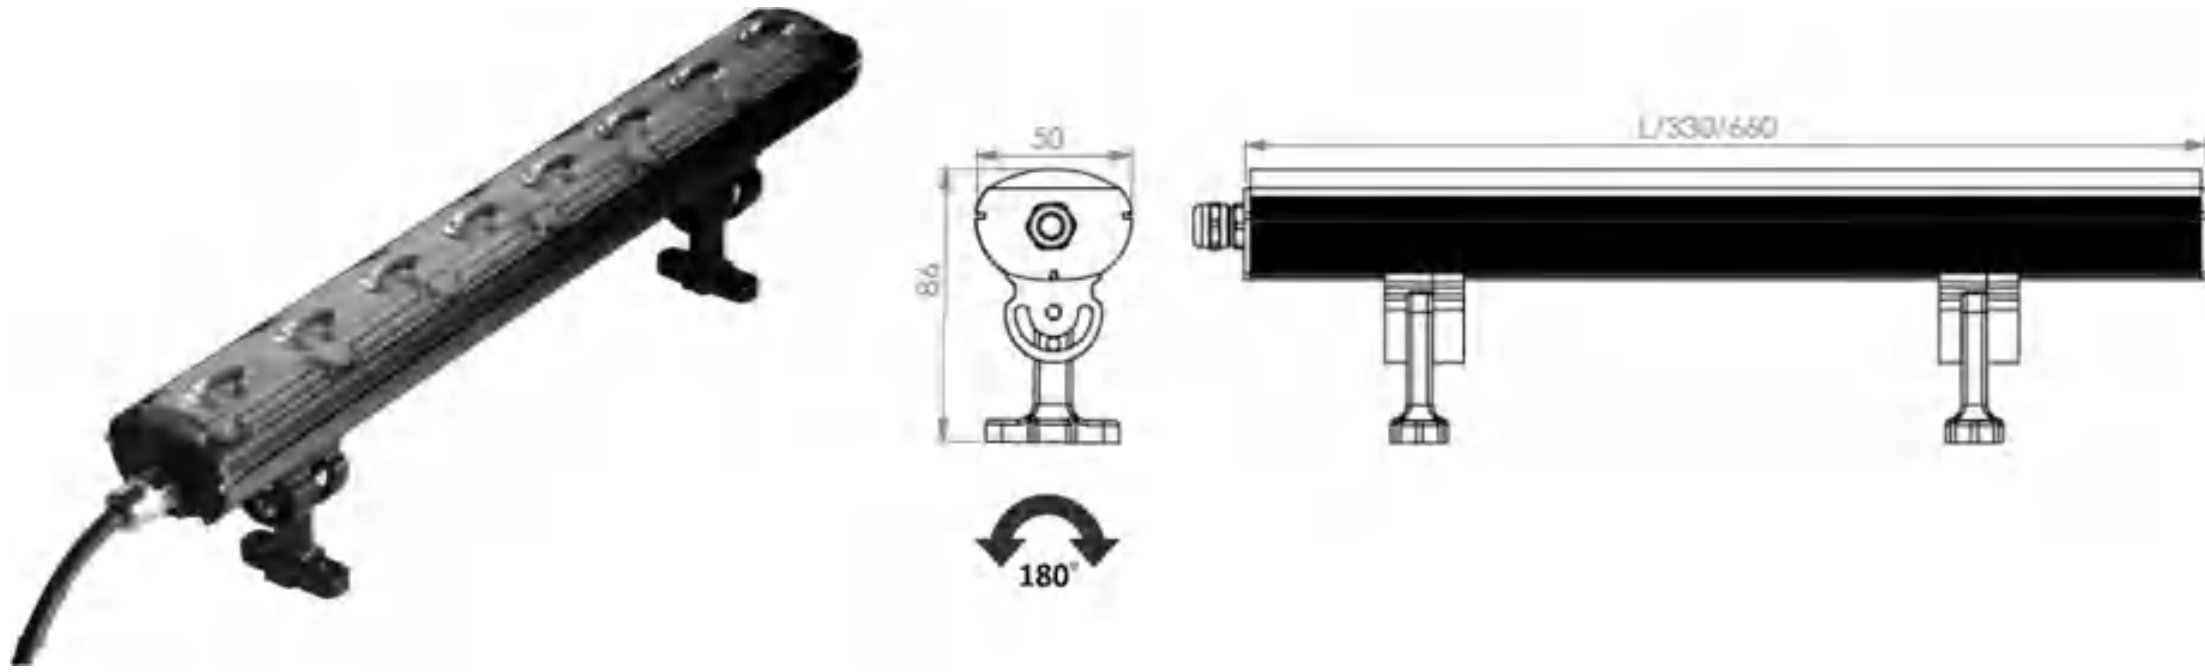

MODEL /SIZE	GAIA LS33	GAIA LS66
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	12W	24W
CCT	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K
CRI	80+	80+
VOLTAGE	180-265 VAC	180-265 VAC
BEAM ANGLE	10X60°	10X60°
LUMEN OUTPUT	1080LM	2160LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF	ON-OFF
DIMENSIONS (mm)	W/H/L: 50/86/330	W/H/L: 50/86/660
HOUSING	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	67	67

### GAMMA ANGLES:

10X60°



## ALXSYS KEA



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)






# asys LIGHT

## ALXSYS KEA DATASHEET

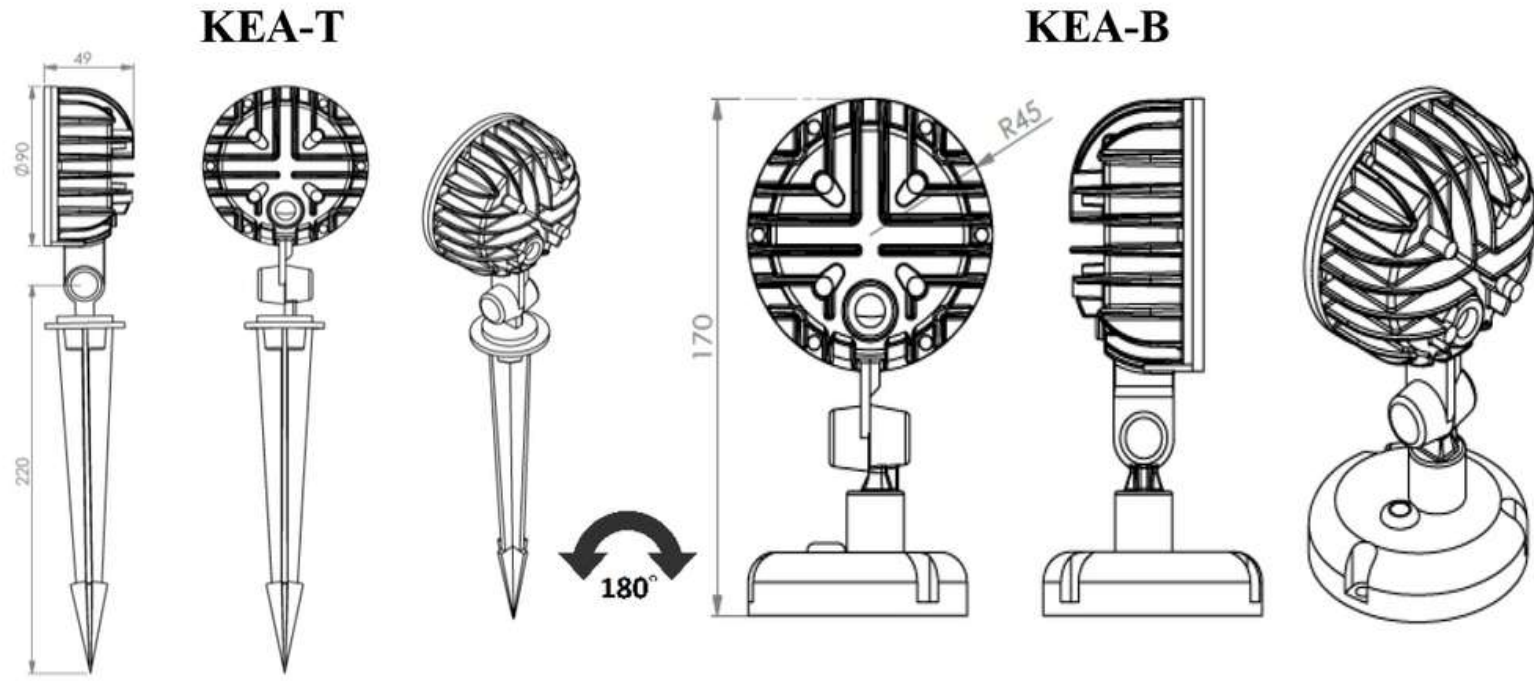

MODEL /SIZE	KEA-T	KEA-B
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	10-15W	10-15W
CCT	2700K-3000K-4000K	2700K-3000K-4000K
CRI	80+	80+
VOLTAGE	48VDC / 220VAC	48VDC / 220VAC
BEAM ANGLE	10° - 25° - 40°	10° - 25° - 40°
LUMEN OUTPUT	1100LM-1650LM	1100LM-1650LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF	ON-OFF
DIMENSIONS (mm)	Q/H: 90/330	Q/H: 90/170
HOUSING	DIE ALU, TEMPERED GLASS	DIE ALU, TEMPERED GLASS
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	67	67


### GAMMA ANGLES:

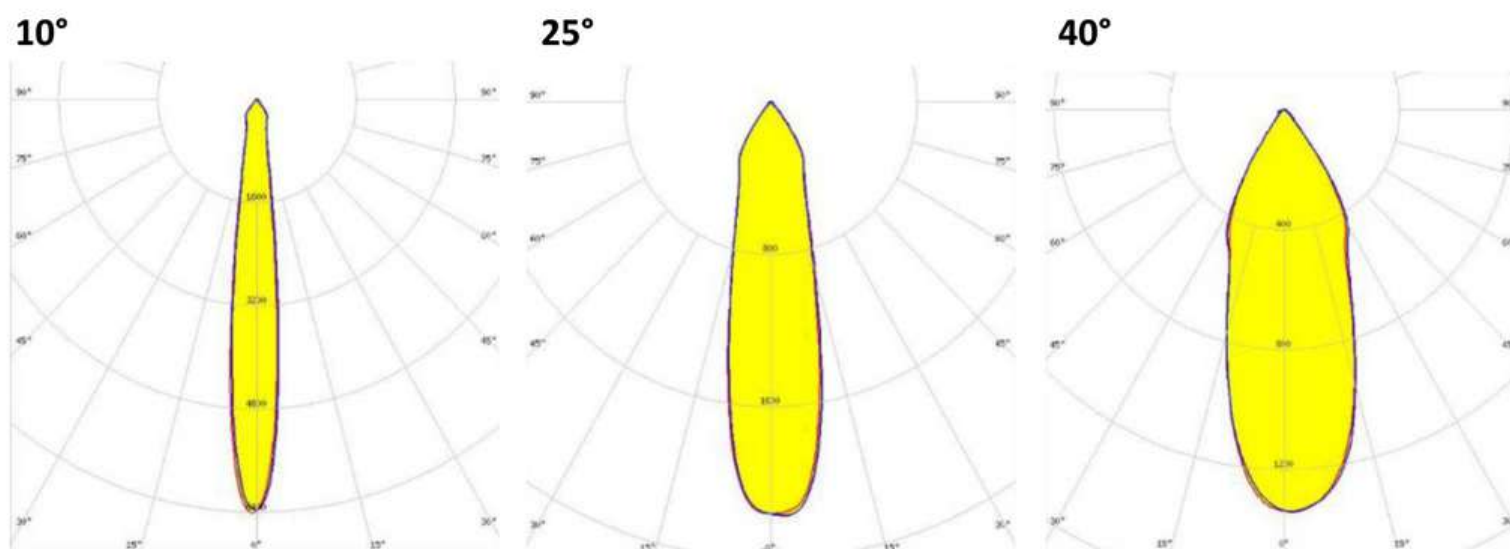

## ALXSYS KİNA



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

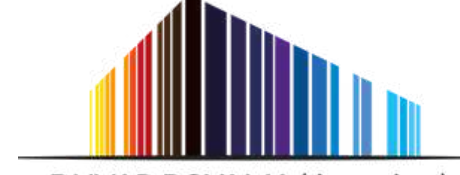

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING







DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)






# ASYS LIGHT

## ALXSYS KINA DATASHEET

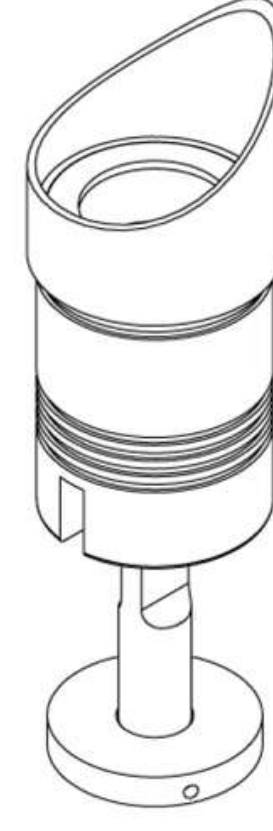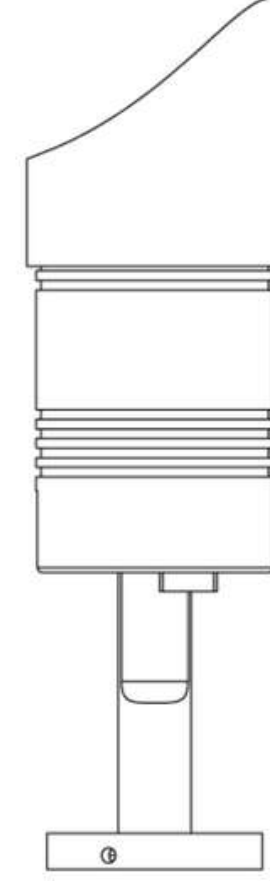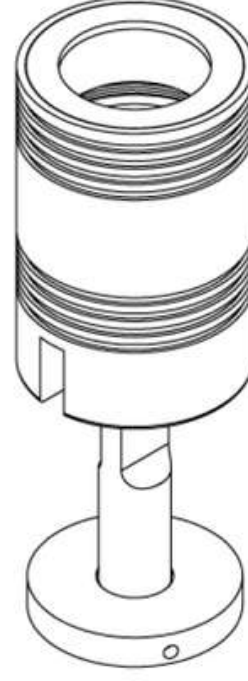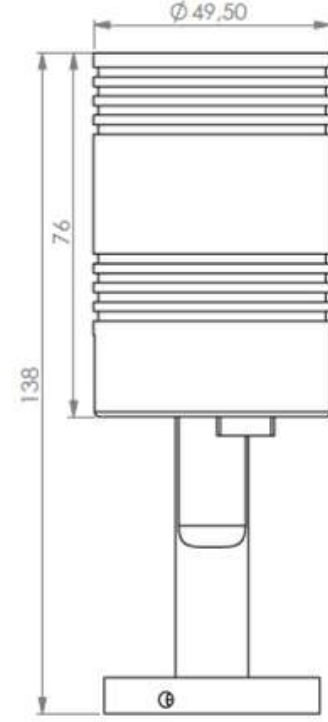


MODEL /SIZE	KINA-3W	KINA-6W
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	3W	6W
CCT	2700K-3000K-4000K-5000K-6500K	2700K-3000K-4000K-5000K-6500K
CRI	80+	80+
VOLTAGE	180-265VAC / EXTERNAL DRIVER	180-265VAC / EXTERNAL DRIVER
BEAM ANGLE	4° - 10° - 30°	4° - 10° - 30°
LUMEN OUTPUT	246LM	480LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	Q/H: 49,5/138	Q/H: 49,5/138
HOUSING	EXT. ALU, TEMPERED GLASS, HONEYCOMB LOUVRE	EXT. ALU, TEMPERED GLASS, HONEYCOMB LOUVRE
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	67	67

### GAMMA ANGLES:

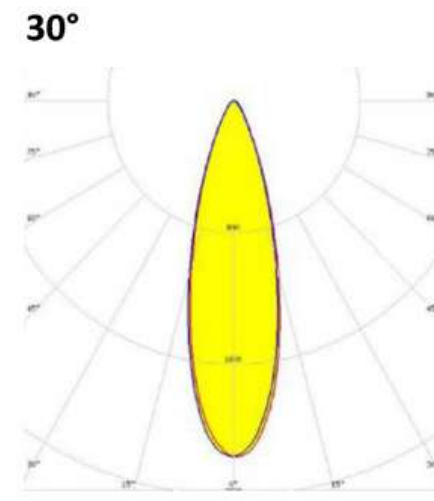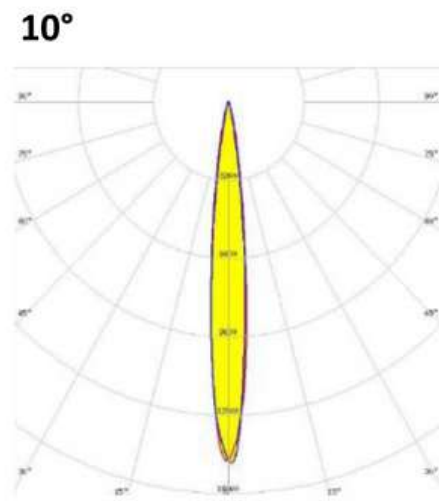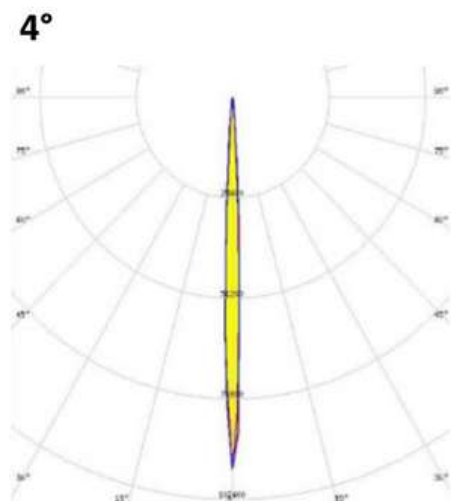

## ALXSYS LUKE




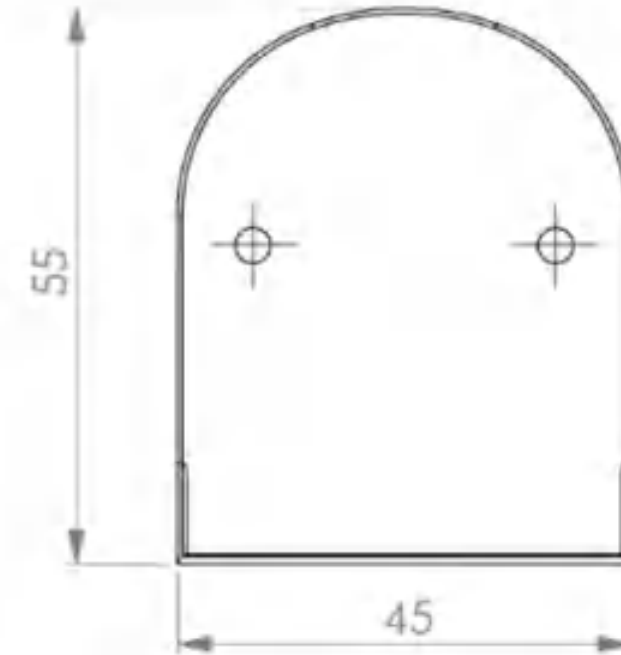

MODEL /SIZE	LUKE-600	LUKE-1200
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	20W	40W
CCT	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K
CRI	80+	80+
VOLTAGE	180-265 VAC	180-265 VAC
BEAM ANGLE	120°	120°
LUMEN OUTPUT	2240LM	4480LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	W/H/L: 55/45/600	W/H/L: 55/45/1200
HOUSING	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	44	44



### GAMMA ANGLES:

120°

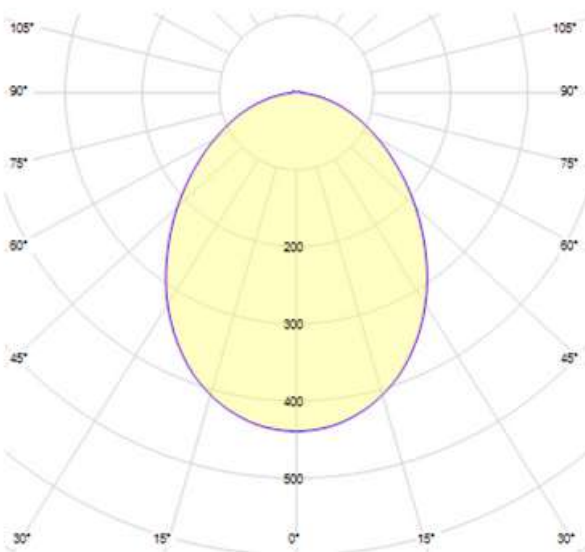

## ALXSYS MISRA




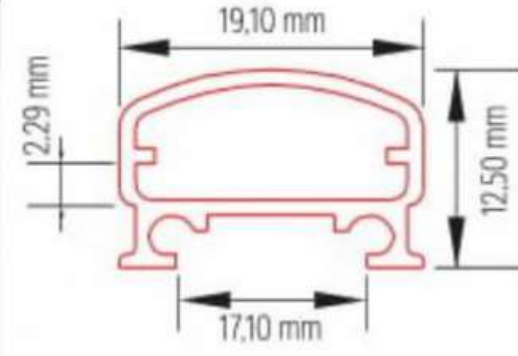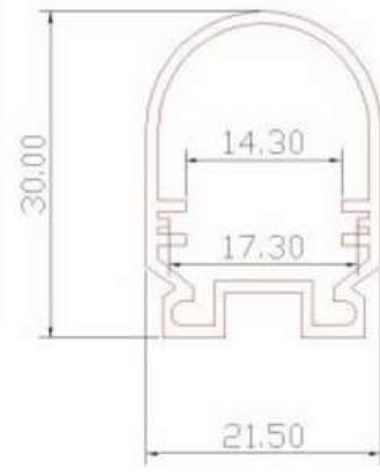


MODEL /SIZE	MISRA-BP	MISRA-KP
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	5W/MT – 12W/MT (OPT.)	5W/MT – 12W/MT (OPT.)
CCT	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K
CRI	80+	80+
VOLTAGE	24VDC / EXTERNAL DRIVER	24VDC / EXTERNAL DRIVER
BEAM ANGLE	120°	120°
LUMEN OUTPUT	650LM/MT – 1440LM/MT	650LM/MT – 1440LM/MT
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	W/H: 21,5/30	W/H: 17,10/12,5
HOUSING	POLYCARBONATE/ PMMA	POLYCARBONATE/ PMMA
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	67	67

### GAMMA ANGLES:

120° /BP

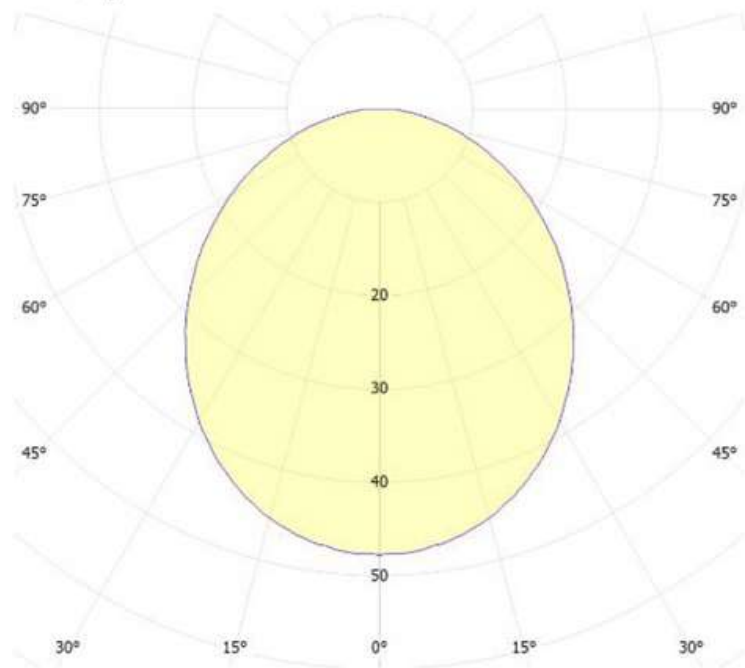

120° /KP

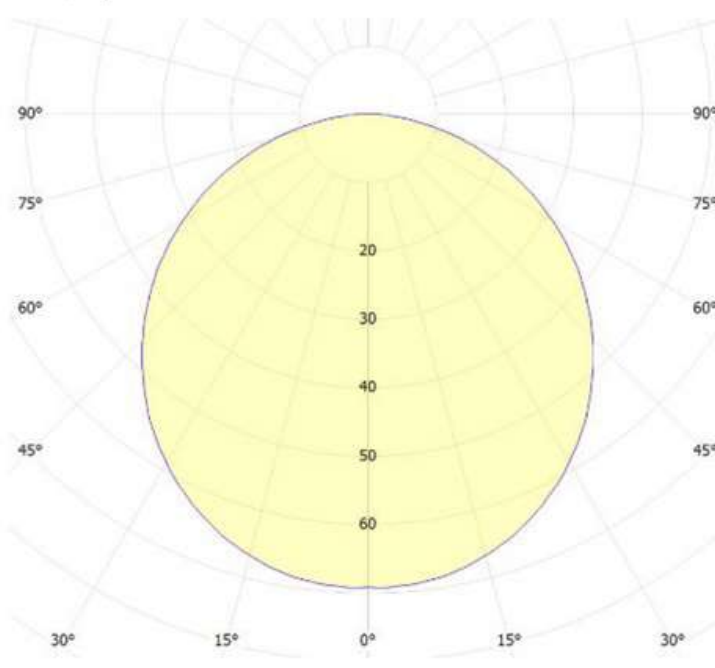

## ALXSYS MODI






# ASYS LIGHT

## ALXSYS MODI DATASHEET



<b>MODEL /SIZE</b>	<b>MODI-3</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR / EXTERIOR
<b>LED</b>	SAMSUNG
<b>POWER</b>	1,08W
<b>CCT</b>	2700K-3000K-4000K-6500K-10000K-R-G-B
<b>CRI</b>	80+
<b>VOLTAGE</b>	12VDC
<b>BEAM ANGLE</b>	160°
<b>LUMEN OUTPUT</b>	105LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-35C / +85C
<b>CONTROL</b>	ON-OFF
<b>DIMENSIONS (mm)</b>	W/H/L: 15/10,5/66
<b>HOUSING</b>	POLYCARBONATE
<b>CABLES</b>	COPPER WIRE
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	67

### GAMMA ANGLES:

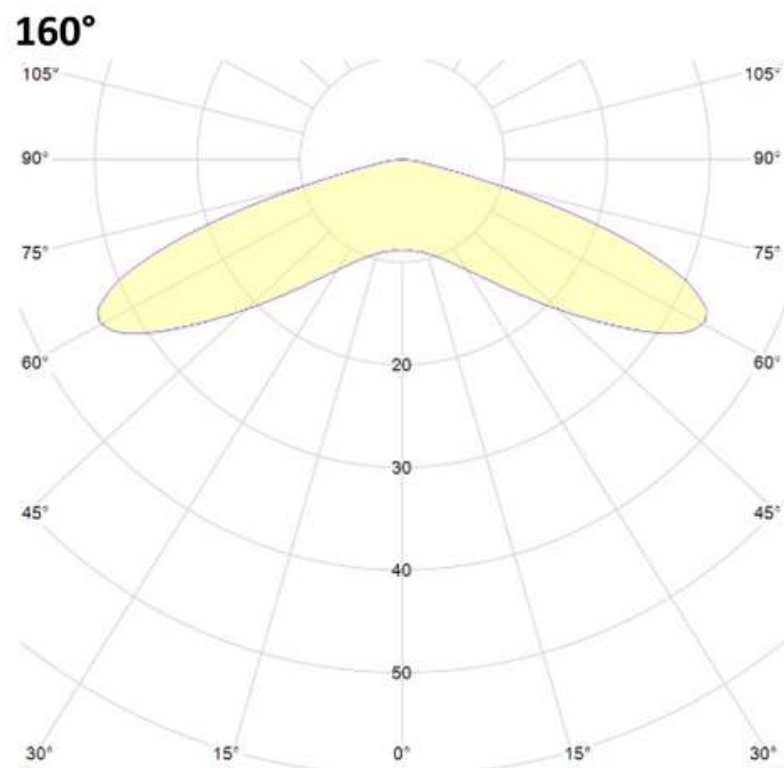

## ALXSYS NANO




EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)

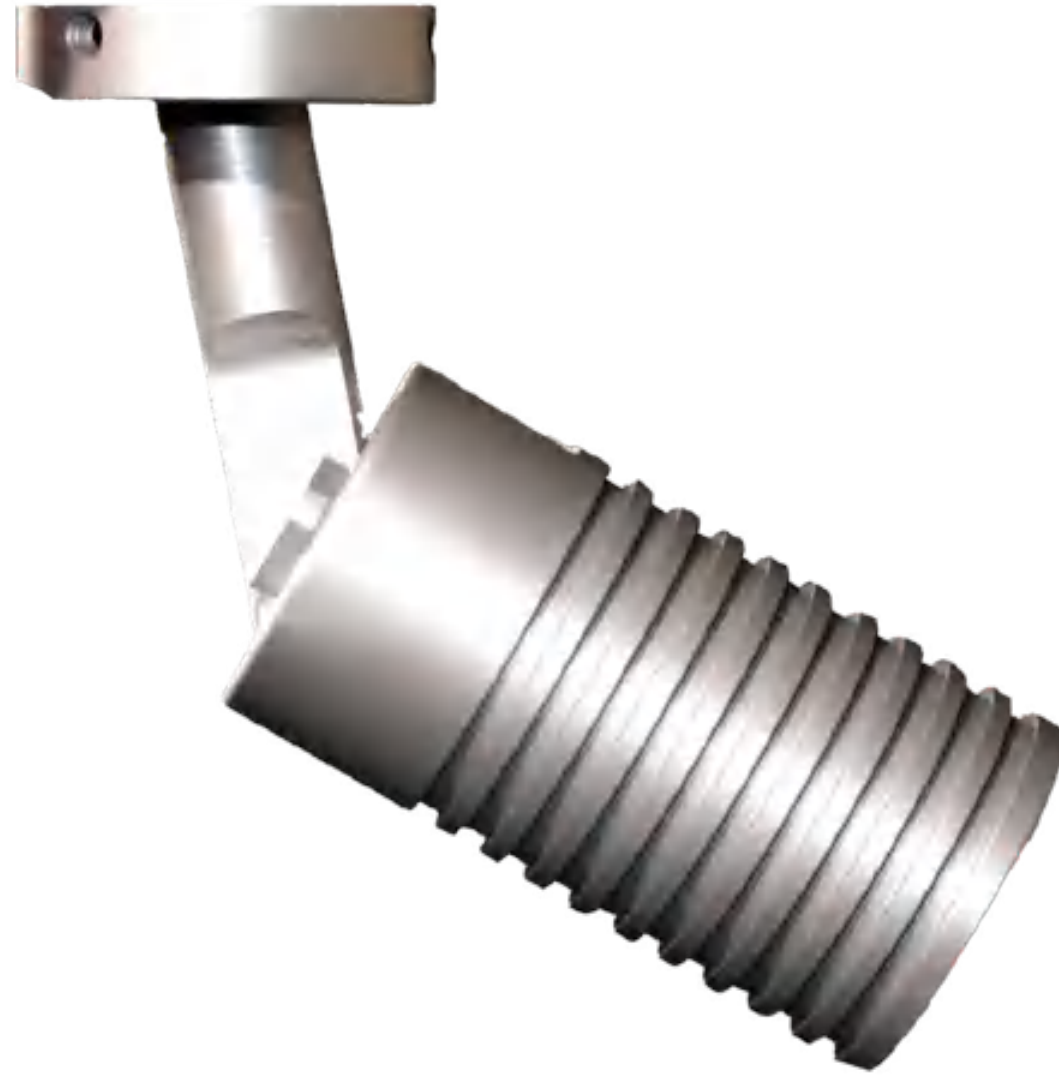

# ASYS LIGHT


## ALXSYS NANO DATASHEET

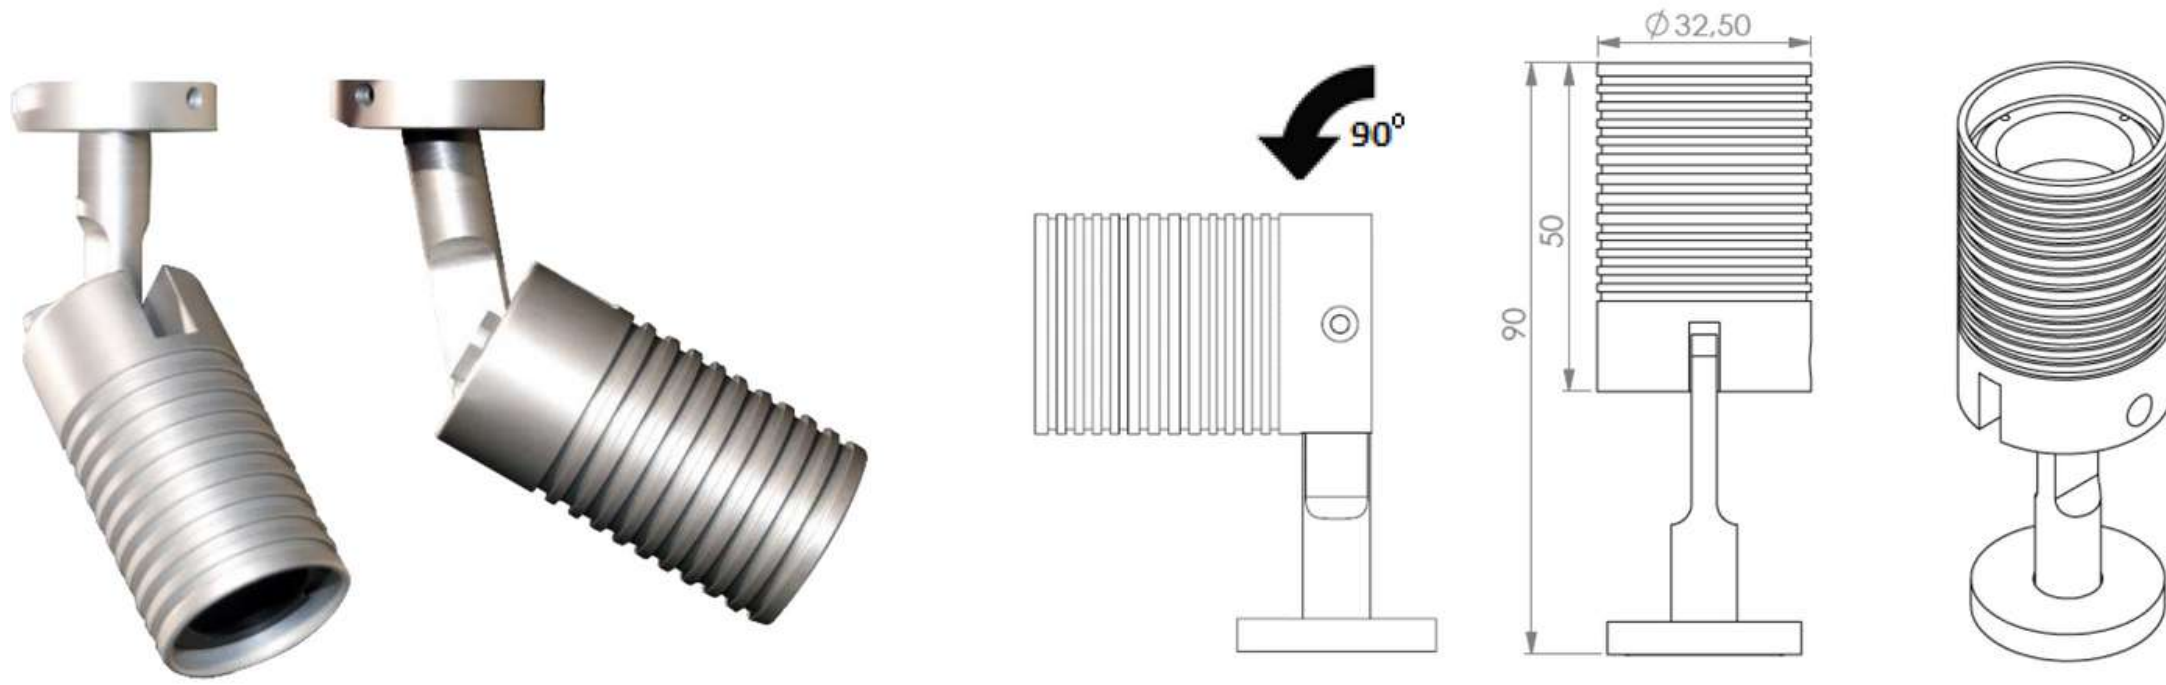


<b>MODEL /SIZE</b>	<b>NANO</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR / EXTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	3W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	19°, 35°, 20X40°
<b>LUMEN OUTPUT</b>	276LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF / DALI
<b>DIMENSIONS (mm)</b>	Q/H: 32,5/90
<b>HOUSING</b>	EXT ALU, TEMPERED GLASS
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	67

### GAMMA ANGLES:


19°

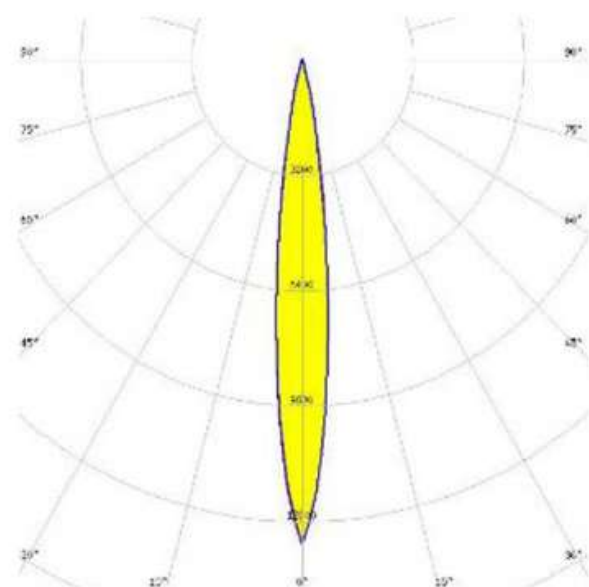

35°


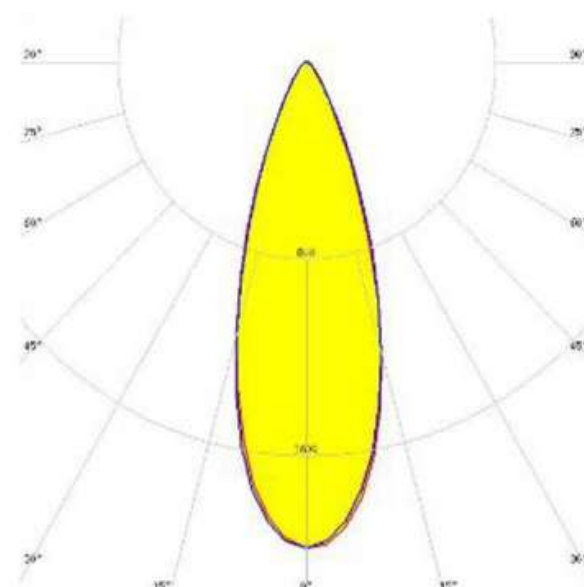


20X40°

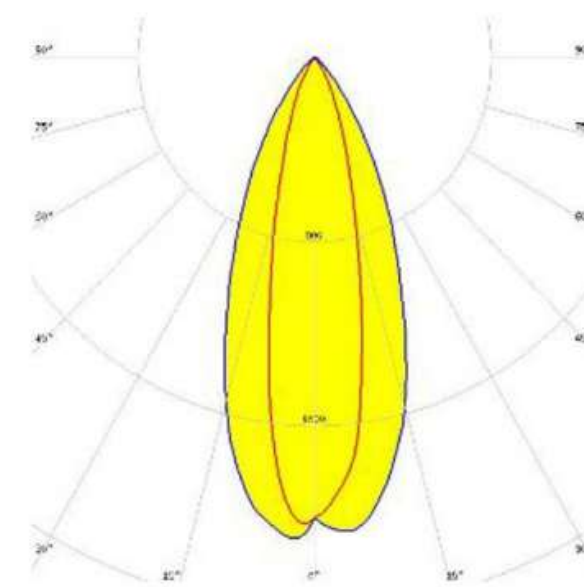

## ALXSYS PEGGY




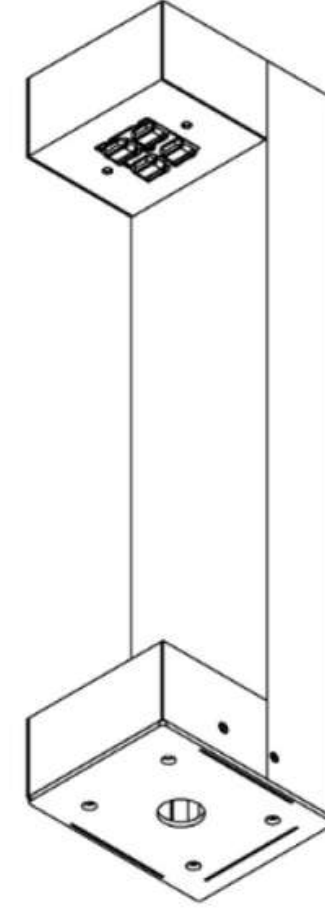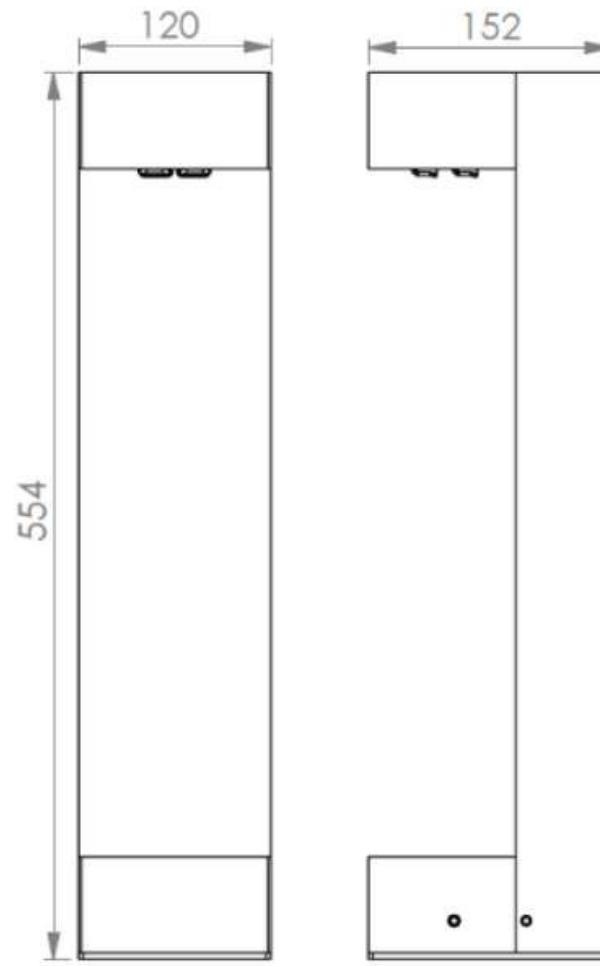

MODEL /SIZE	PEGGY
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER	10W
CCT	2700K-3000K-4000K-6500K
CRI	80+
VOLTAGE	180-265 VAC
BEAM ANGLE	ASYM
LUMEN OUTPUT	850LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF / DALI
DIMENSIONS (mm)	W/H/L: 120/152/554
HOUSING	EXT ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IP	65

### GAMMA ANGLES:


#### ASYM

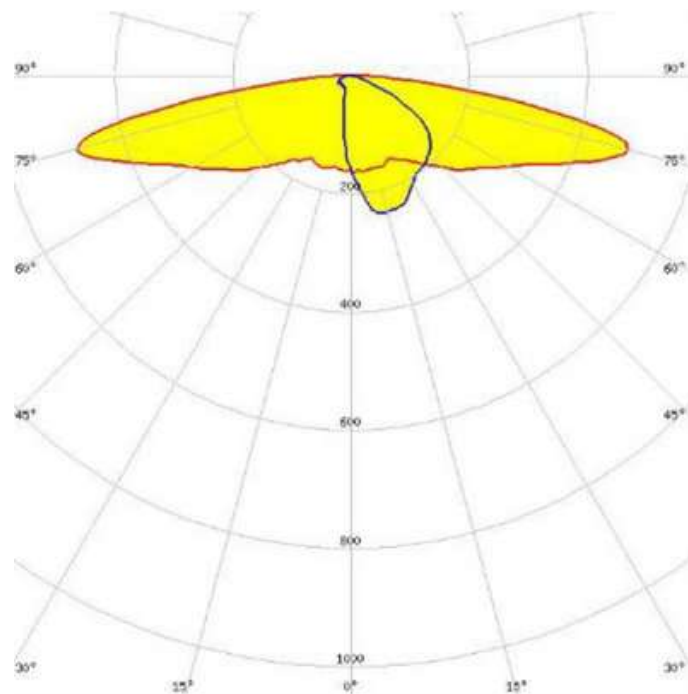

## ALXSYS ROSE



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

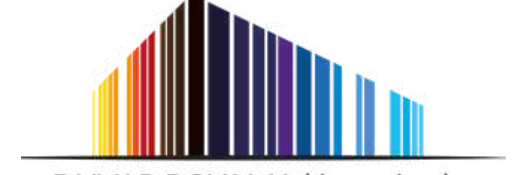

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




# ASYS LIGHT

## ALXSYS ROSE DATASHEET

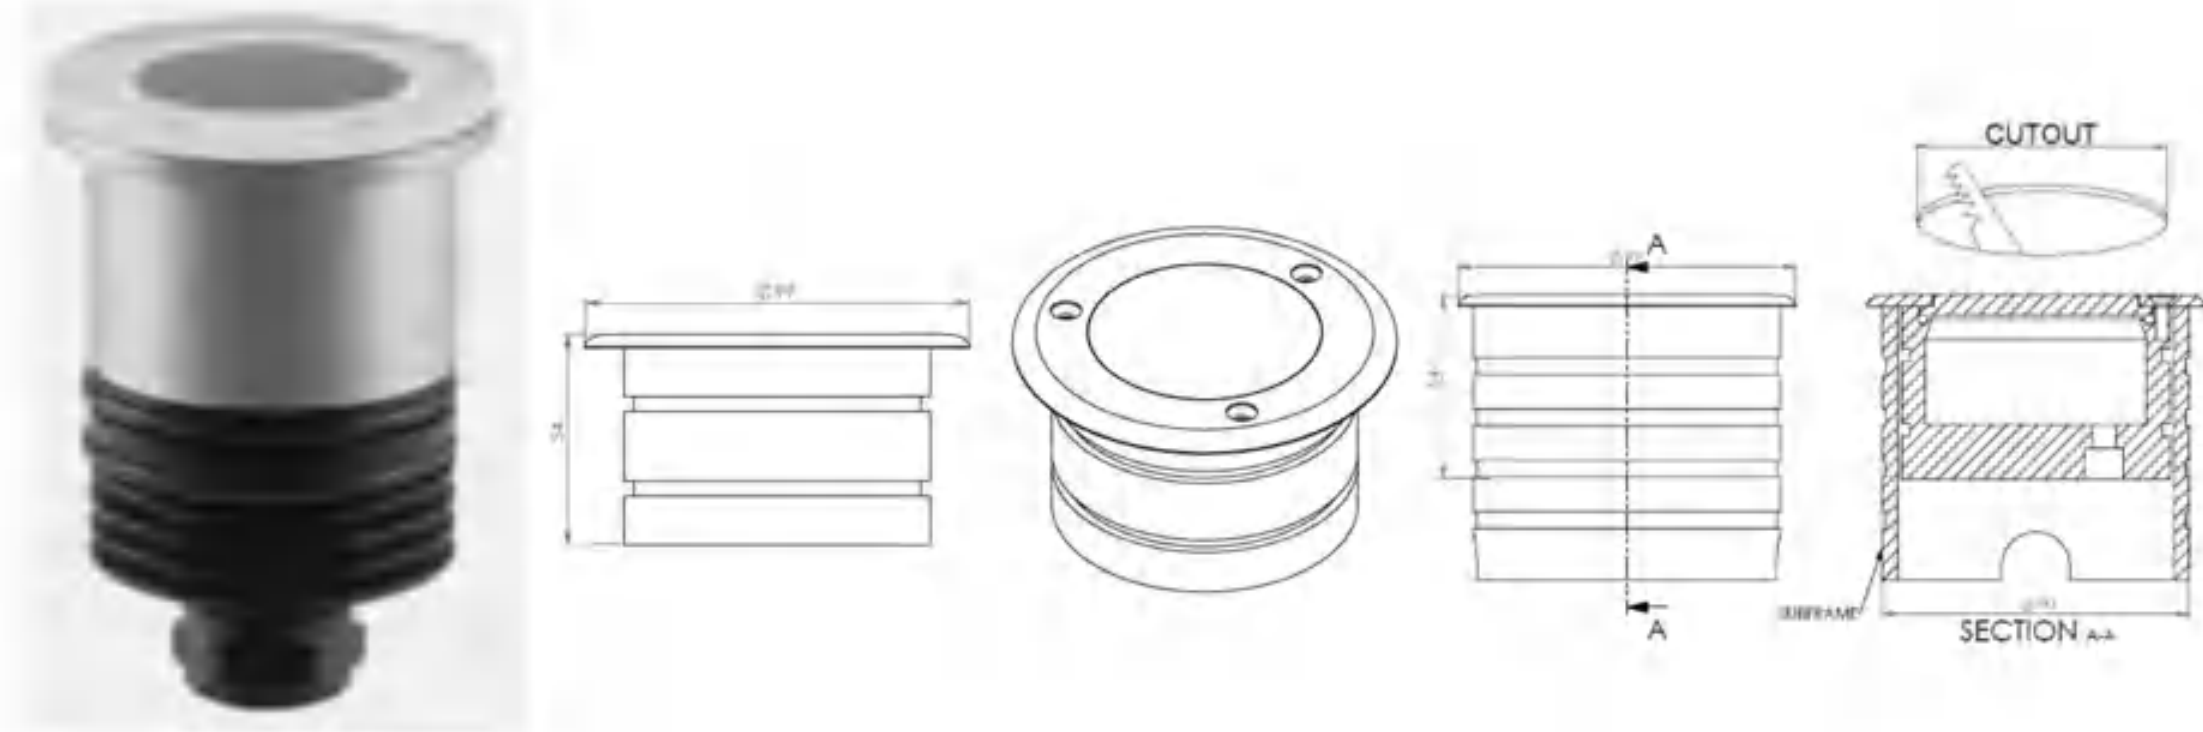

<b>MODEL /SIZE</b>	<b>ROSE</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR/EXTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	2W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC /EXTERNAL DRIVER
<b>BEAM ANGLE</b>	85°
<b>LUMEN OUTPUT</b>	295LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF / DALI
<b>DIMENSIONS (mm)</b>	Q/H: 99/54
<b>PANEL CUT OUT (mm)</b>	Q:91
<b>HOUSING</b>	EXT. ALU, TEMPERED GLASS
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	67

### GAMMA ANGLES:

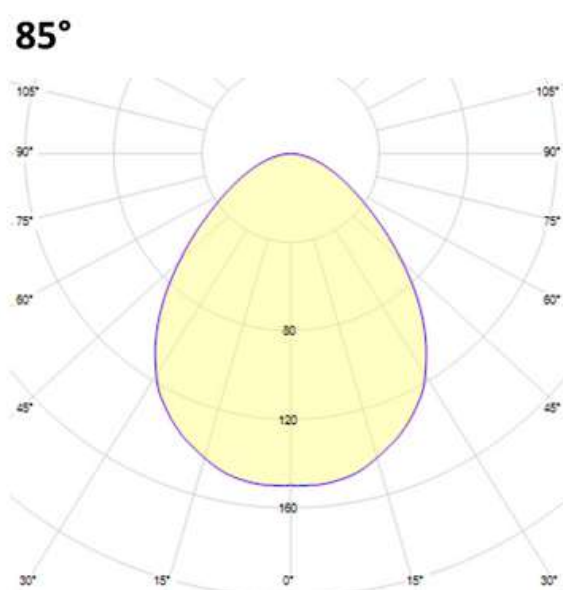

## ALXSYS STREET




SOKAK AYDINLATMA (dış mekan)  
STREET LIGHTING (outdoor)





# ASYS LIGHT


## ALXSYS STREET DATASHEET

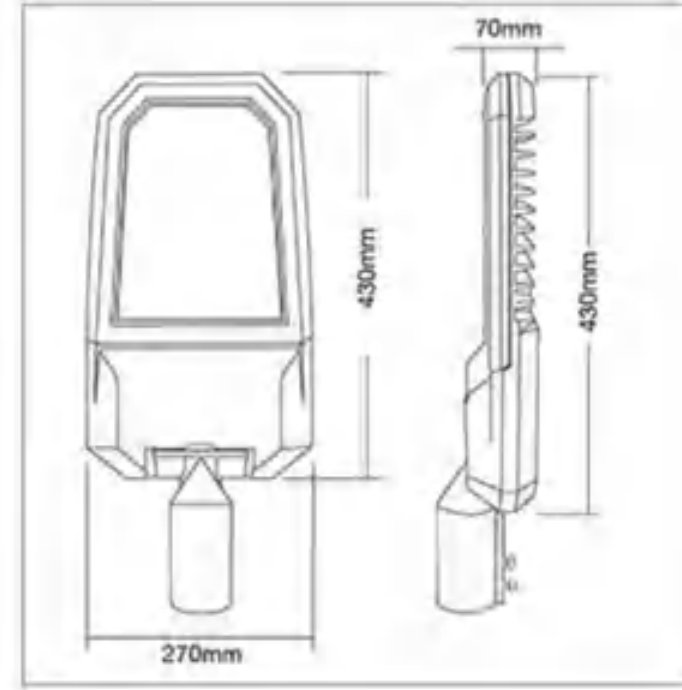

MODEL /SIZE	STREET-60	STREET-100
INTERIOR/EXTERIOR	EXTERIOR	EXTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	60W	100W
CCT	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K
CRI	80+	80+
VOLTAGE	180-265 VAC	180-265 VAC
BEAM ANGLE	ASYM	ASYM
LUMEN OUTPUT	6000LM	10000LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	W/H/L: 70/430/270	W/H/L: 70/430/270
HOUSING	DIE ALU, TEMPERED GLASS	DIE ALU, TEMPERED GLASS
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	67	67

### GAMMA ANGLES:


#### ASYM

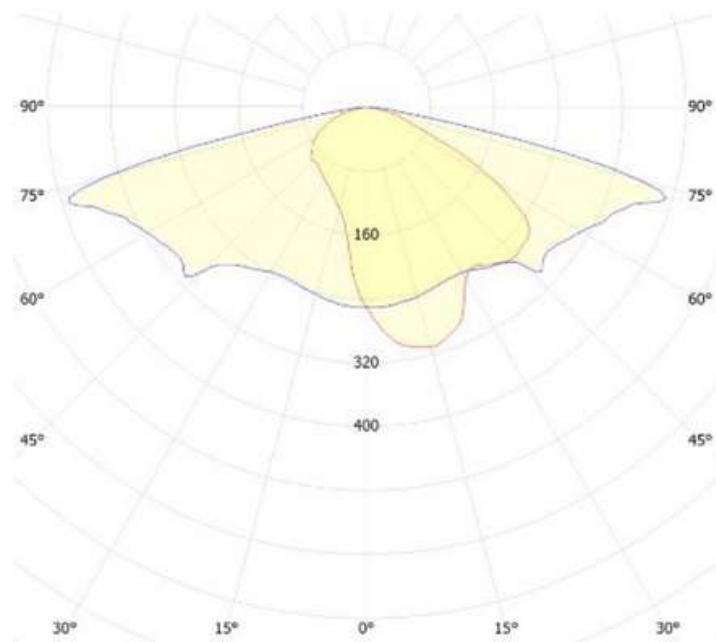

## ALXSYS TALİ



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

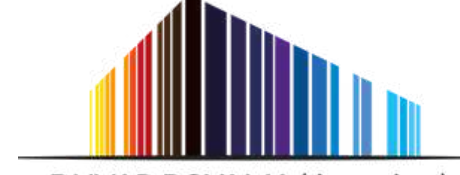

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




# ASYS LIGHT

## ALXSYS TALI DATASHEET

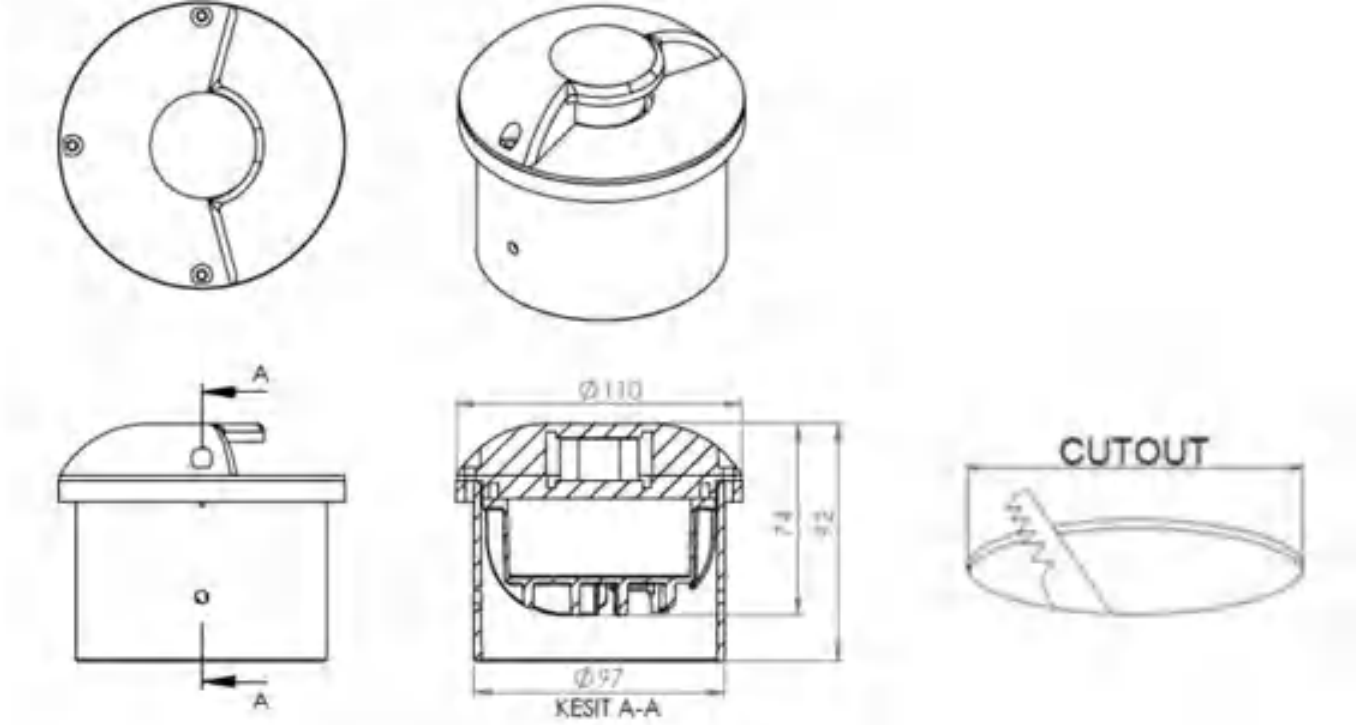

MODEL /SIZE	TALI
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER	7W
CCT	2700K-3000K-4000K
CRI	80+
VOLTAGE	180-265 VAC
BEAM ANGLE	135°
LUMEN OUTPUT	180LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF
DIMENSIONS (mm)	Q/H: 110/74
PANEL CUT OUT (mm)	Q: 98
HOUSING	DIE ALU, PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IP	67

### GAMMA ANGLES:

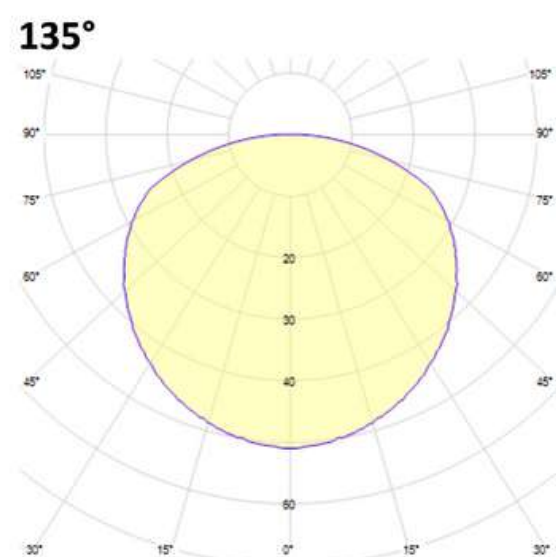

## ALXSYS TERRA




MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)



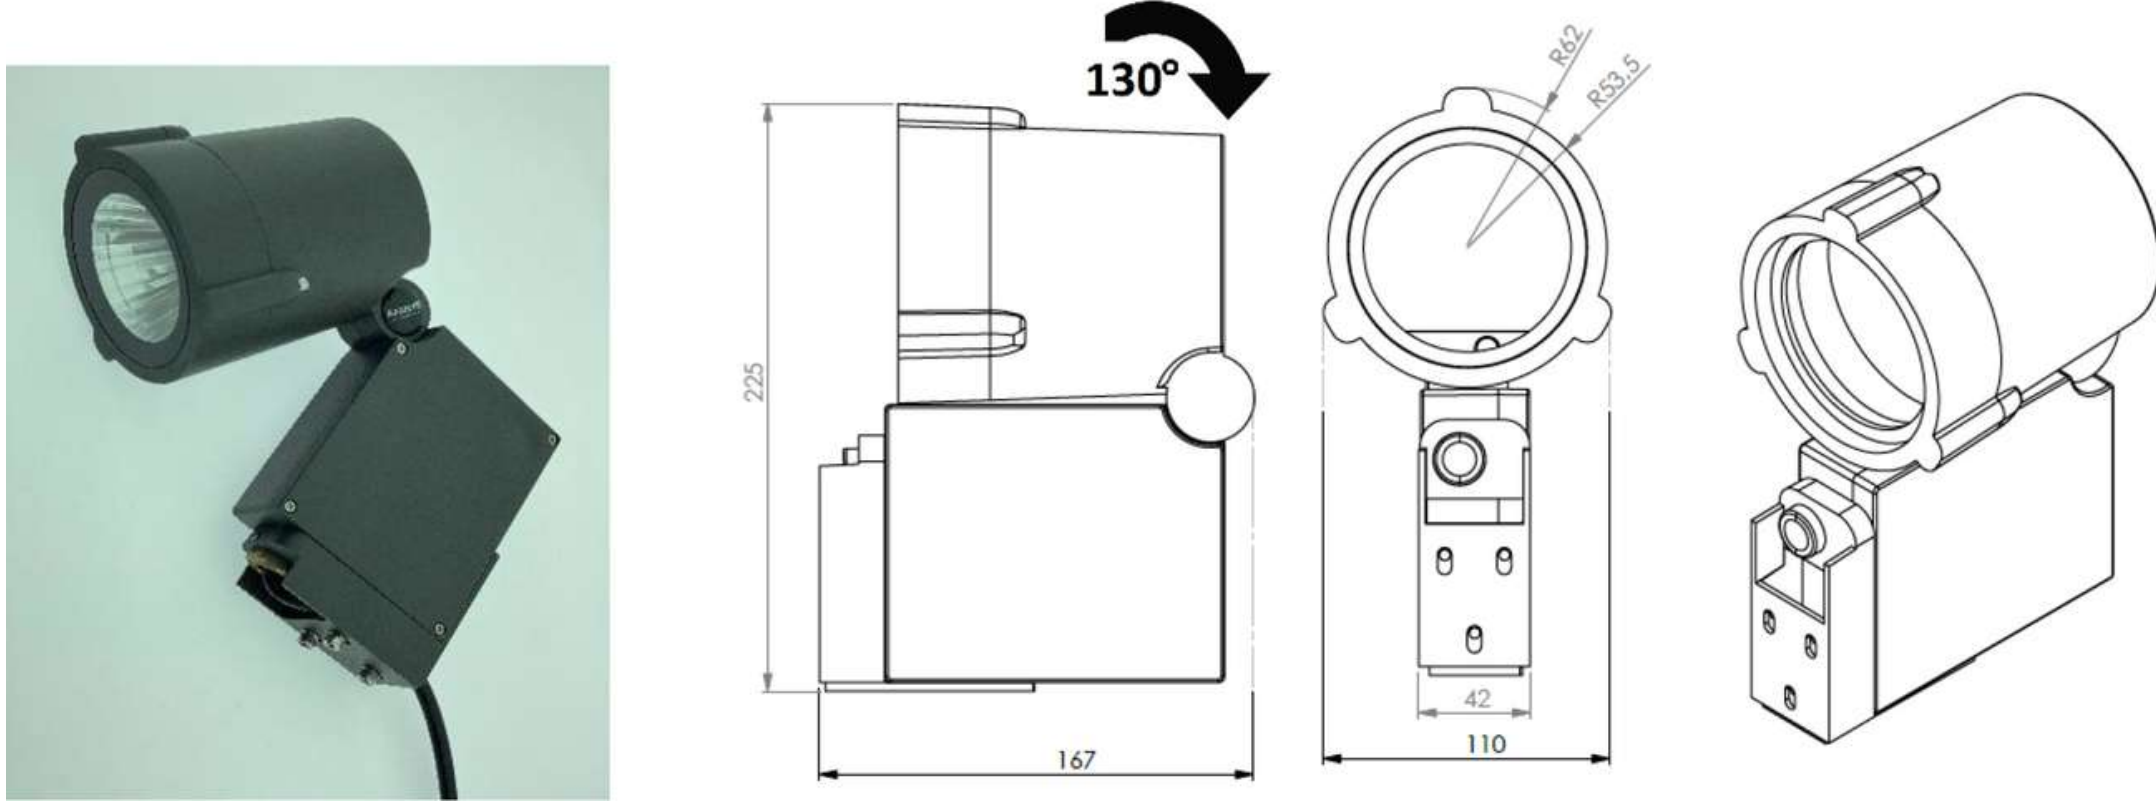

MODEL /SIZE	TERRA-20W	TERRA-30W
INTERIOR/EXTERIOR	INTERIOR / EXTERIOR	INTERIOR / EXTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	20W	30W
CCT	2700K-3000K-4000K	2700K-3000K-4000K
CRI	80+	80+
VOLTAGE	180-265VAC	180-265VAC
BEAM ANGLE	17° - 30° - 50°	17° - 30° - 50°
LUMEN OUTPUT	1840LM	2700LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	Q/W/H/L: 107/110/225/167	Q/W/H/L: 107/110/225/167
HOUSING	DIE ALU, TEMPERED GLASS	DIE ALU, TEMPERED GLASS
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	67	67


### GAMMA ANGLES:

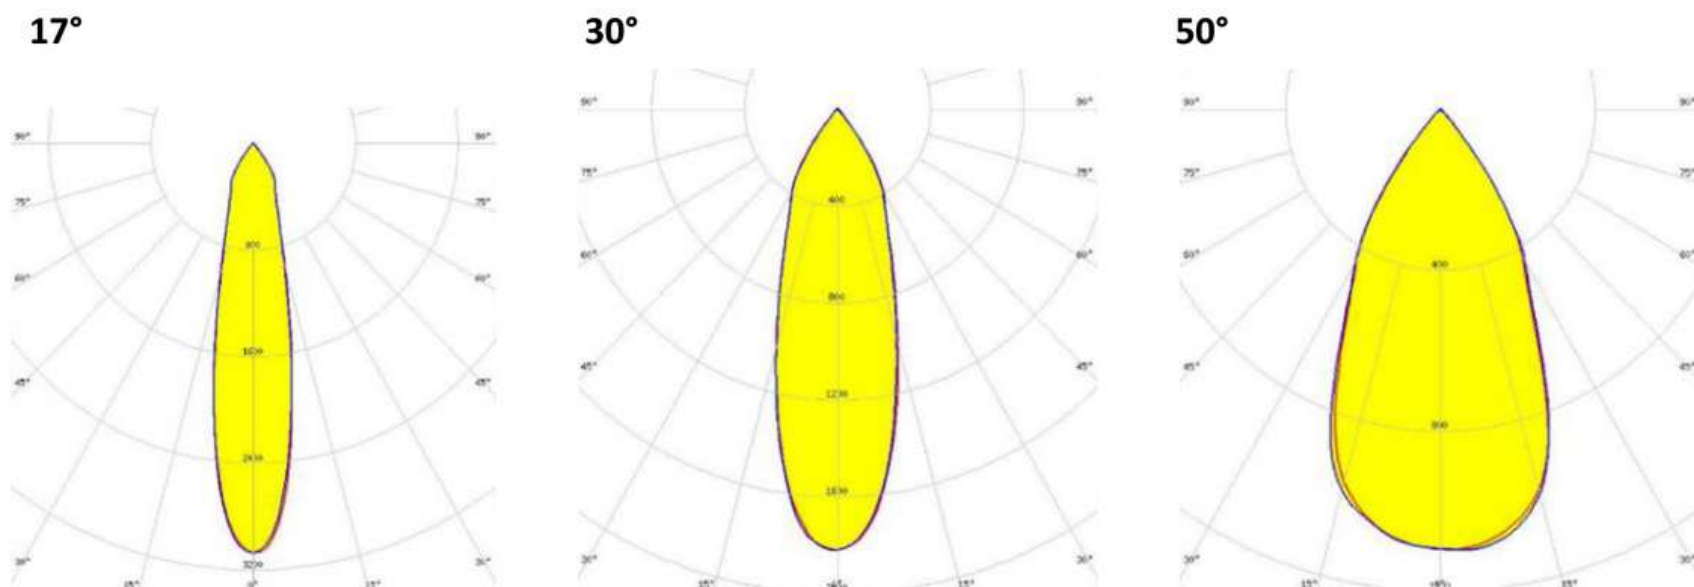

## ALXSYS TONOZ




EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING





MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING

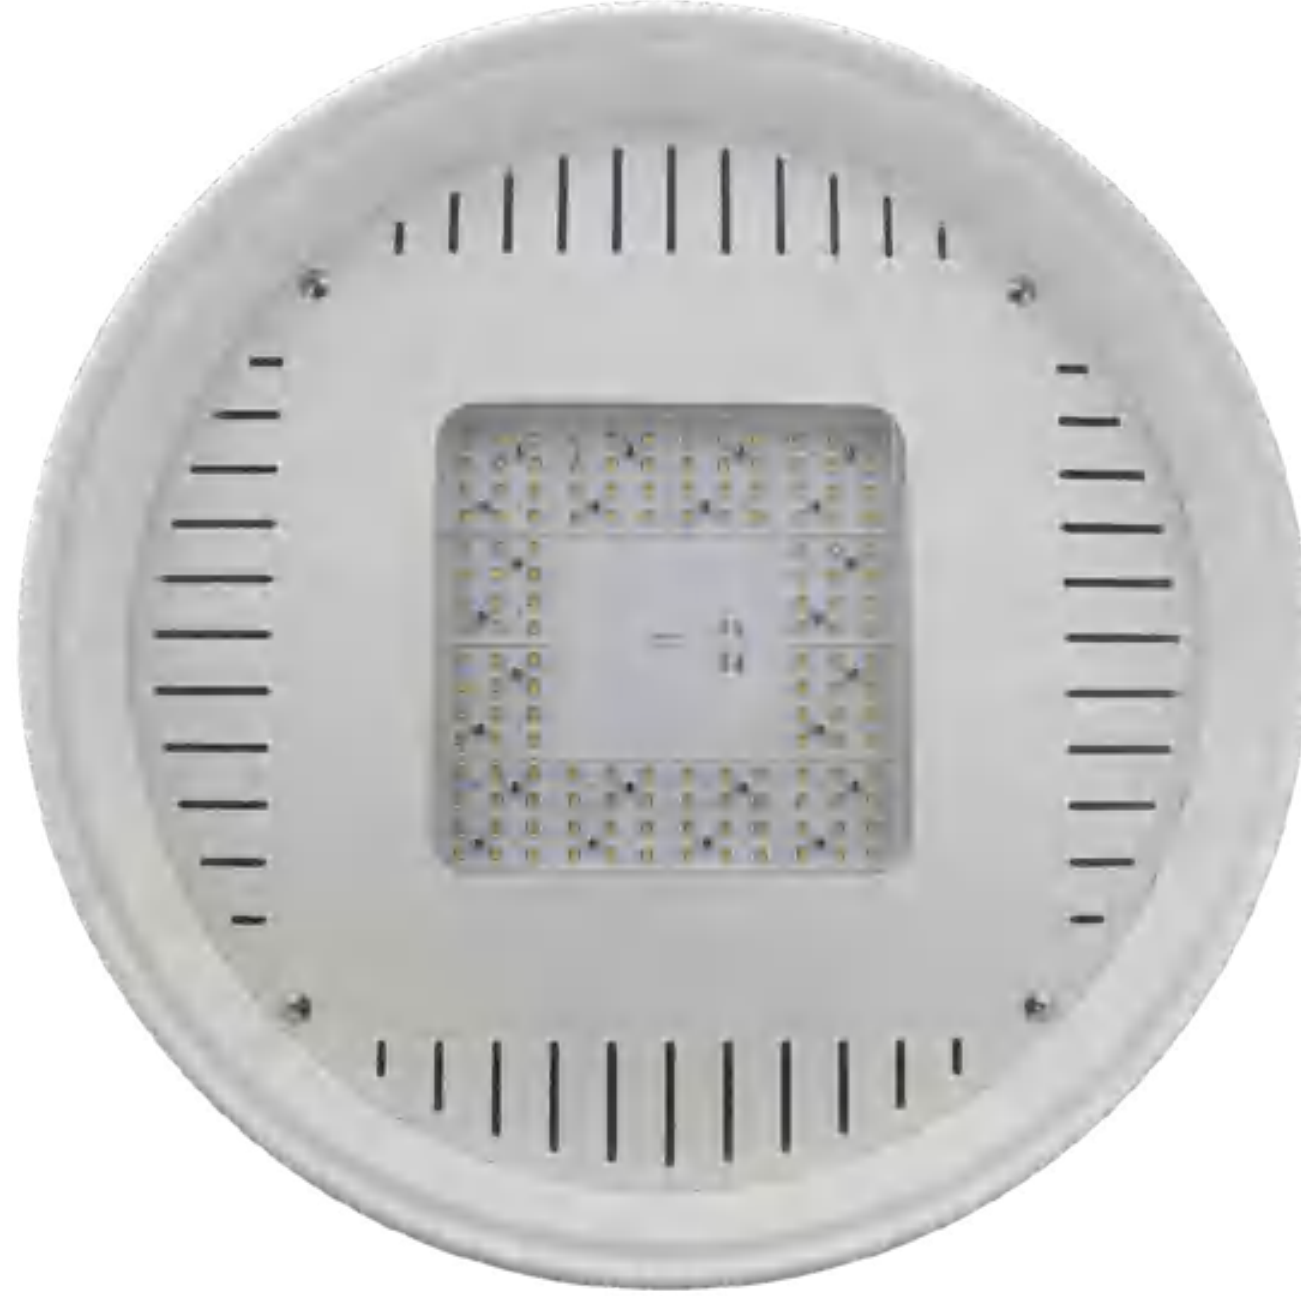



# asys LIGHT

## ALXSYS TONOZ DATASHEET

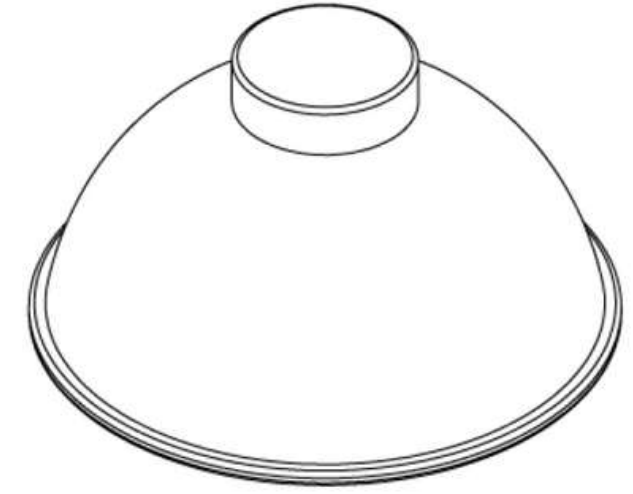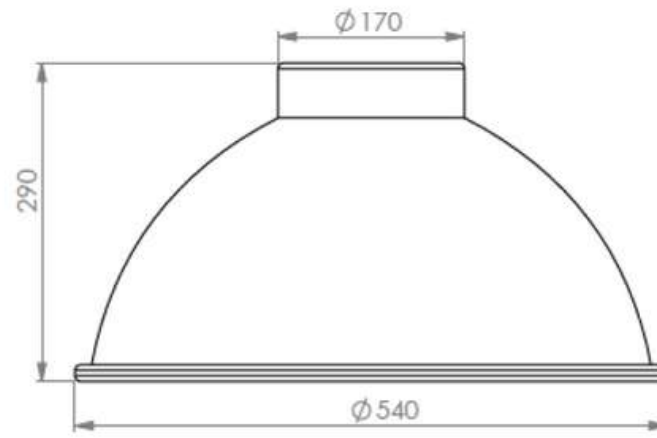

MODEL /SIZE	TONOZ-75	TONOZ-100
INTERIOR/EXTERIOR	EXTERIOR	EXTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	75W	100W
CCT	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K
CRI	80+	80+
VOLTAGE	180-265 VAC	180-265 VAC
BEAM ANGLE	60° ,90°	60° ,90°
LUMEN OUTPUT	9000LM	11500LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF	ON-OFF
DIMENSIONS (mm)	W/H/L: 94/100/591	W/H/L: 94/100/591
HOUSING	PLASTING ALU, TEMPERED GLASS	PLASTING ALU, TEMPERED GLASS
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	67	67

### GAMMA ANGLES:

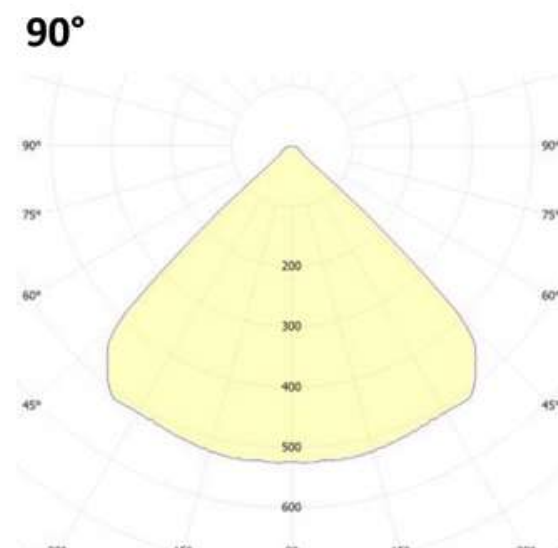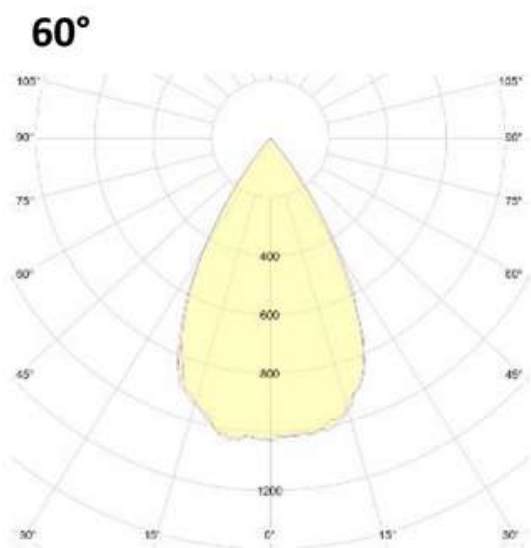

## ALXSYS YUSSI3



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)






# ASYS LIGHT

## ALXSYS YUSSI3 DATASHEET

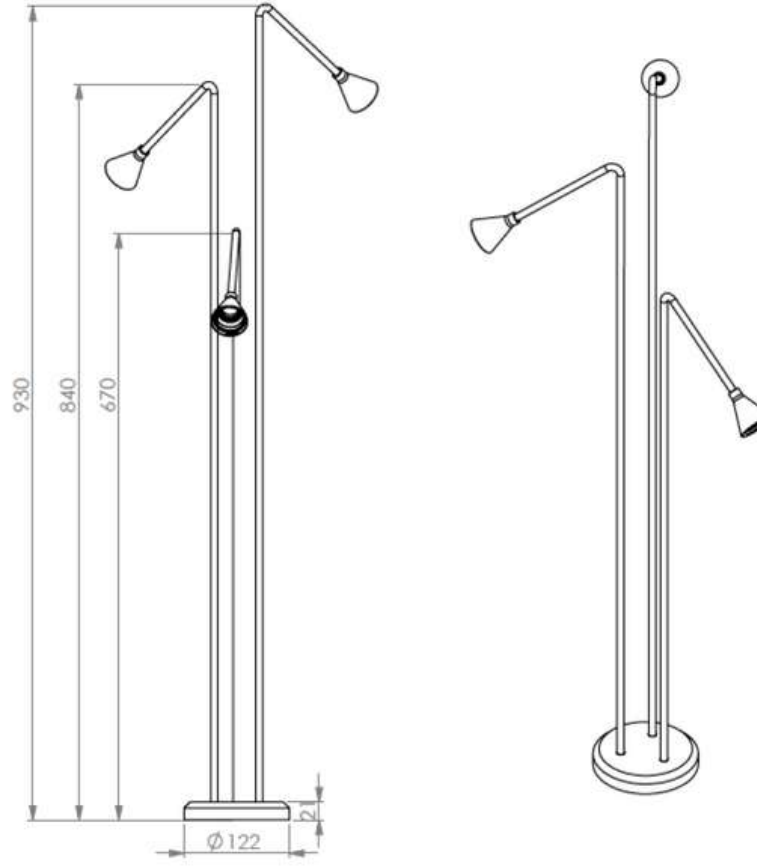

<b>MODEL /SIZE</b>	<b>YUSSI 3</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR / EXTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	6W
<b>CCT</b>	2700K-3000K-4000K-5000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	12-48VDC
<b>BEAM ANGLE</b>	90°
<b>LUMEN OUTPUT</b>	550LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF
<b>DIMENSIONS (mm)</b>	Q/L: 122/ 670-840-930
<b>HOUSING</b>	EXT ALU, DIE ALU, PMMA, ABS
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	65

### **GAMMA ANGLES:** 3x90°

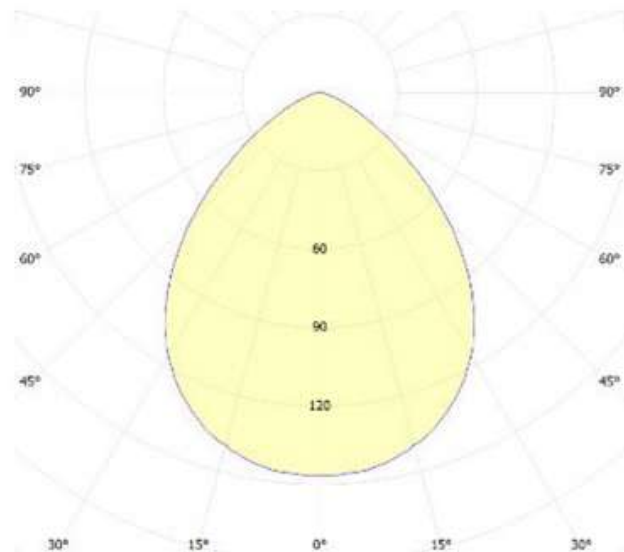

## ALXSYS BORAK



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




# ASYS LIGHT

## ALXSYS BORAK DATASHEET

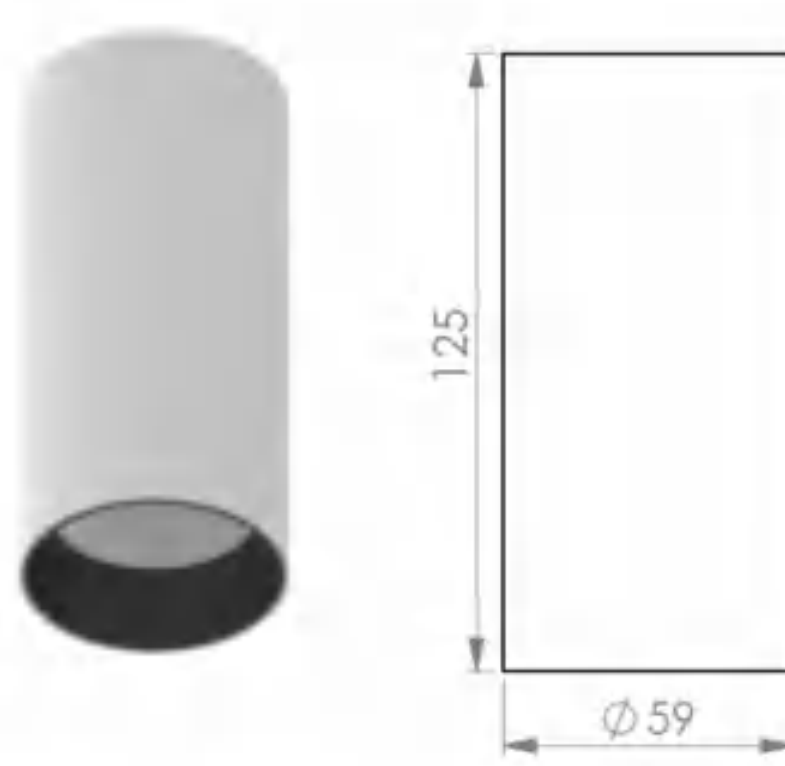

<b>MODEL /SIZE</b>	<b>BORAK</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	12W
<b>CCT</b>	2700K-3000K-4000K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	10° - 25° - 40°
<b>LUMEN OUTPUT</b>	931LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF / DALI
<b>DIMENSIONS (mm)</b>	Q/H: 59/125
<b>HOUSING</b>	EXT. ALU, UV STABILIZED PMMA
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5YEARS
<b>IP</b>	20


### GAMMA ANGLES:

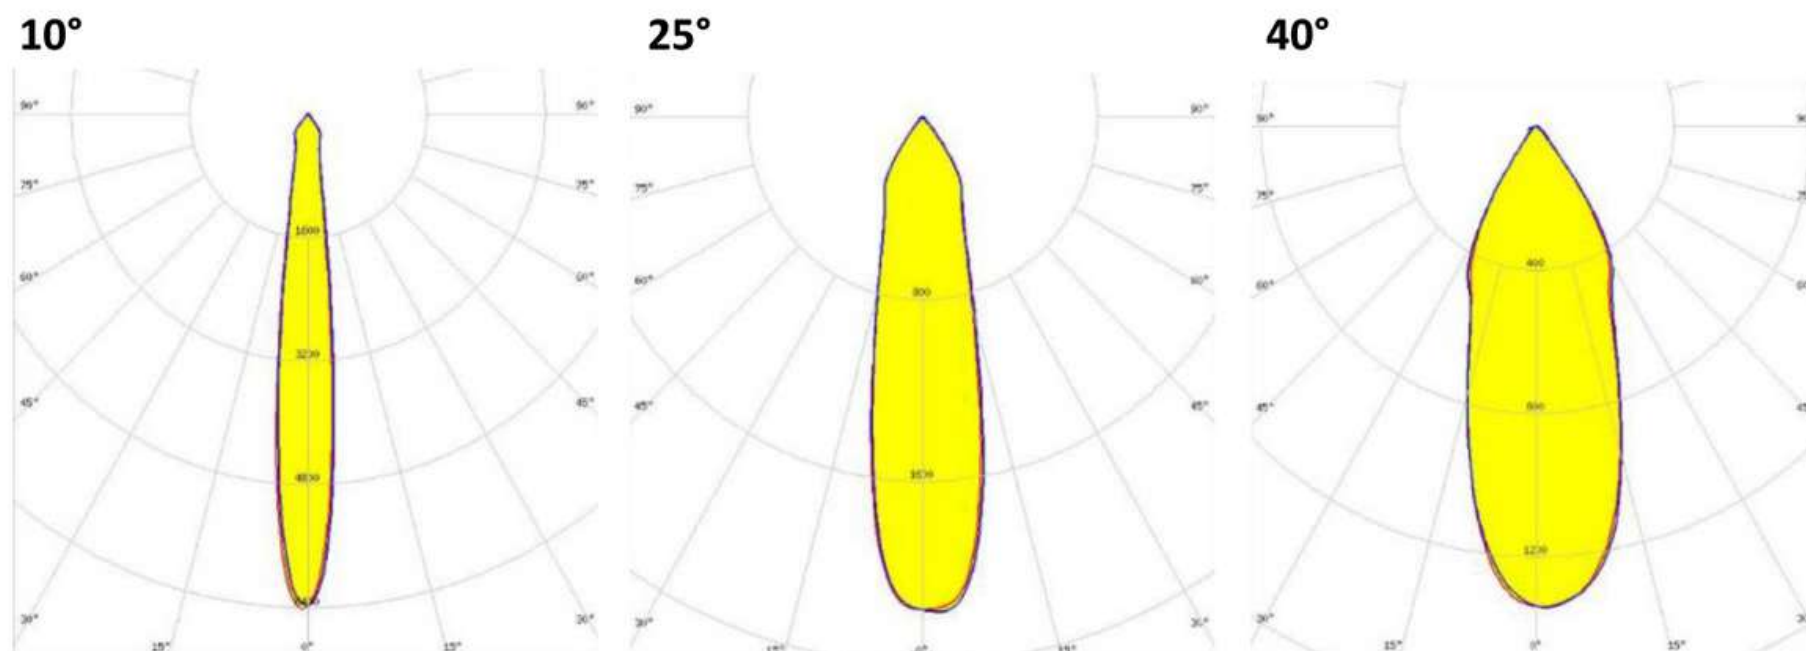

## ALXSYS COMET



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

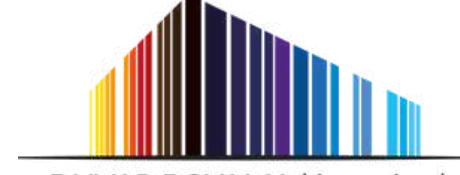

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




# asys LIGHT

## ALXSYS COMET DATASHEET

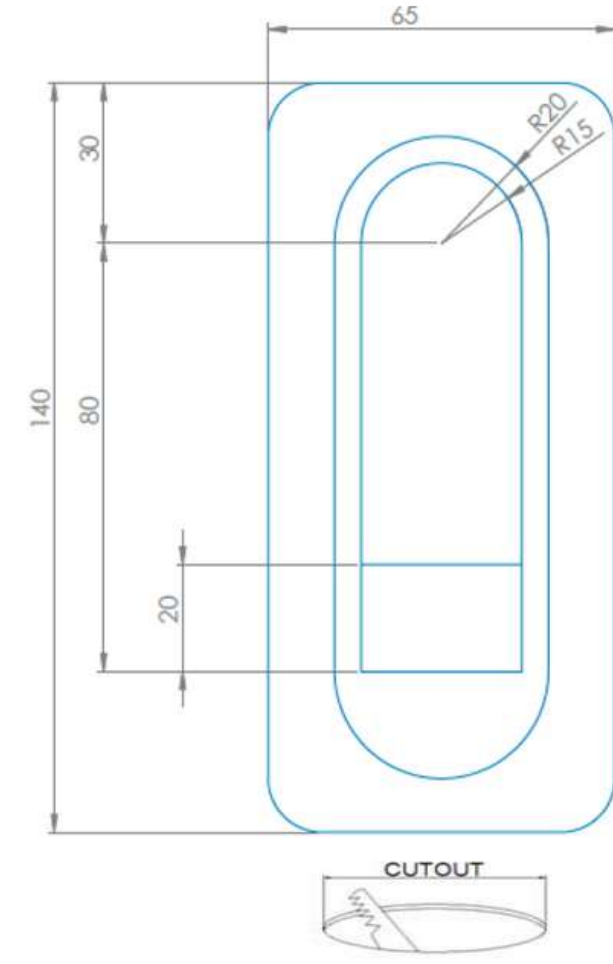

<b>MODEL /SIZE</b>	<b>COMET</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	3 W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	15°
<b>LUMEN OUTPUT</b>	240 LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF
<b>DIMENSIONS (mm)</b>	W/H/L: 65/140/25
<b>PANEL CUT OUT (mm)</b>	W/H: 50x120
<b>HOUSING</b>	DIE ALU, EXT ALU
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	IP20

### GAMMA ANGLES:

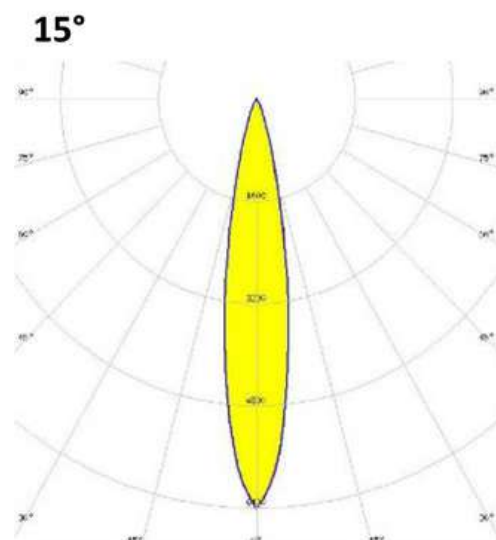

## ALXSYS DAMLA



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)



# ASYS LIGHT


## ALXSYS DAMLA DATASHEET

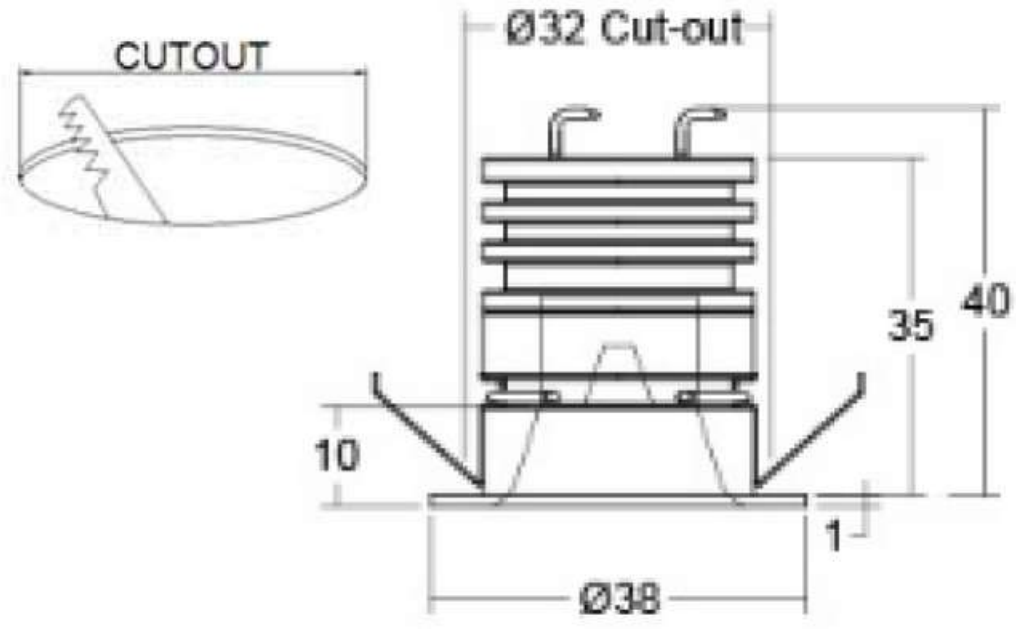

<b>MODEL /SIZE</b>	<b>DAMLA</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	2W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	30°
<b>LUMEN OUTPUT</b>	195LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF / DALI
<b>DIMENSIONS (mm)</b>	Q/H/: 38/40
<b>PANEL CUT OUT (mm)</b>	Q: 32
<b>HOUSING</b>	EXT. ALU
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	54

### GAMMA ANGLES:

30°

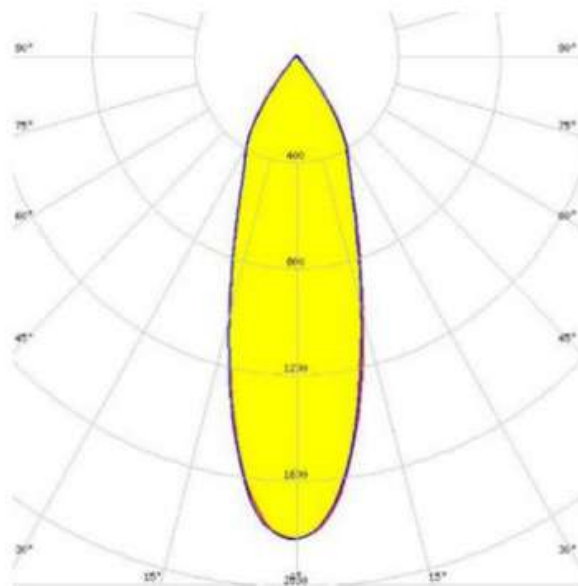

## ALXSYS DANILA



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING



DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)







# ASYS LIGHT

## ALXSYS DANILA DATASHEET

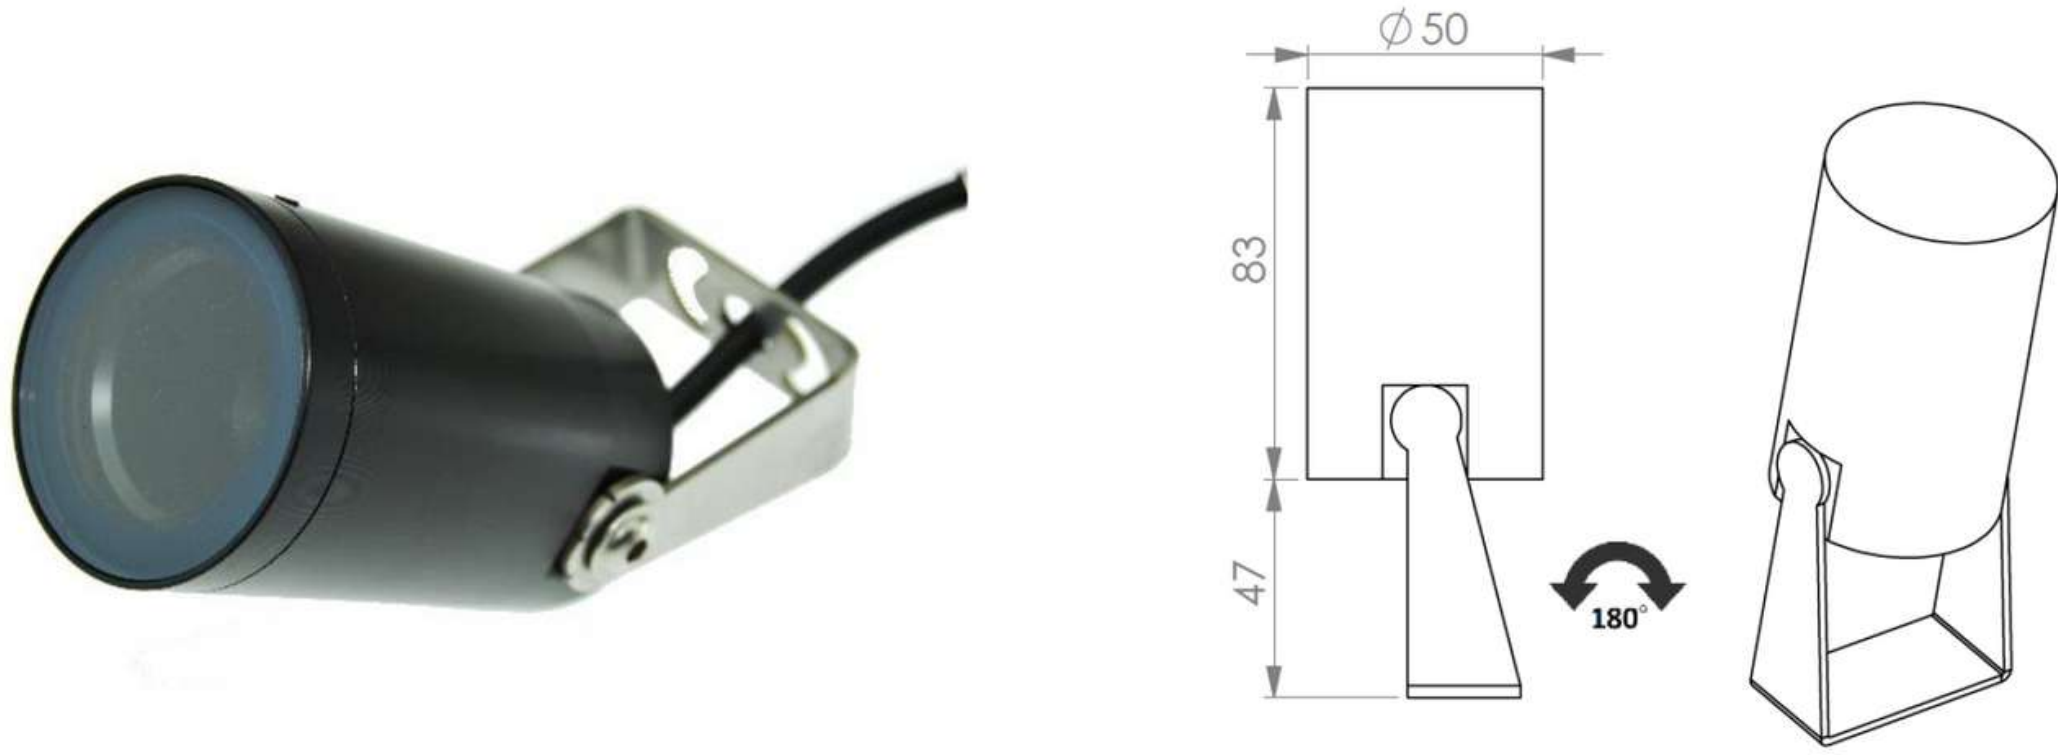

<b>MODEL /SIZE</b>	<b>DANILA</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	7W
<b>CCT</b>	2700K-3000K-4000K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	10° ↔ 60°
<b>LUMEN OUTPUT</b>	700LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF / DALI
<b>DIMENSIONS (mm)</b>	Q/H: 50/83
<b>HOUSING</b>	EXT. ALU, TEMPERED GLASS
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	54


### GAMMA ANGLES:

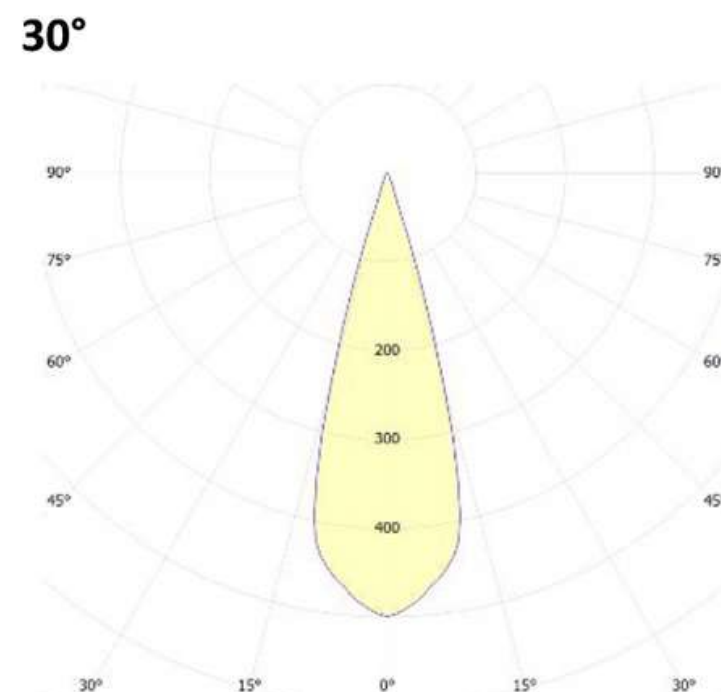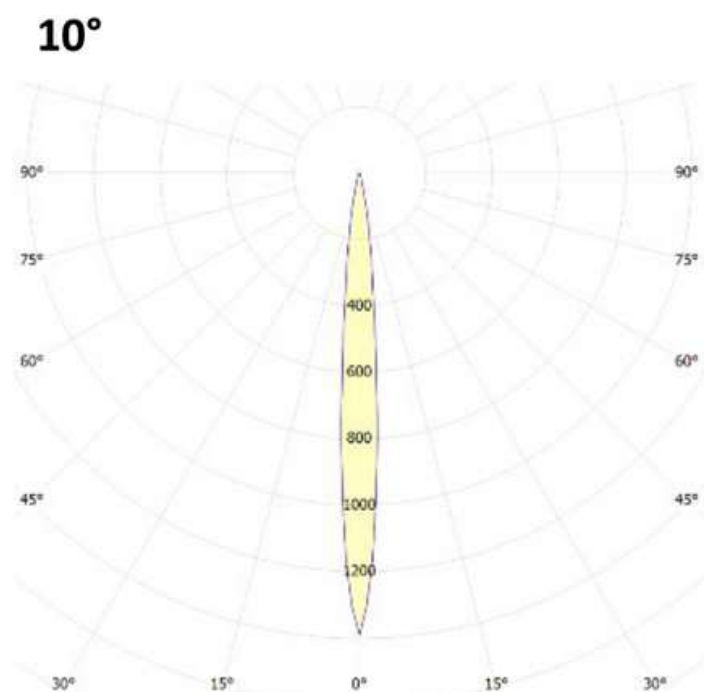

## ALXSYS DOLI



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

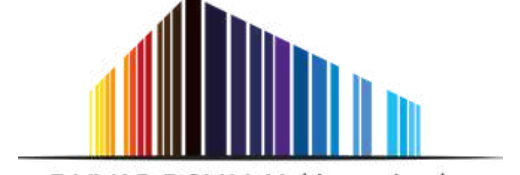

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)




EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING






DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)

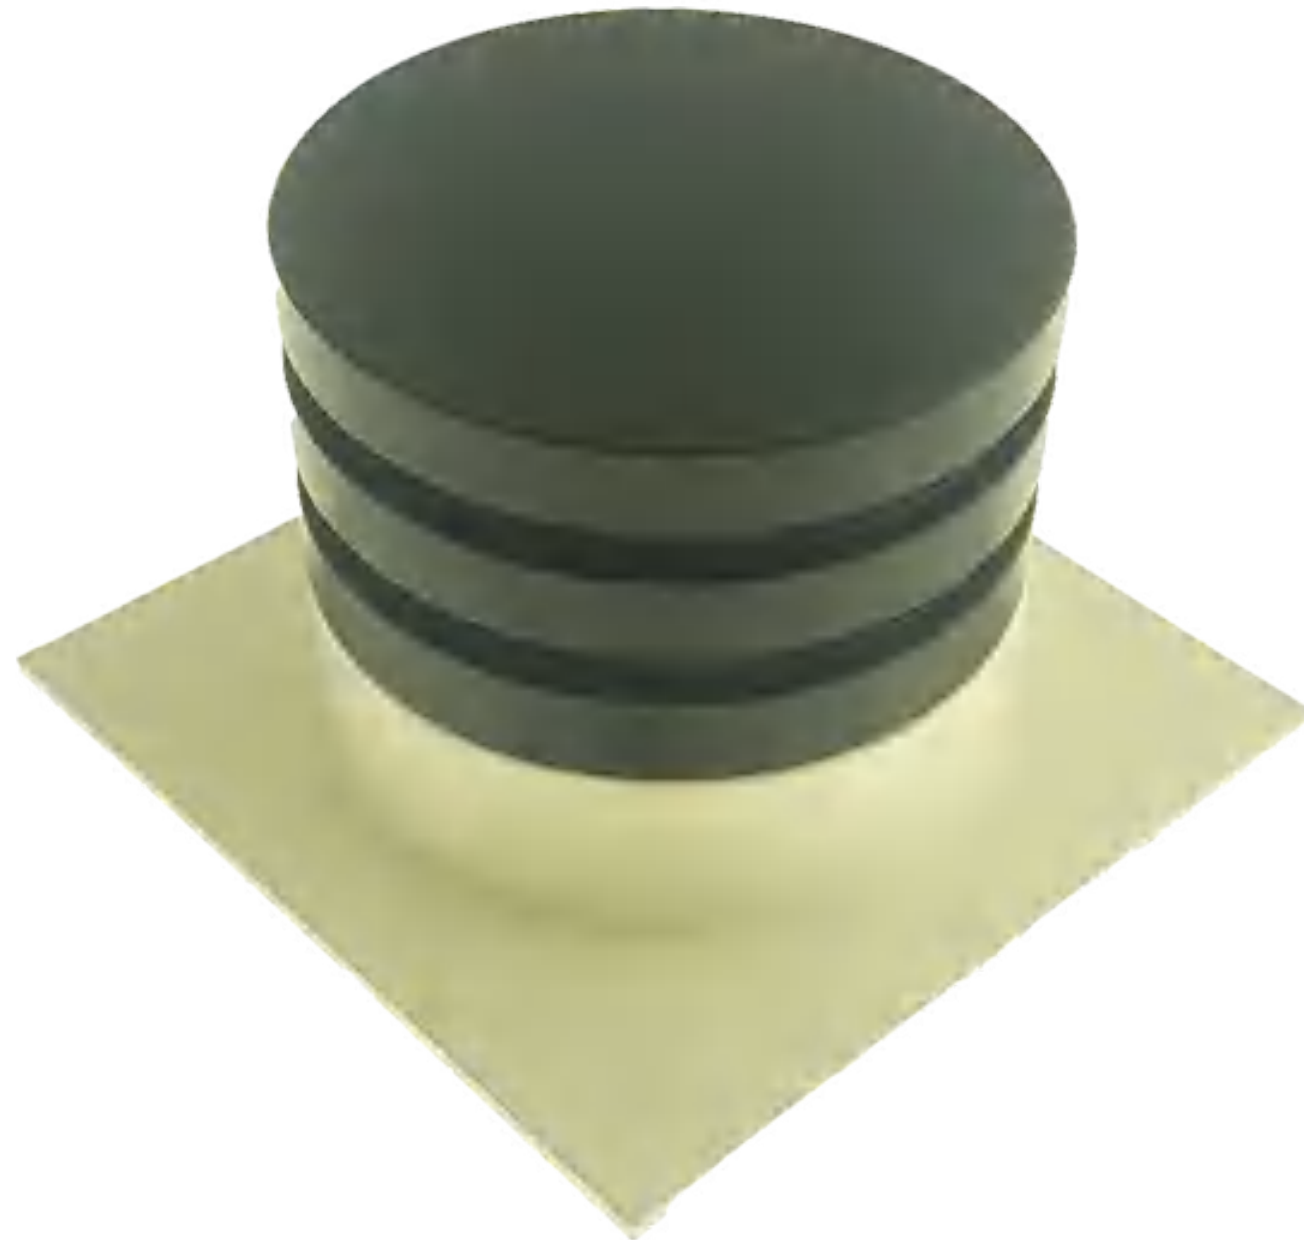

# ASYS LIGHT


## ALXSYS DOLI DATASHEET

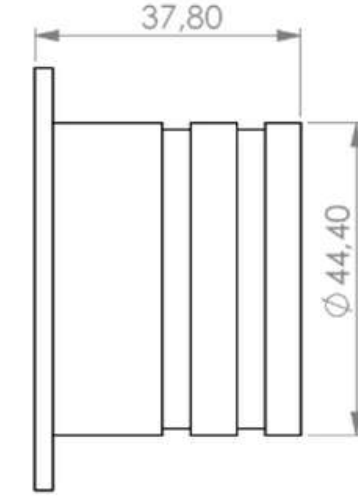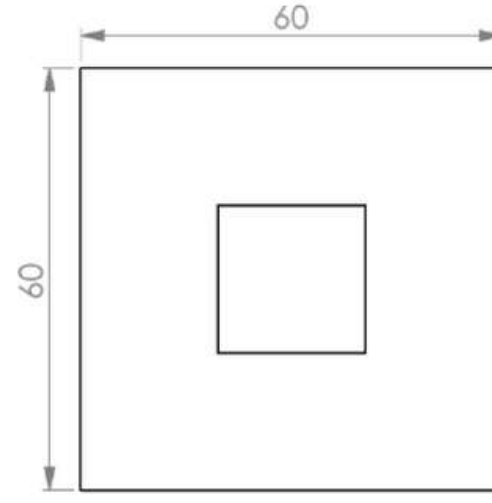

<b>MODEL /SIZE</b>	<b>DOLI</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	1W, 2W, 3W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	45°
<b>LUMEN OUTPUT</b>	88LM, 176LM, 264LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF
<b>DIMENSIONS (mm)</b>	W/H/L: 60/60/37,8
<b>PANEL CUT OUT (mm)</b>	Q: 46
<b>HOUSING</b>	EXT ALU, TEMPERED GLASS
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	20

### GAMMA ANGLES:


45°

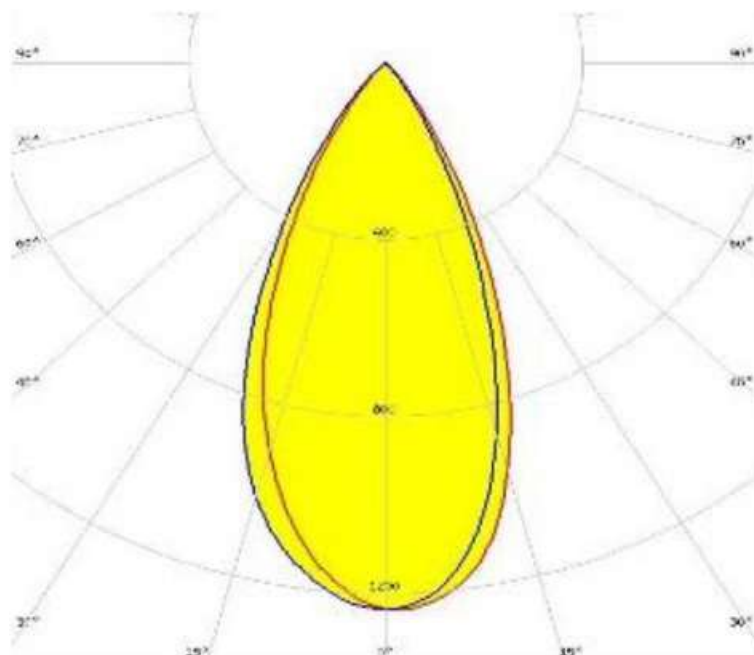

## ALXSYS EYMEN



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

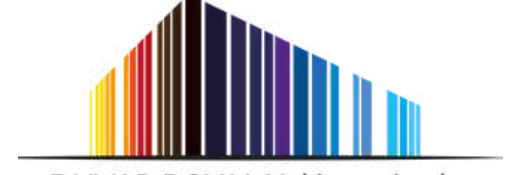

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING




MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING



DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




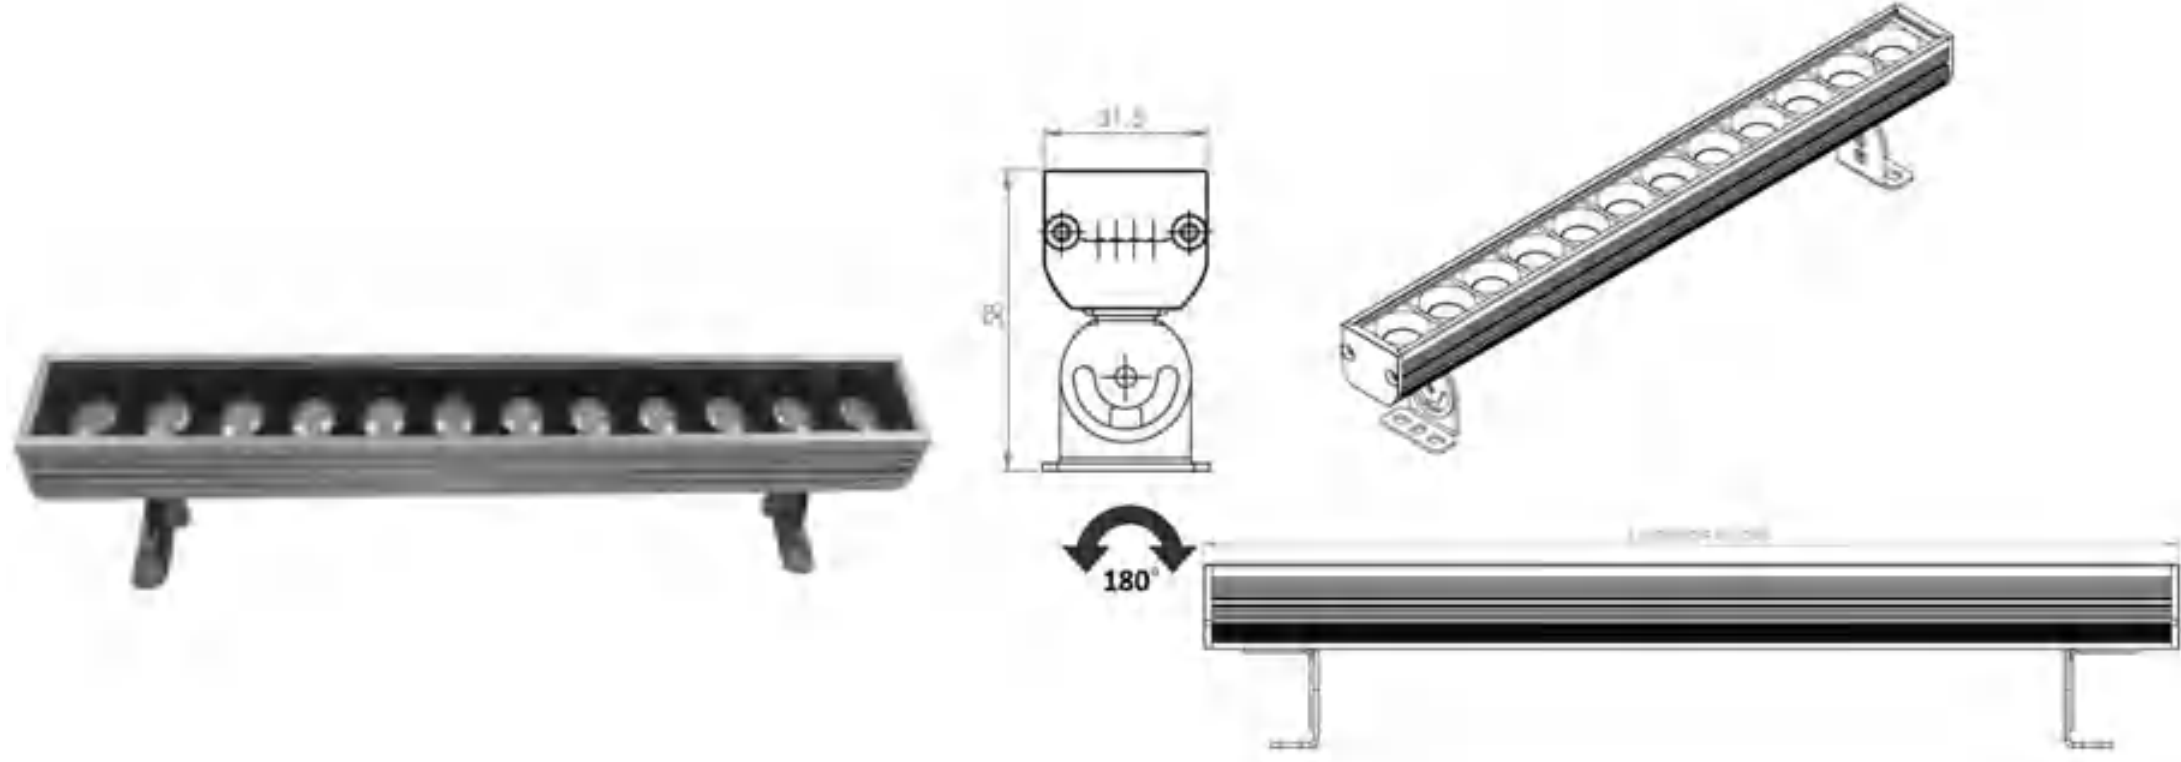


MODEL /SIZE	EYMEN LS32	EYMEN LS62	EYMEN LS92	EYMEN LS122
INTERIOR/EXTERIOR	INTERIOR	INTERIOR	INTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	14W	27W	40W	53W
CCT	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K
CRI	80+	80+	80+	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER	180-265 VAC / EXTERNAL DRIVER	180-265 VAC / EXTERNAL DRIVER	180-265 VAC / EXTERNAL DRIVER
BEAM ANGLE	15°, 25°, 40°, 20x45°	15°, 25°, 40°, 20x45°	15°, 25°, 40°, 20x45°	15°, 25°, 40°, 20x45°
LUMEN OUTPUT	1400LM	2700LM	4000LM	5300LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	W/H/L: 31,5/58/310	W/H/L: 31,5/58/610	W/H/L: 31,5/58/910	W/H/L: 31,5/58/1210
HOUSING	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER	RUBBER	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS	5 YEARS	5 YEARS
IP	40	40	40	40

### GAMMA ANGLES:


15°

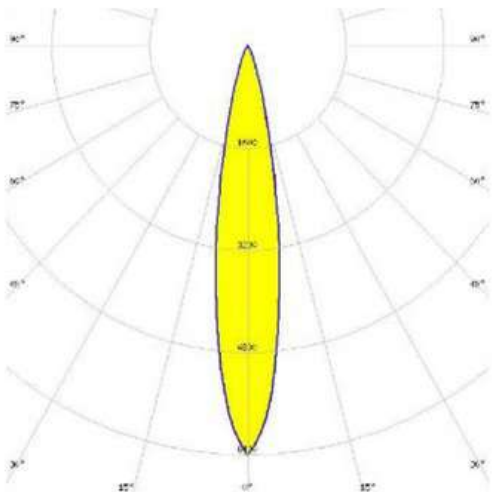


25°

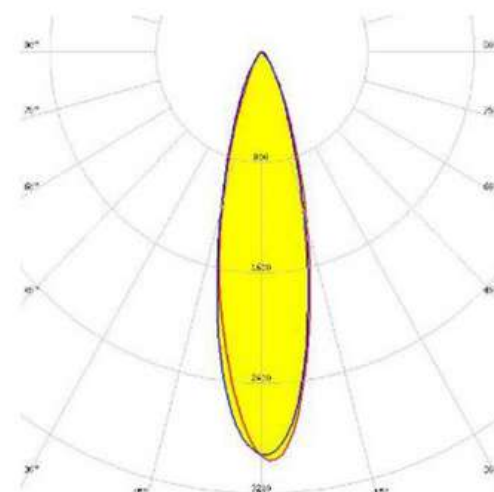

40°

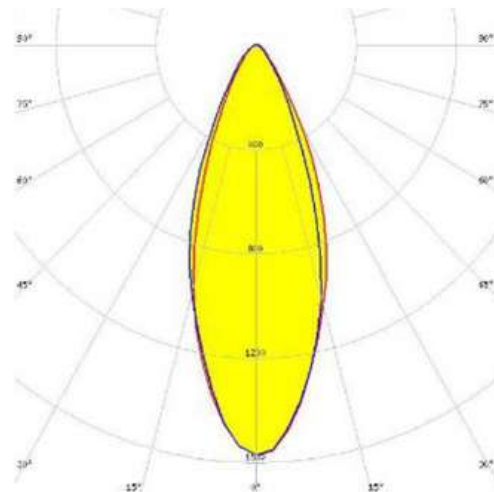

20X45°

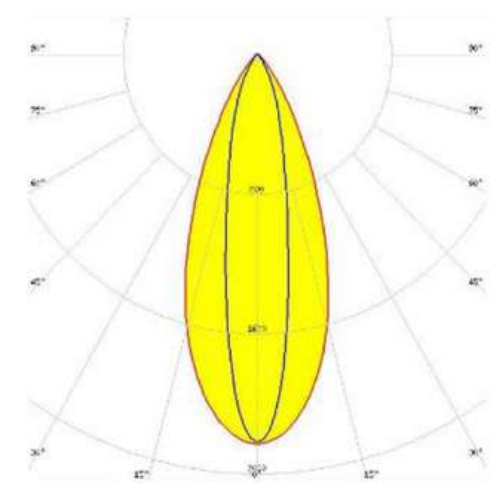

## ALXSYS GHINA



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)




# ASYS LIGHT

## ALXSYS GHINA DATASHEET

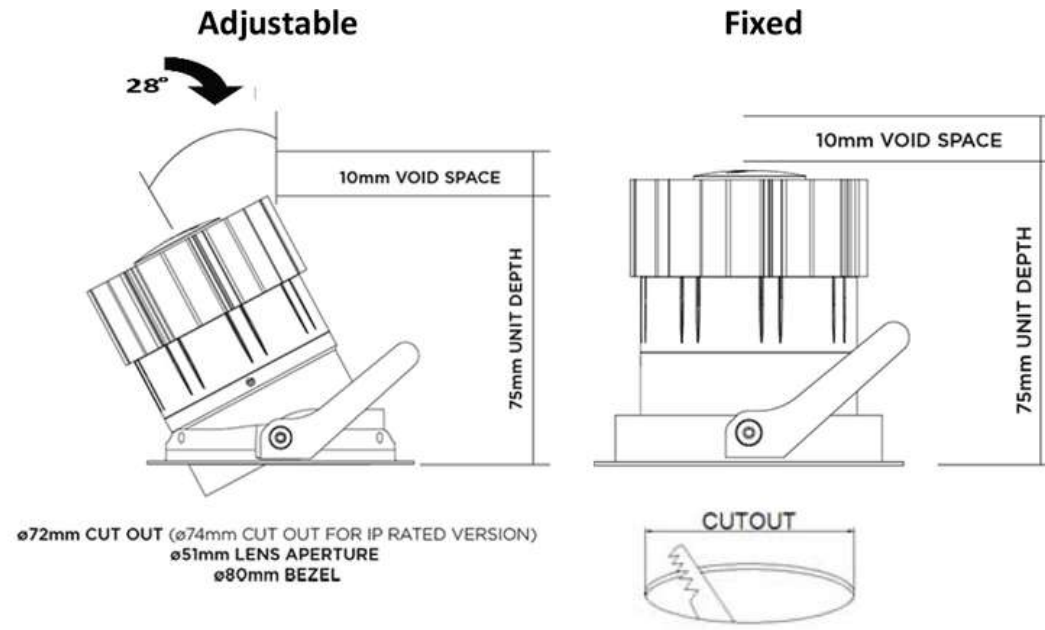

MODEL /SIZE	GHINA-11W
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER	11W
CCT	2700K-3000K-4000K
CRI	80+
VOLTAGE	180-265VAC / EXTERNAL DRIVER
BEAM ANGLE	10° - 25° - 40°
LUMEN OUTPUT	880LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF / DALI
DIMENSIONS (mm)	Q/H: 80/75
PANEL CUT OUT (mm)	Q: 72
HOUSING	EXT ALU, DIE ALU, PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IP	20 / 44

### GAMMA ANGLES:

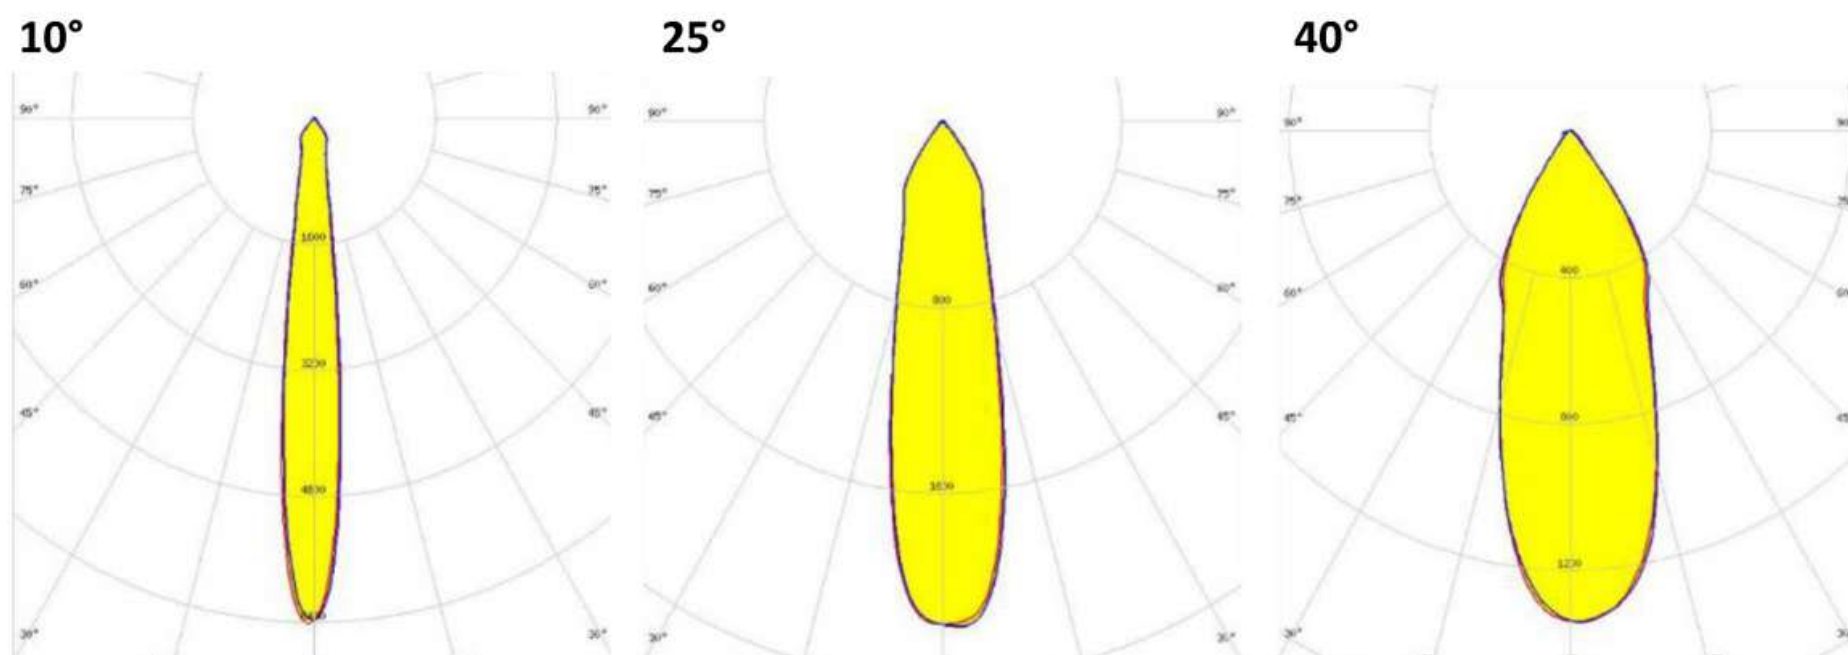





## ALXSYS JASMIN






# asys LIGHT

## ALXSYS JASMIN DATASHEET

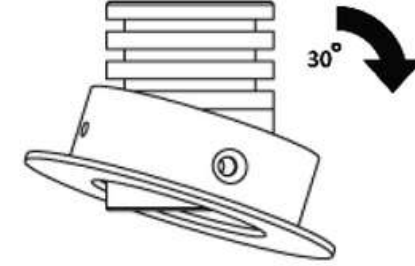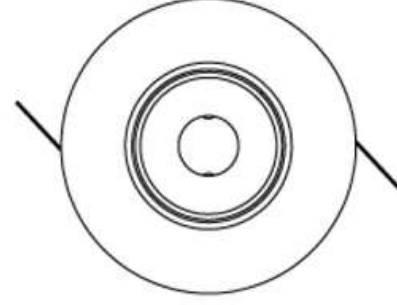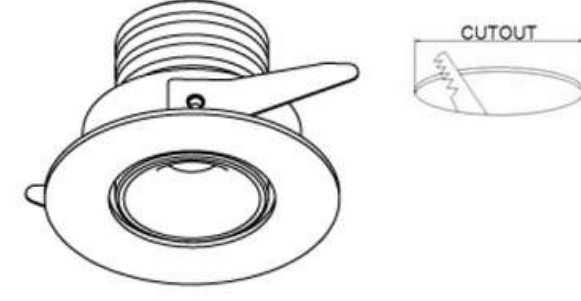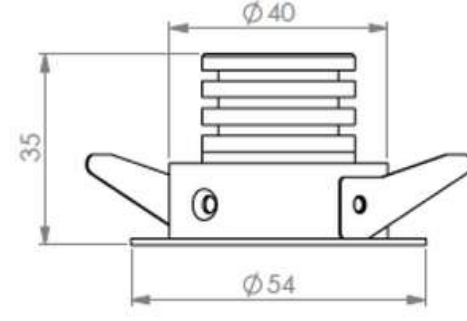


<b>MODEL /SIZE</b>	<b>JASMIN</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR / EXTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	2W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265 VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	12°,45°,60°,90°,19-34°ASYM
<b>LUMEN OUTPUT</b>	160LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF / DALI
<b>DIMENSIONS (mm)</b>	Q/H: 54/35
<b>PANEL CUT OUT (mm)</b>	Q:42
<b>HOUSING</b>	EXT. ALU
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	65

### GAMMA ANGLES:

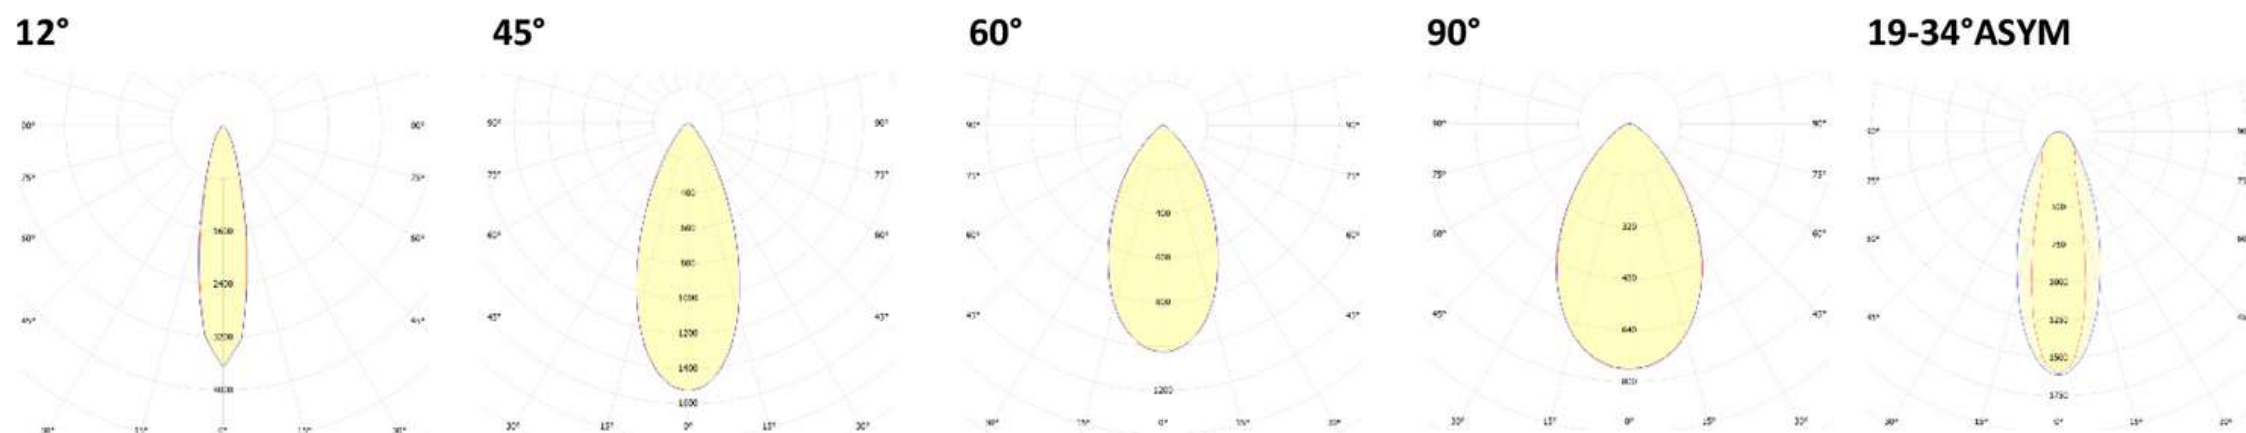

## ALXSYS LENA




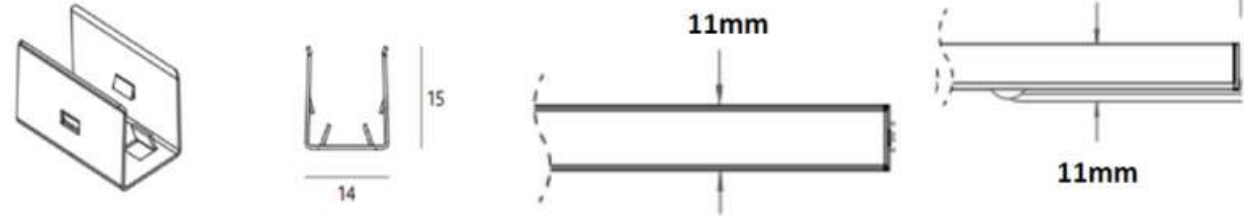

MODEL /SIZE	LENA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER	5W/MT - 12W/MT
CCT	2700K-3000K-4000K-6500K
CRI	80+
VOLTAGE	24VDC / EXTERNAL DRIVER
BEAM ANGLE	120°
LUMEN OUTPUT	650LM/MT – 1440LM/MT
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF / DALI
DIMENSIONS (mm)	W/H: 11/11
HOUSING	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER
WARRANTY	5 YEARS
IP	40

### GAMMA ANGLES:

120°

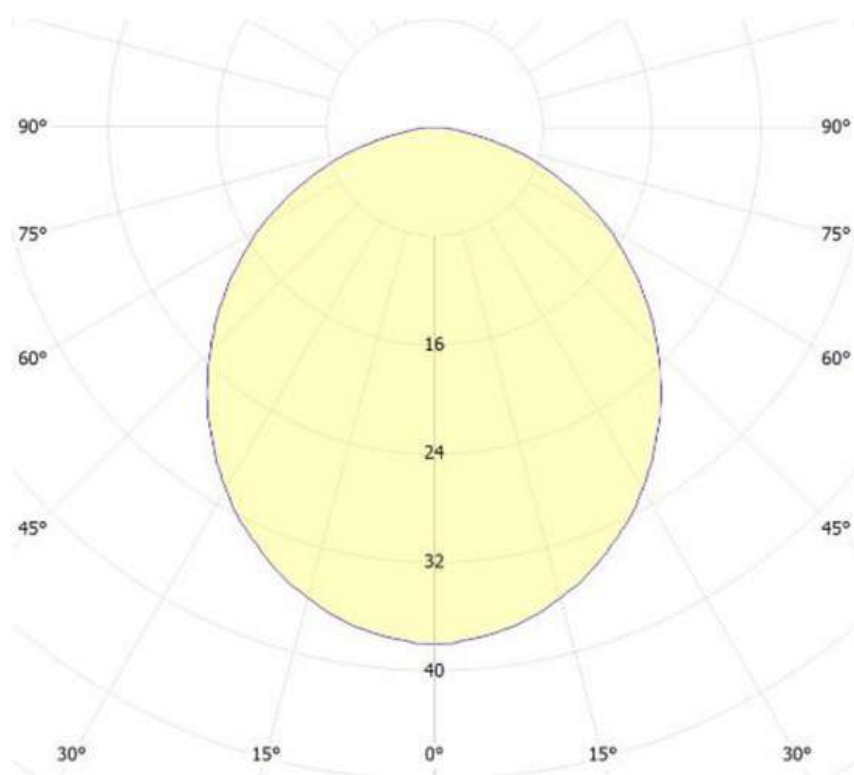

## ALXSYS LINEER



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)



# ASYS LIGHT


## ALXSYS LINEER DATASHEET

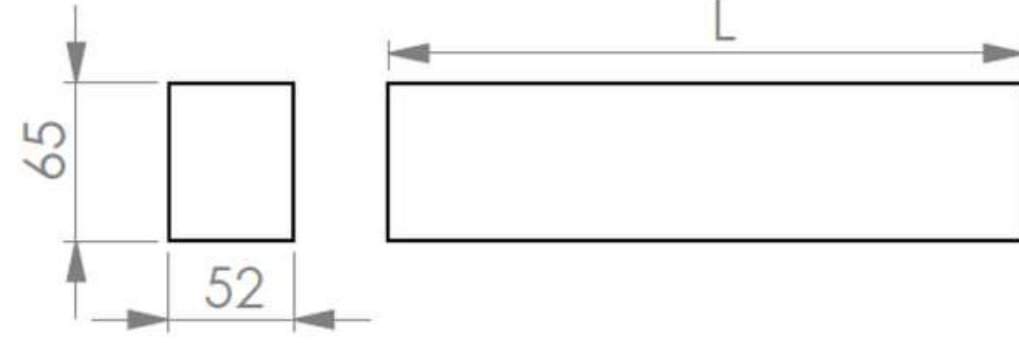


<b>MODEL /SIZE</b>	<b>STRIP 56LED/MT</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	8W - 10W - 14W
<b>CCT</b>	2700K -3000K – 4000K – 6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	24VDC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	177°
<b>LUMEN OUTPUT</b>	131LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF / DALI
<b>DIMENSIONS (mm)</b>	W/H/L: 16/2,2/1000
<b>CABLES</b>	PVC / RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	20

### GAMMA ANGLES:

177°

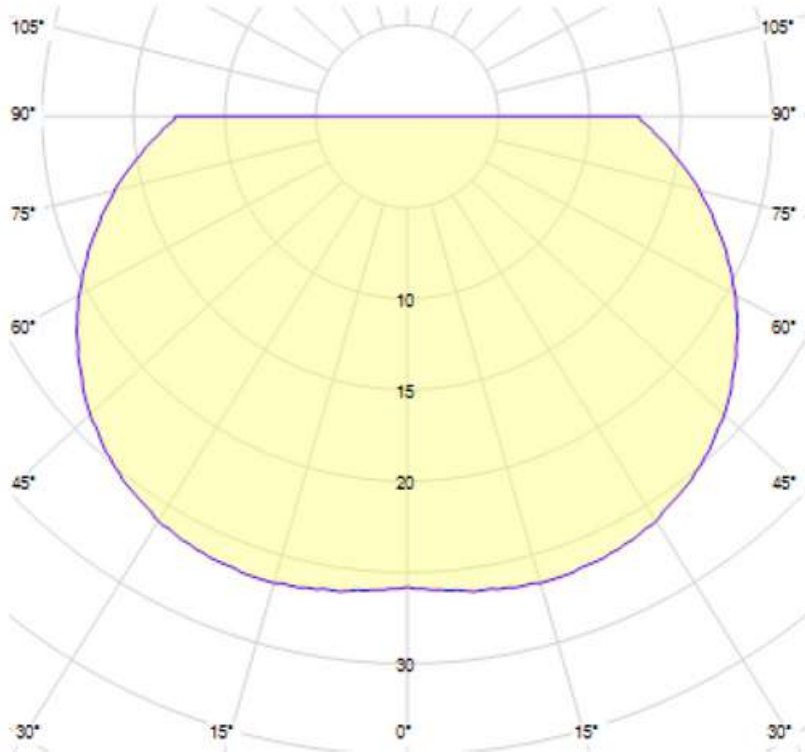

## ALXSYS LINESTRIP

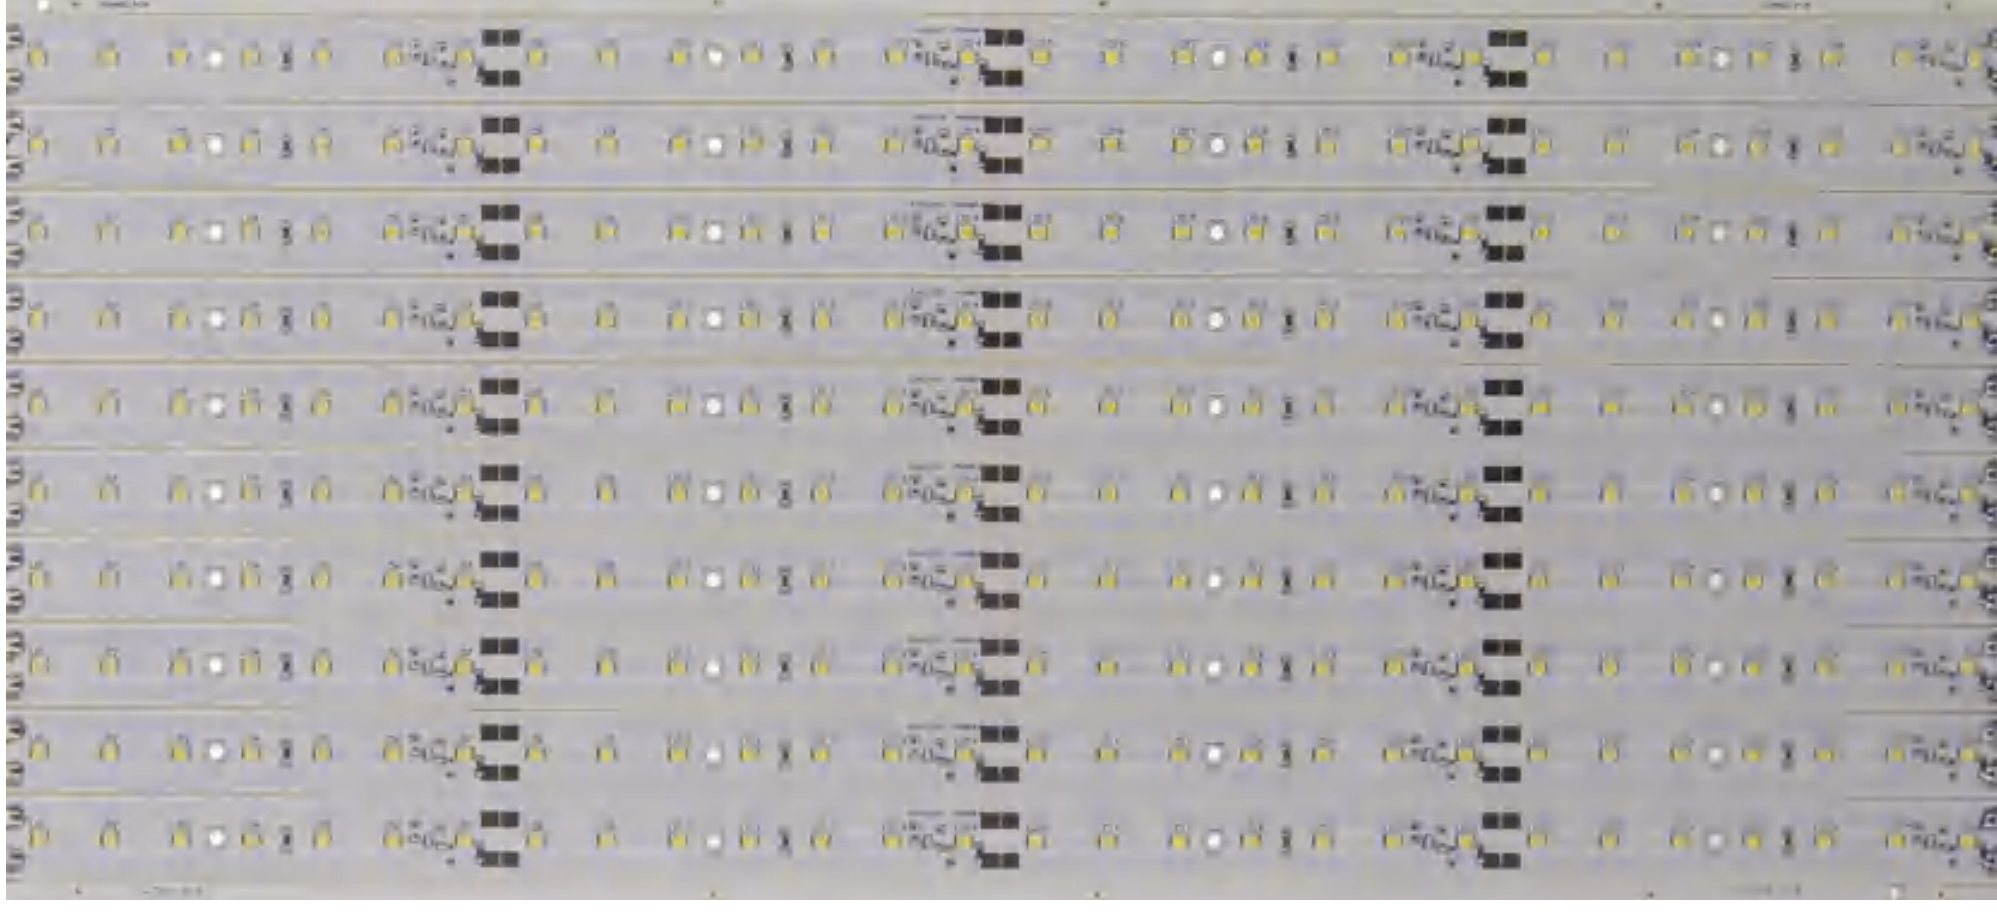




<b>MODEL /SIZE</b>	<b>STRIP 56LED/MT</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR
<b>LED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	8W - 10W - 14W
<b>CCT</b>	2700K -3000K – 4000K – 6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	24VDC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	177°
<b>LUMEN OUTPUT</b>	131LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF / DALI
<b>DIMENSIONS (mm)</b>	W/H/L: 16/2,2/1000
<b>CABLES</b>	PVC / RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	20

### GAMMA ANGLES:

177°

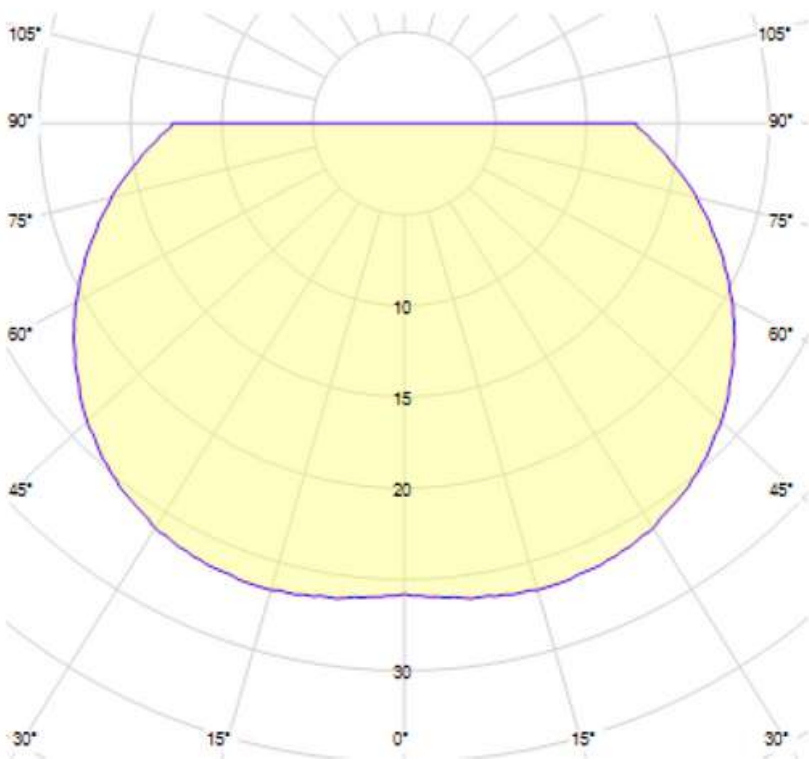

## ALXSYS LUNA



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)





# asys LIGHT


## ALXSYS LUNA DATASHEET

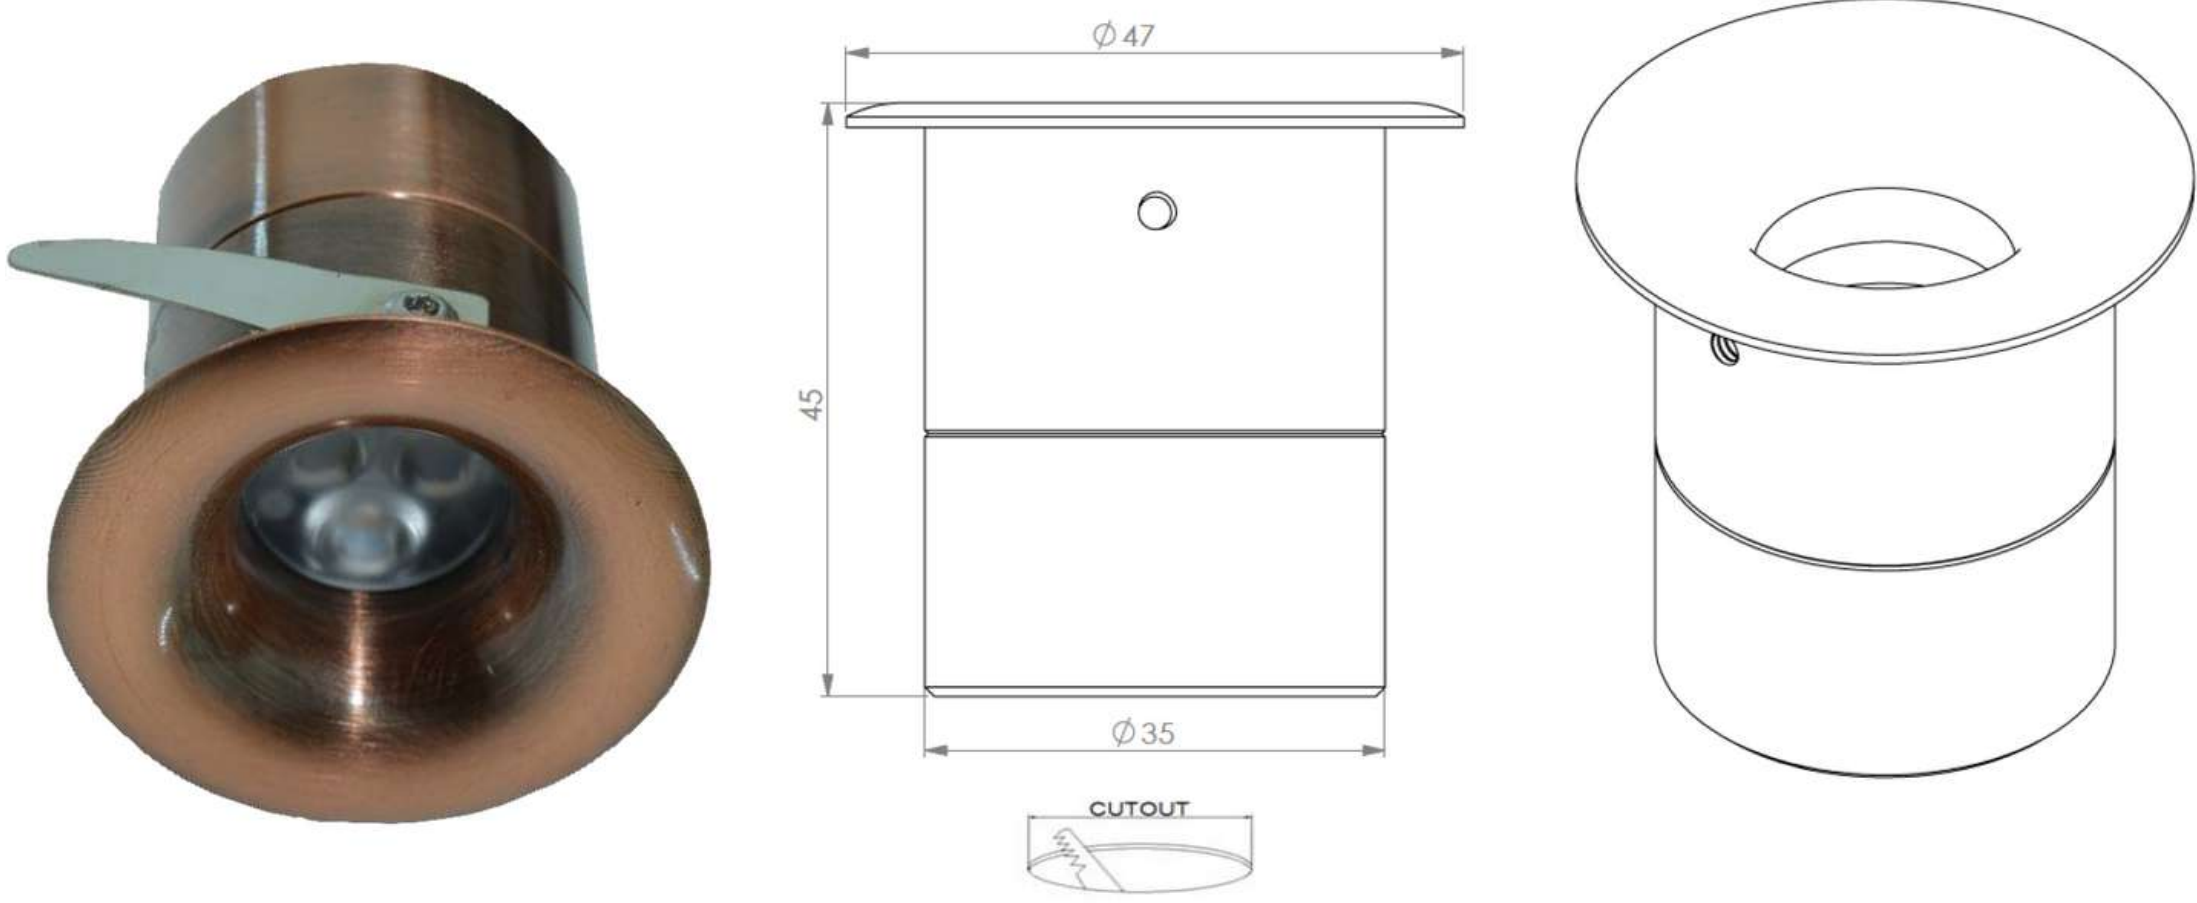

MODEL /SIZE	LUNA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER	3W
CCT	2700K-3000K-4000K-6500K
CRI	80+
VOLTAGE	180-265 VAC / EXTERNAL DRIVER
BEAM ANGLE	40°
LUMEN OUTPUT	350LM
STORAGE TEMPERATURE	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF
DIMENSIONS (mm)	Q/H: 47/45
PANEL CUT OUT (mm)	Q: 38
HOUSING	EXT ALU
CABLES	RUBBER
WARRANTY	5 YEARS
IP	IP54

### GAMMA ANGLES:

40°

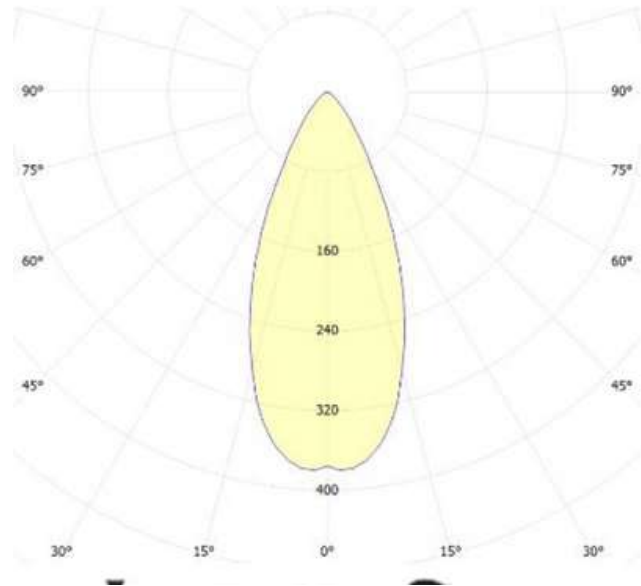


## ALXSYS NAZ




# ASYS LIGHT

ALXSYS NAZ DATASHEET

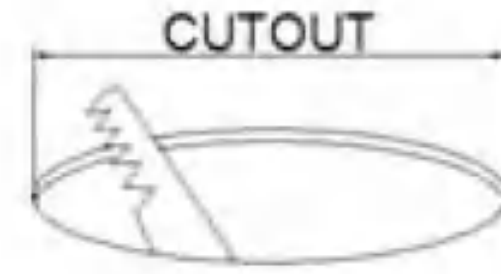

MODEL /SIZE	NAZ 4"	NAZ6"
INTERIOR/EXTERIOR	INTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	12W	24W
CCT	2700K-3000K-4000K-5000K-6500K	2700K-3000K-4000K-5000K-6500K
CRI	80+	80+
VOLTAGE	180-265VAC / EXTERNAL DRIVER	180-265VAC / EXTERNAL DRIVER
BEAM ANGLE	120°	120°
LUMEN OUTPUT	1200LM	2400LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	Q: 120	Q: 177
PANEL CUT OUT (mm)	Q: 105	Q: 152
HOUSING	DIE ALU, PMMA	DIE ALU, PMMA
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	20	20


**GAMMA ANGLES:**

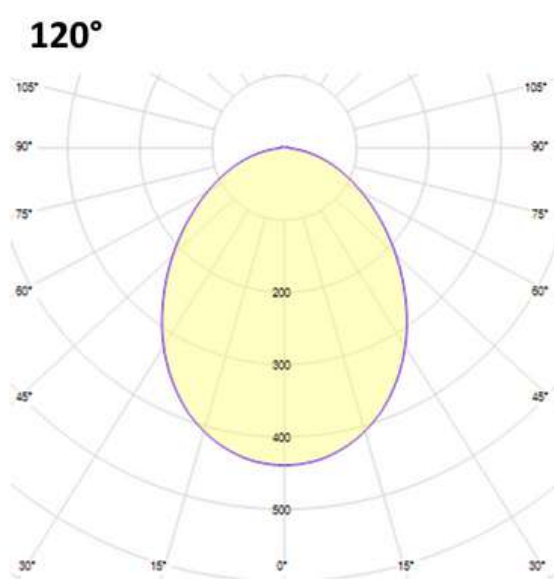

## ALXSYS REA



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

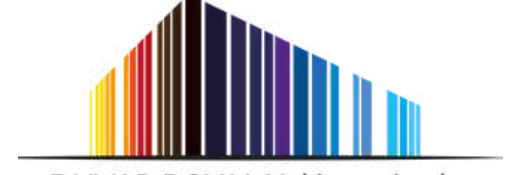

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING





DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)



# asys LIGHT


ALXSYS REA DATASHEET

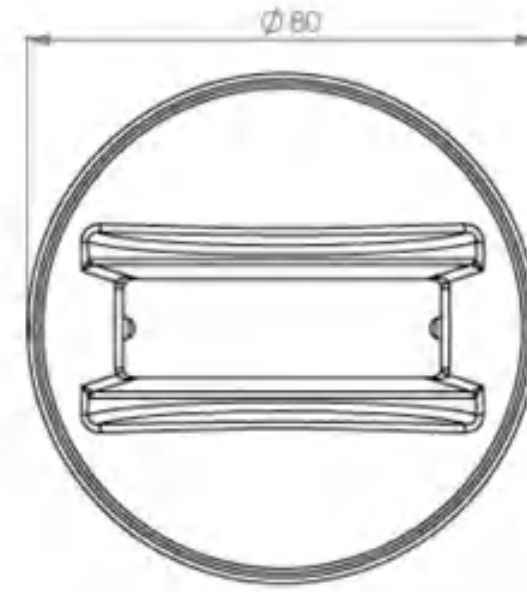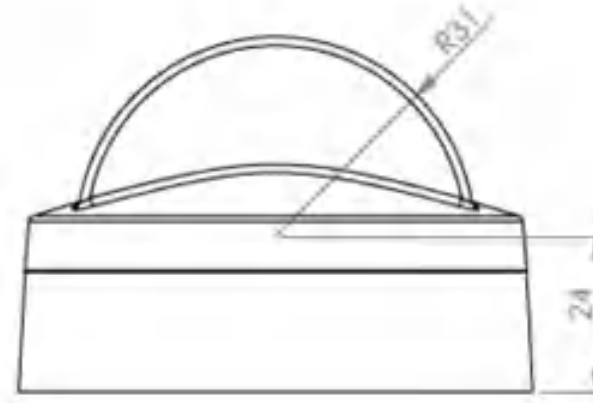

<b>MODEL /SIZE</b>	<b>REA</b>
<b>INTERIOR/EXTERIOR</b>	INTERIOR
<b>NLED</b>	CREE / SAMSUNG / SEOUL
<b>POWER</b>	3 W
<b>CCT</b>	2700K-3000K-4000K-6500K
<b>CRI</b>	80+
<b>VOLTAGE</b>	180-265VAC / EXTERNAL DRIVER
<b>BEAM ANGLE</b>	3X180°
<b>LUMEN OUTPUT</b>	200LM
<b>STORAGE TEMPERATURE</b>	-40C / +80C
<b>OPERATING TEMPERATURE</b>	-40C / +60C
<b>CONTROL</b>	ON-OFF
<b>DIMENSIONS (mm)</b>	Q/L: 80/55
<b>HOUSING</b>	DIE ALU, UV STABILIZED PMMA
<b>CABLES</b>	RUBBER
<b>WARRANTY</b>	5 YEARS
<b>IP</b>	IP40

**GAMMA ANGLES:**


**3X180 °**

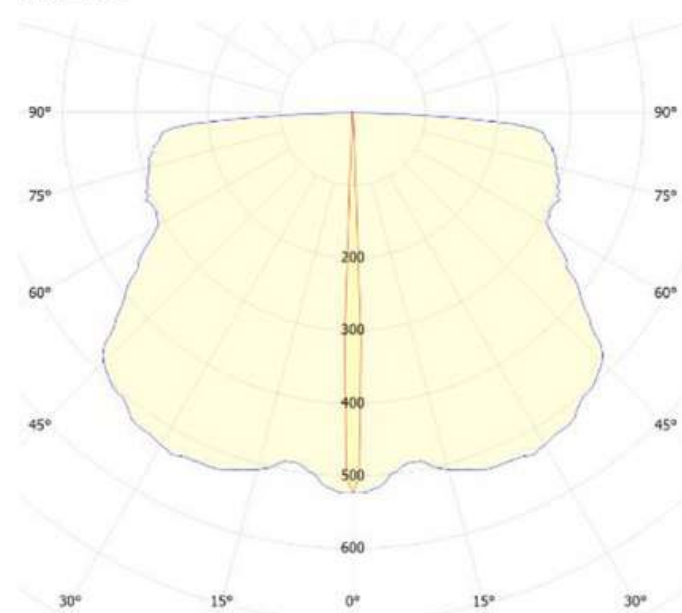

## ALXSYS SIERRA



MİMARİ AYDINLATMA  
ARCHITECTURAL LIGHTING

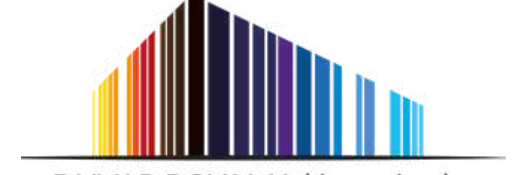

DUVAR BOYAMA (dış mekan)  
WALLWASH (outdoor)



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING



MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING




DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)



# ASYS LIGHT


## ALXSYS SIERRA DATASHEET

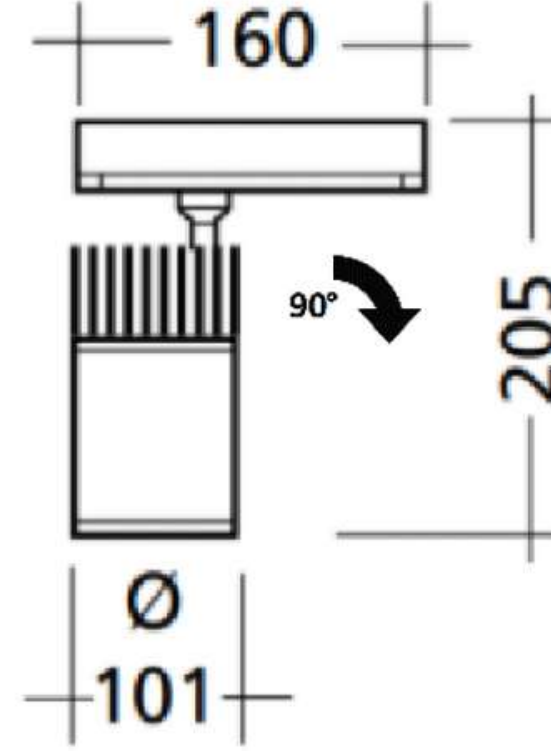


MODEL /SIZE	SIERRA
INTERIOR/EXTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL
POWER	40W
CCT	2700K-3000K-4000K
CRI	80+
VOLTAGE	180-265 VAC
BEAM ANGLE	15°, 24°, 36°, 40°
LUMEN OUTPUT	5200LM
STORAGE TEMPERATURE	-10C / +50C
OPERATING TEMPERATURE	-40C / +60C
CONTROL	ON-OFF
DIMENSIONS (mm)	Q/H: 101/205
HOUSING	DIE ALU, TEMPERED GLASS
CABLES	RUBBER
WARRANTY	5 YEARS
IP	20

### GAMMA ANGLES:


15°

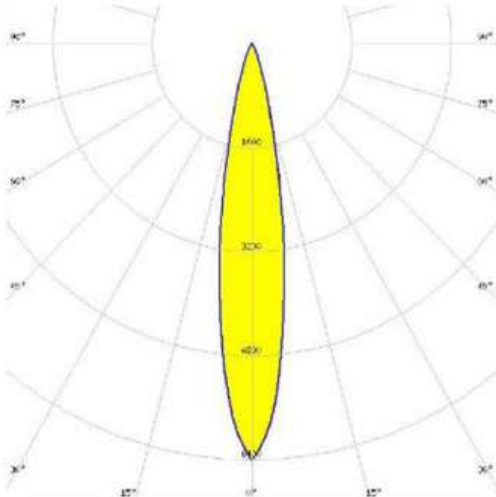


24°

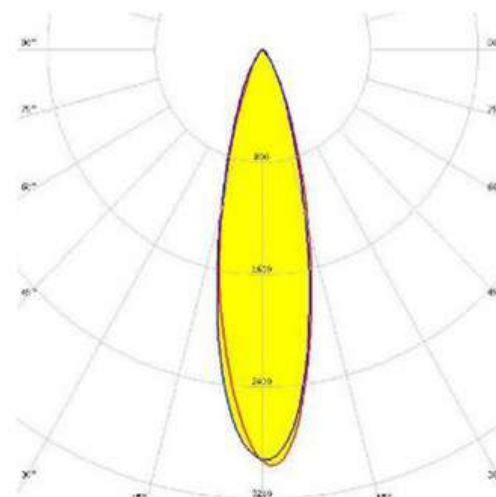

36°

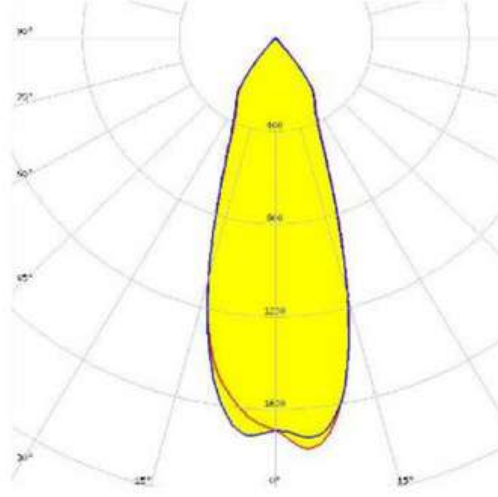

40°

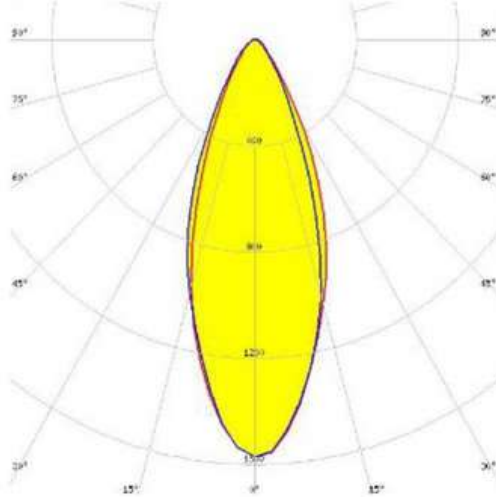



## ALXSYS WILMA






# ASYS LIGHT

## ALXSYS WILMA DATASHEET

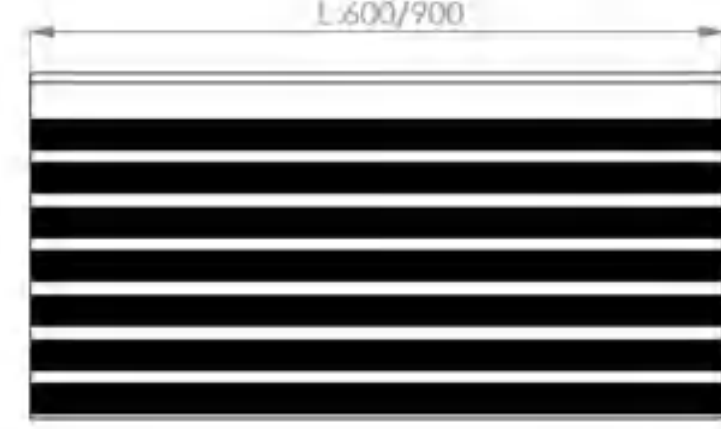
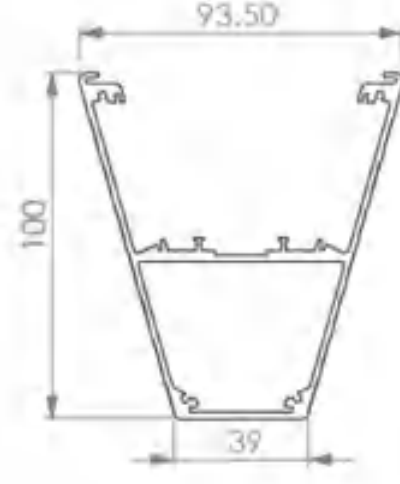




MODEL /SIZE	WILMA 600	WILMA 900
INTERIOR/EXTERIOR	INTERIOR	INTERIOR
LED	CREE / SAMSUNG / SEOUL	CREE / SAMSUNG / SEOUL
POWER	30W	50W
CCT	2700K-3000K-4000K-6500K	2700K-3000K-4000K-6500K
CRI	80+	80+
VOLTAGE	180-265 VAC	180-265 VAC
BEAM ANGLE	90°	90°
LUMEN OUTPUT	3000LM	5000LM
STORAGE TEMPERATURE	-40C / +80C	-40C / +80C
OPERATING TEMPERATURE	-40C / +60C	-40C / +60C
CONTROL	ON-OFF / DALI	ON-OFF / DALI
DIMENSIONS (mm)	W/H/L: 93,5/100/600	W/H/L: 93,5/100/900
HOUSING	EXT ALU, UV STABILIZED PMMA	EXT ALU, UV STABILIZED PMMA
CABLES	RUBBER	RUBBER
WARRANTY	5 YEARS	5 YEARS
IP	20	20

### GAMMA ANGLES:

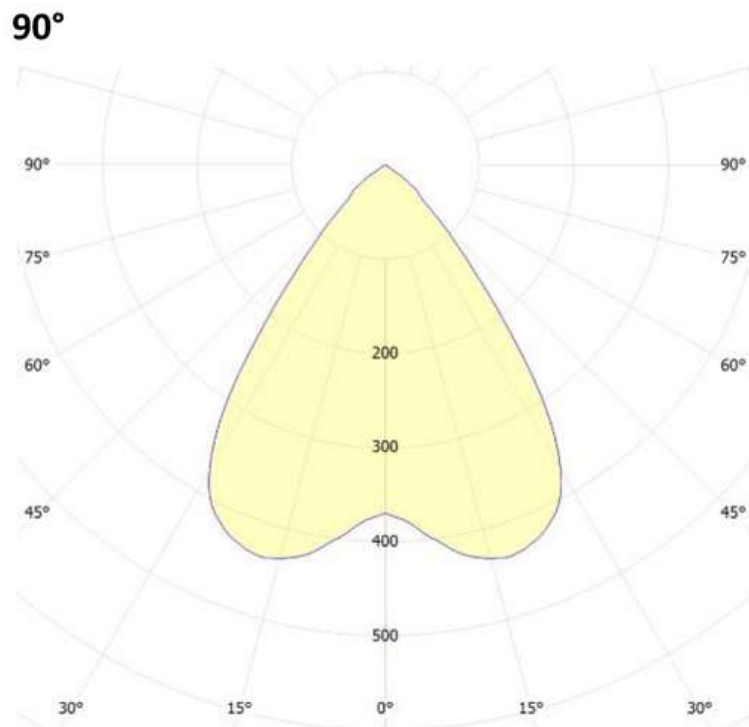

## ALXSYS 540X240

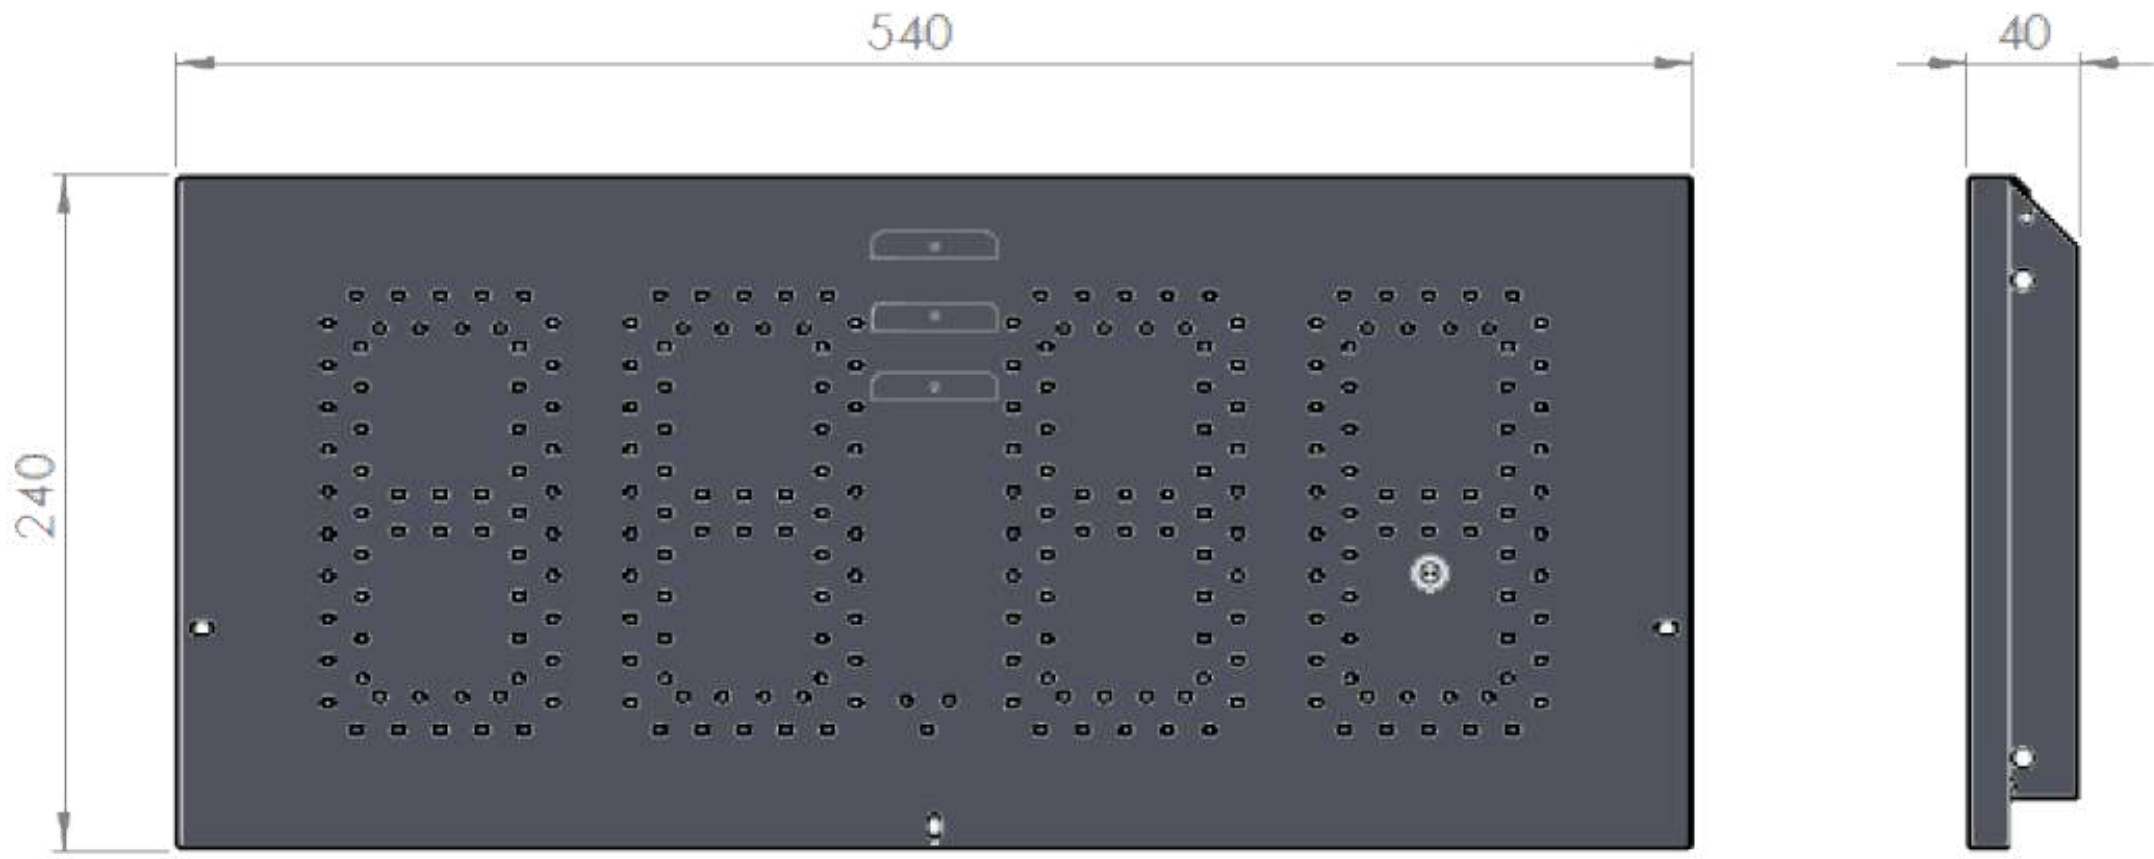
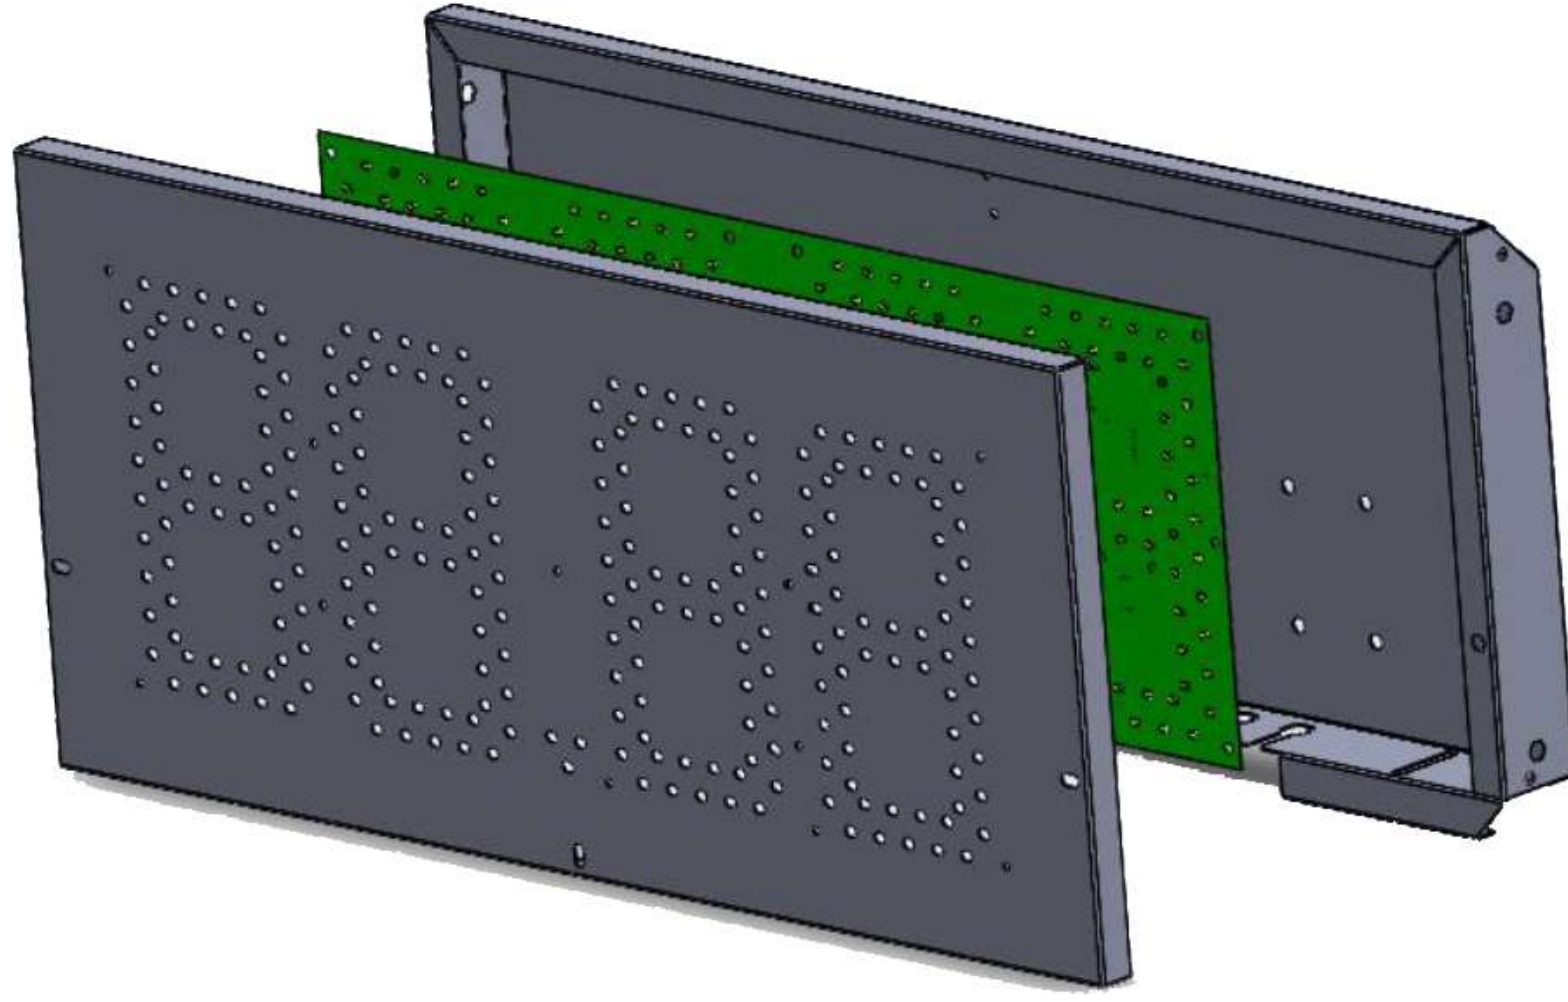


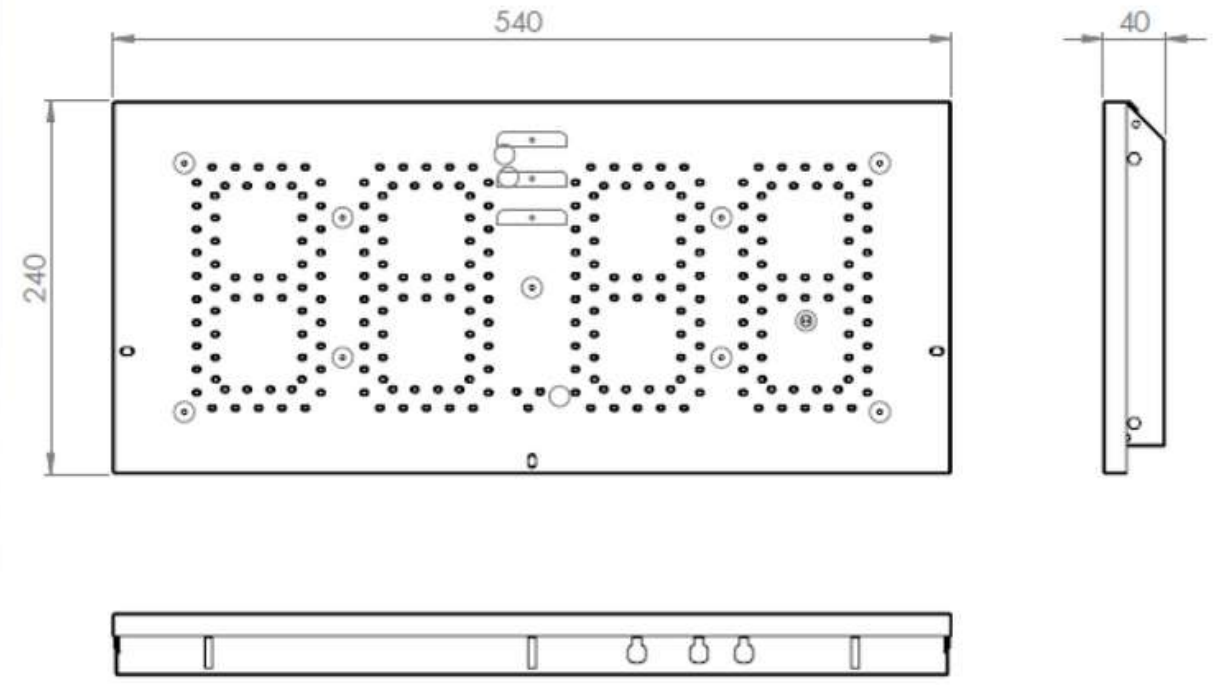
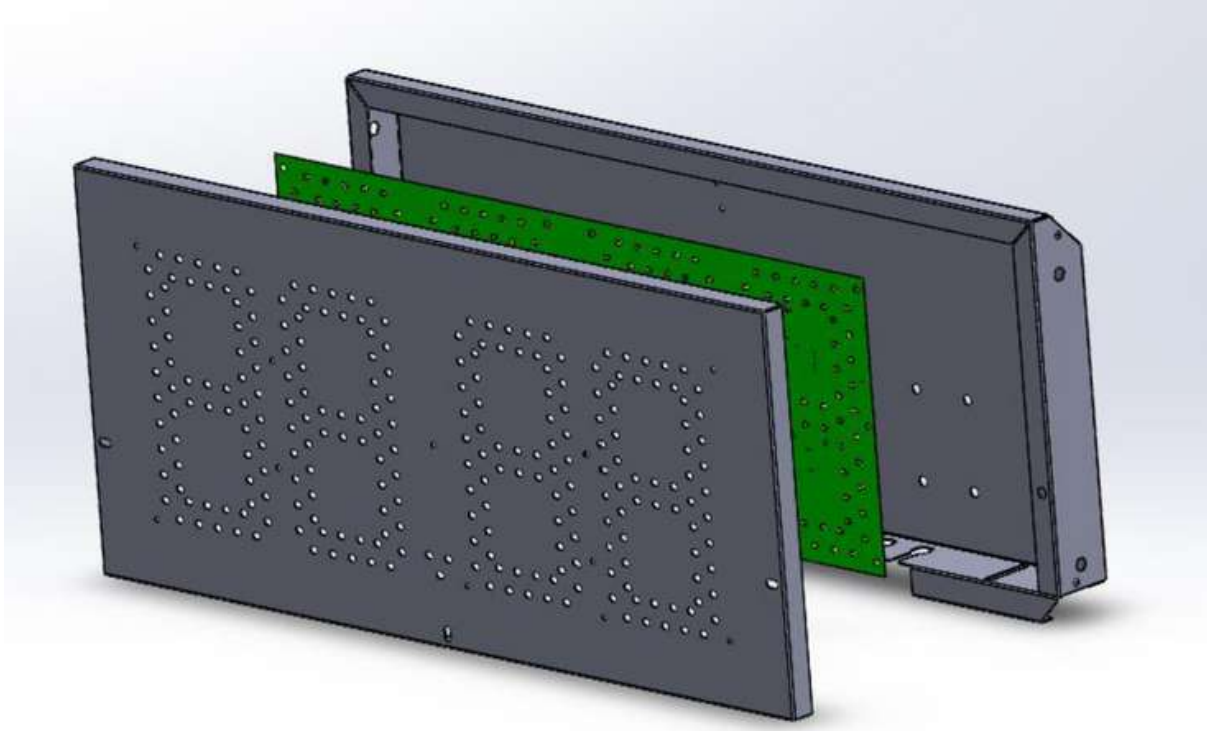


OPTIONS	SPECT	SIGN 540x240x40
INPUT	RATED INPUT VOLTAGE	220-240V AC
	RANGE OF INPUT VOLTAGE	110-240V AC
	FREQUENCY (Hz)	50/60 Hz
OUTPUT	PANEL SIZE (mm)	540x240x40
	DIGIT SIZE (mm)	159,20X85,5
	CCT	6500K
	CRI	80+
	BEAM ANGLE	120°
	POWER CONSUMPTION	<30W
	BRIGHTNESS ADJUSTMENT	% 10-100 DIM
	LED CHIP	CREE / SAMSUNG / SEOUL
	RATED LOAD	20W MAX
ENVIROMENT	OPERATING AMBIENT TEMPERATURE	-40°C / +80°C
	STORAGE TEMPERATURE	-40°C / +80°C
	HUMIDITY	%10-90 RH
	LIFE TIME (Hour)	50.000 @45°C
WARRANTY		5 YEARS



## ALXSYS 600X300

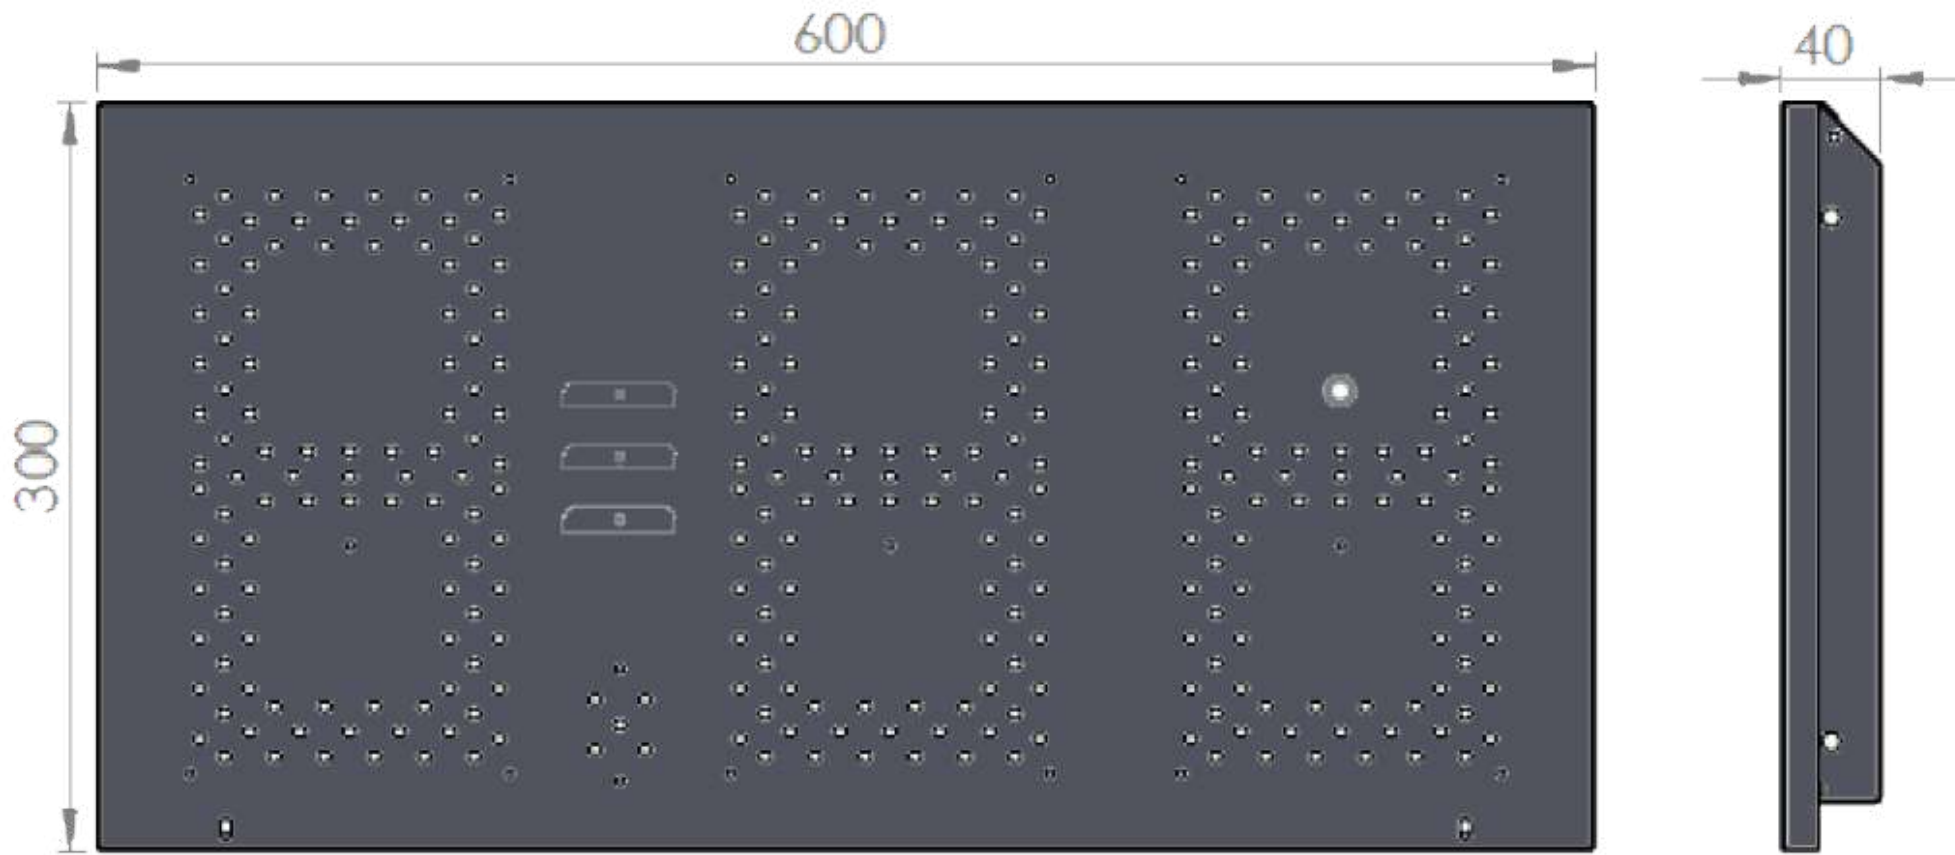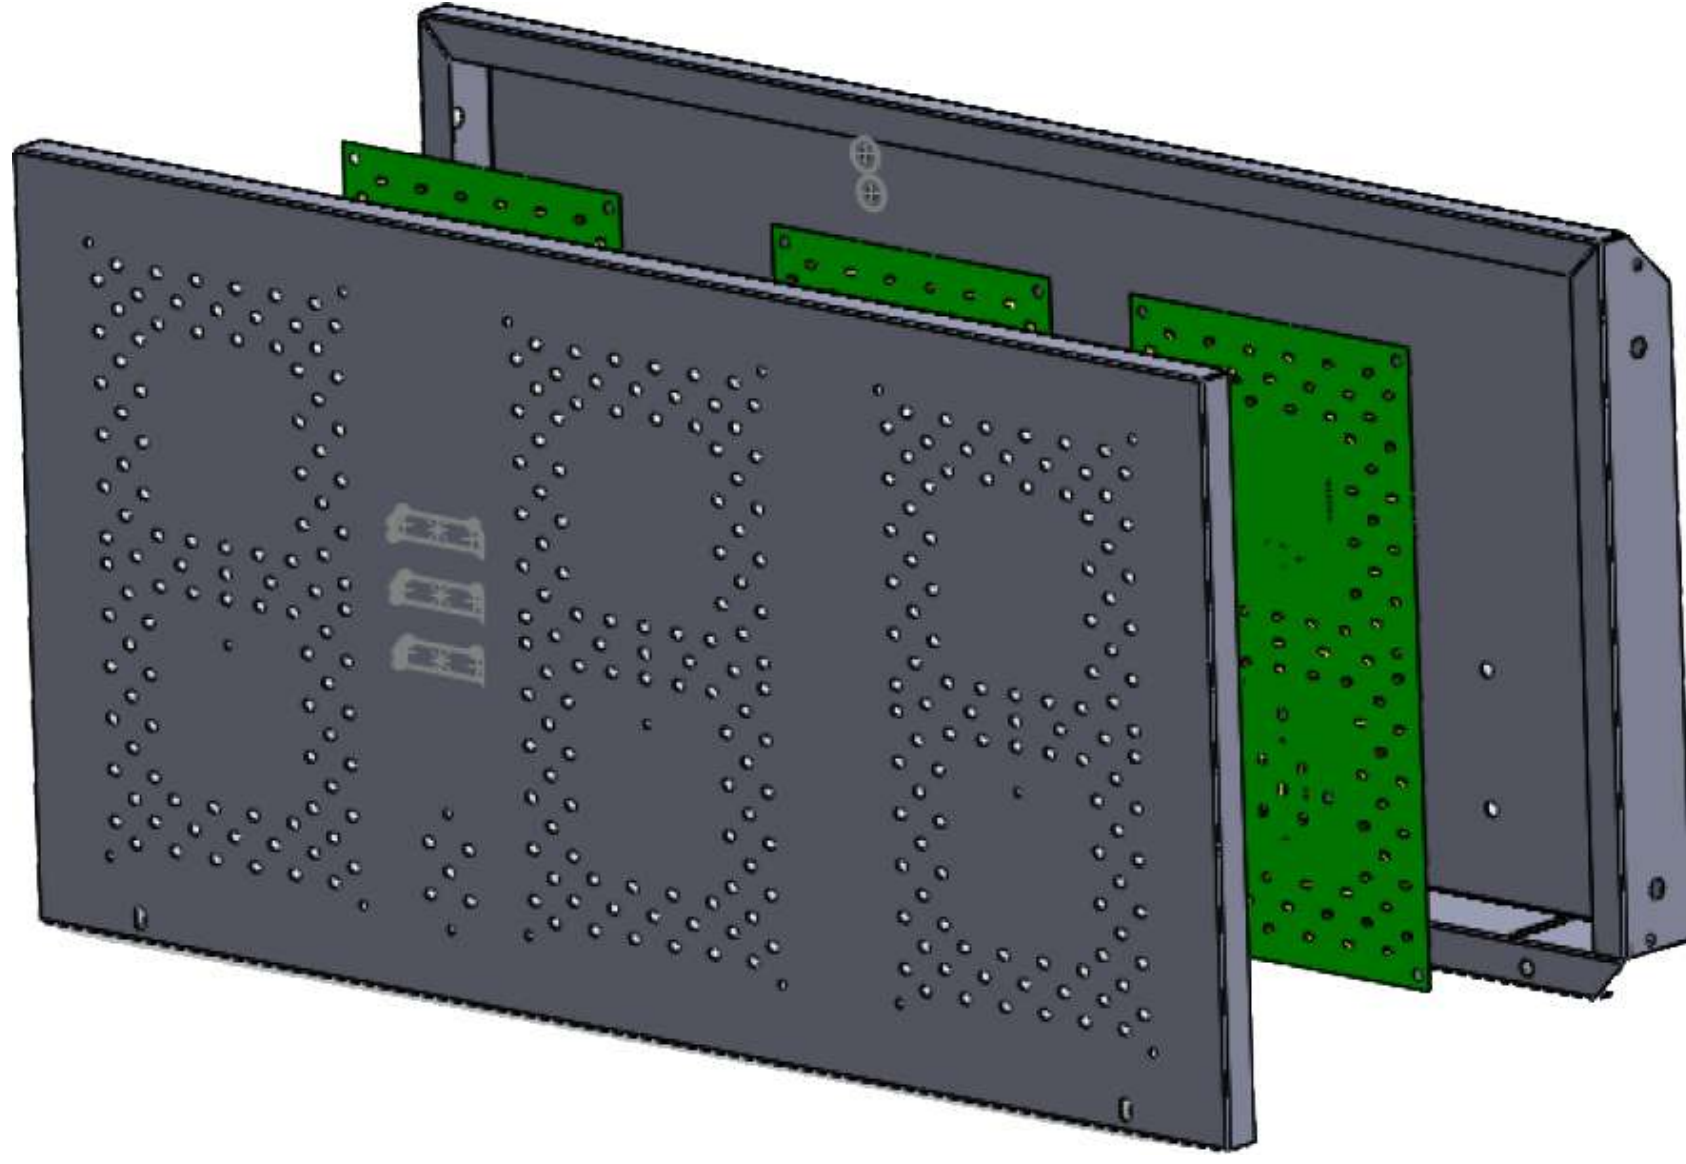


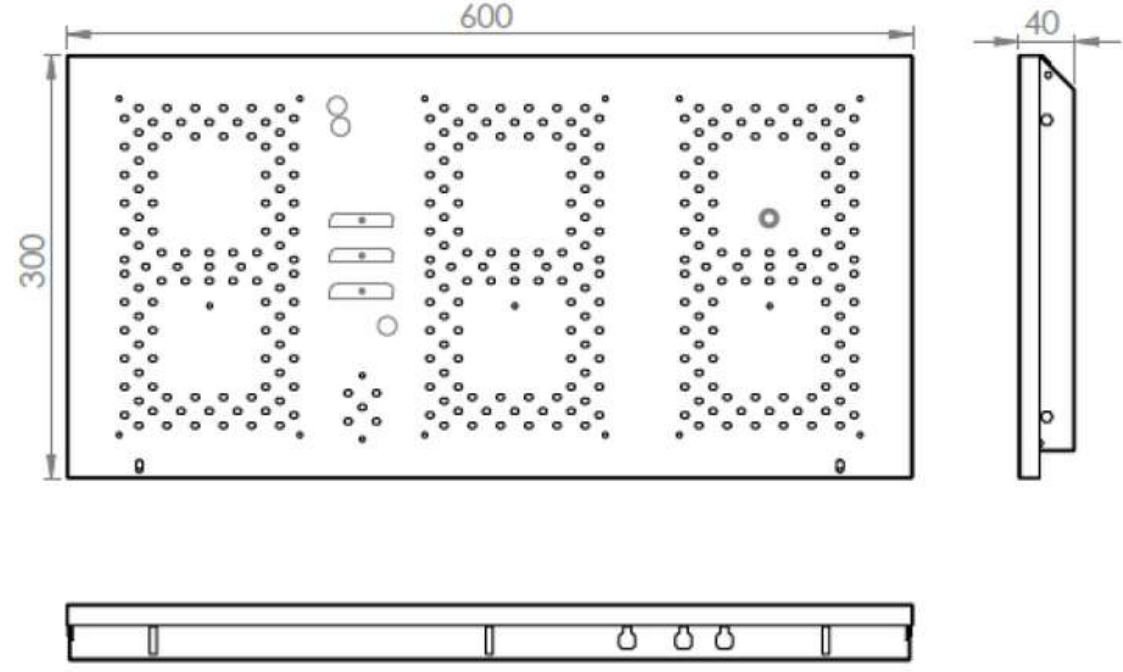
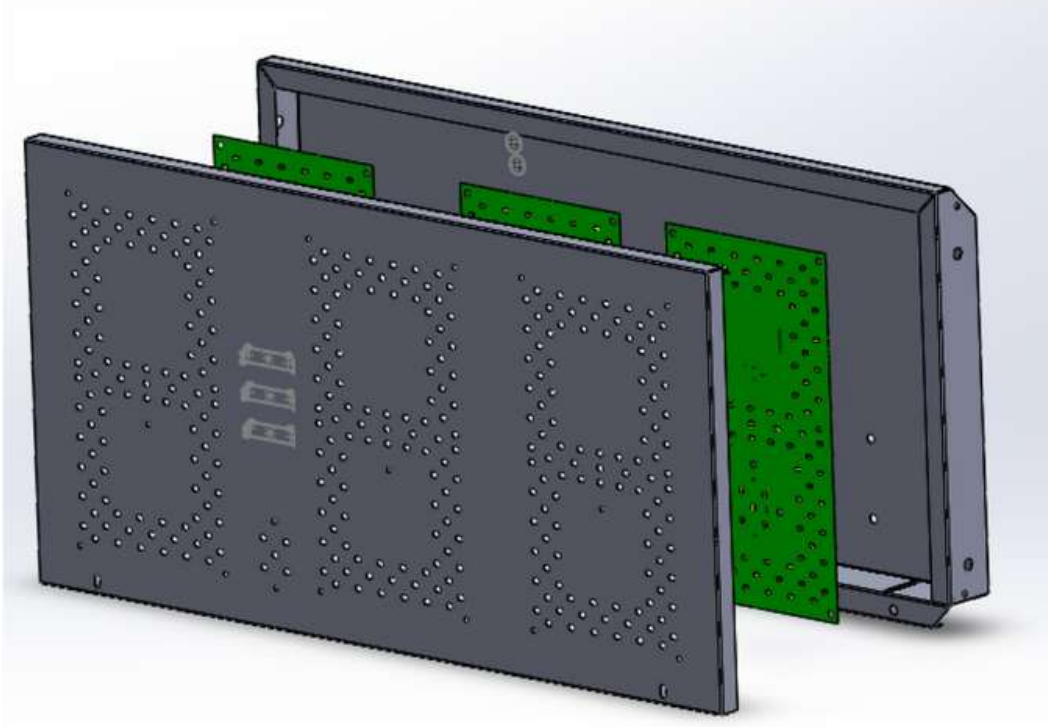


OPTIONS	SPECT	SIGN 600X300X40
INPUT	RATED INPUT VOLTAGE	220-240V AC
	RANGE OF INPUT VOLTAGE	110-240V AC
	FREQUENCY (Hz)	50/60 Hz
OUTPUT	PANEL SIZE (mm)	600X300X40
	DIGIT SIZE (mm)	230X127
	CCT	6500K
	CRI	80+
	BEAM ANGLE	120°
	POWER CONSUMPTION	<40W
	BRIGHTNESS ADJUSTMENT	% 10-100 DIM
	LED CHIP	CREE / SAMSUNG / SEOUL
	RATED LOAD	30W MAX
ENVIROMENT	OPERATING AMBIENT TEMPERATURE	-40°C / +80°C
	STORAGE TEMPERATURE	-40°C / +80°C
	HUMIDITY	%10-90 RH
	LIFE TIME (Hour)	50.000 @45°C
WARRANTY		5 YEARS



## ALXSYS 750X300


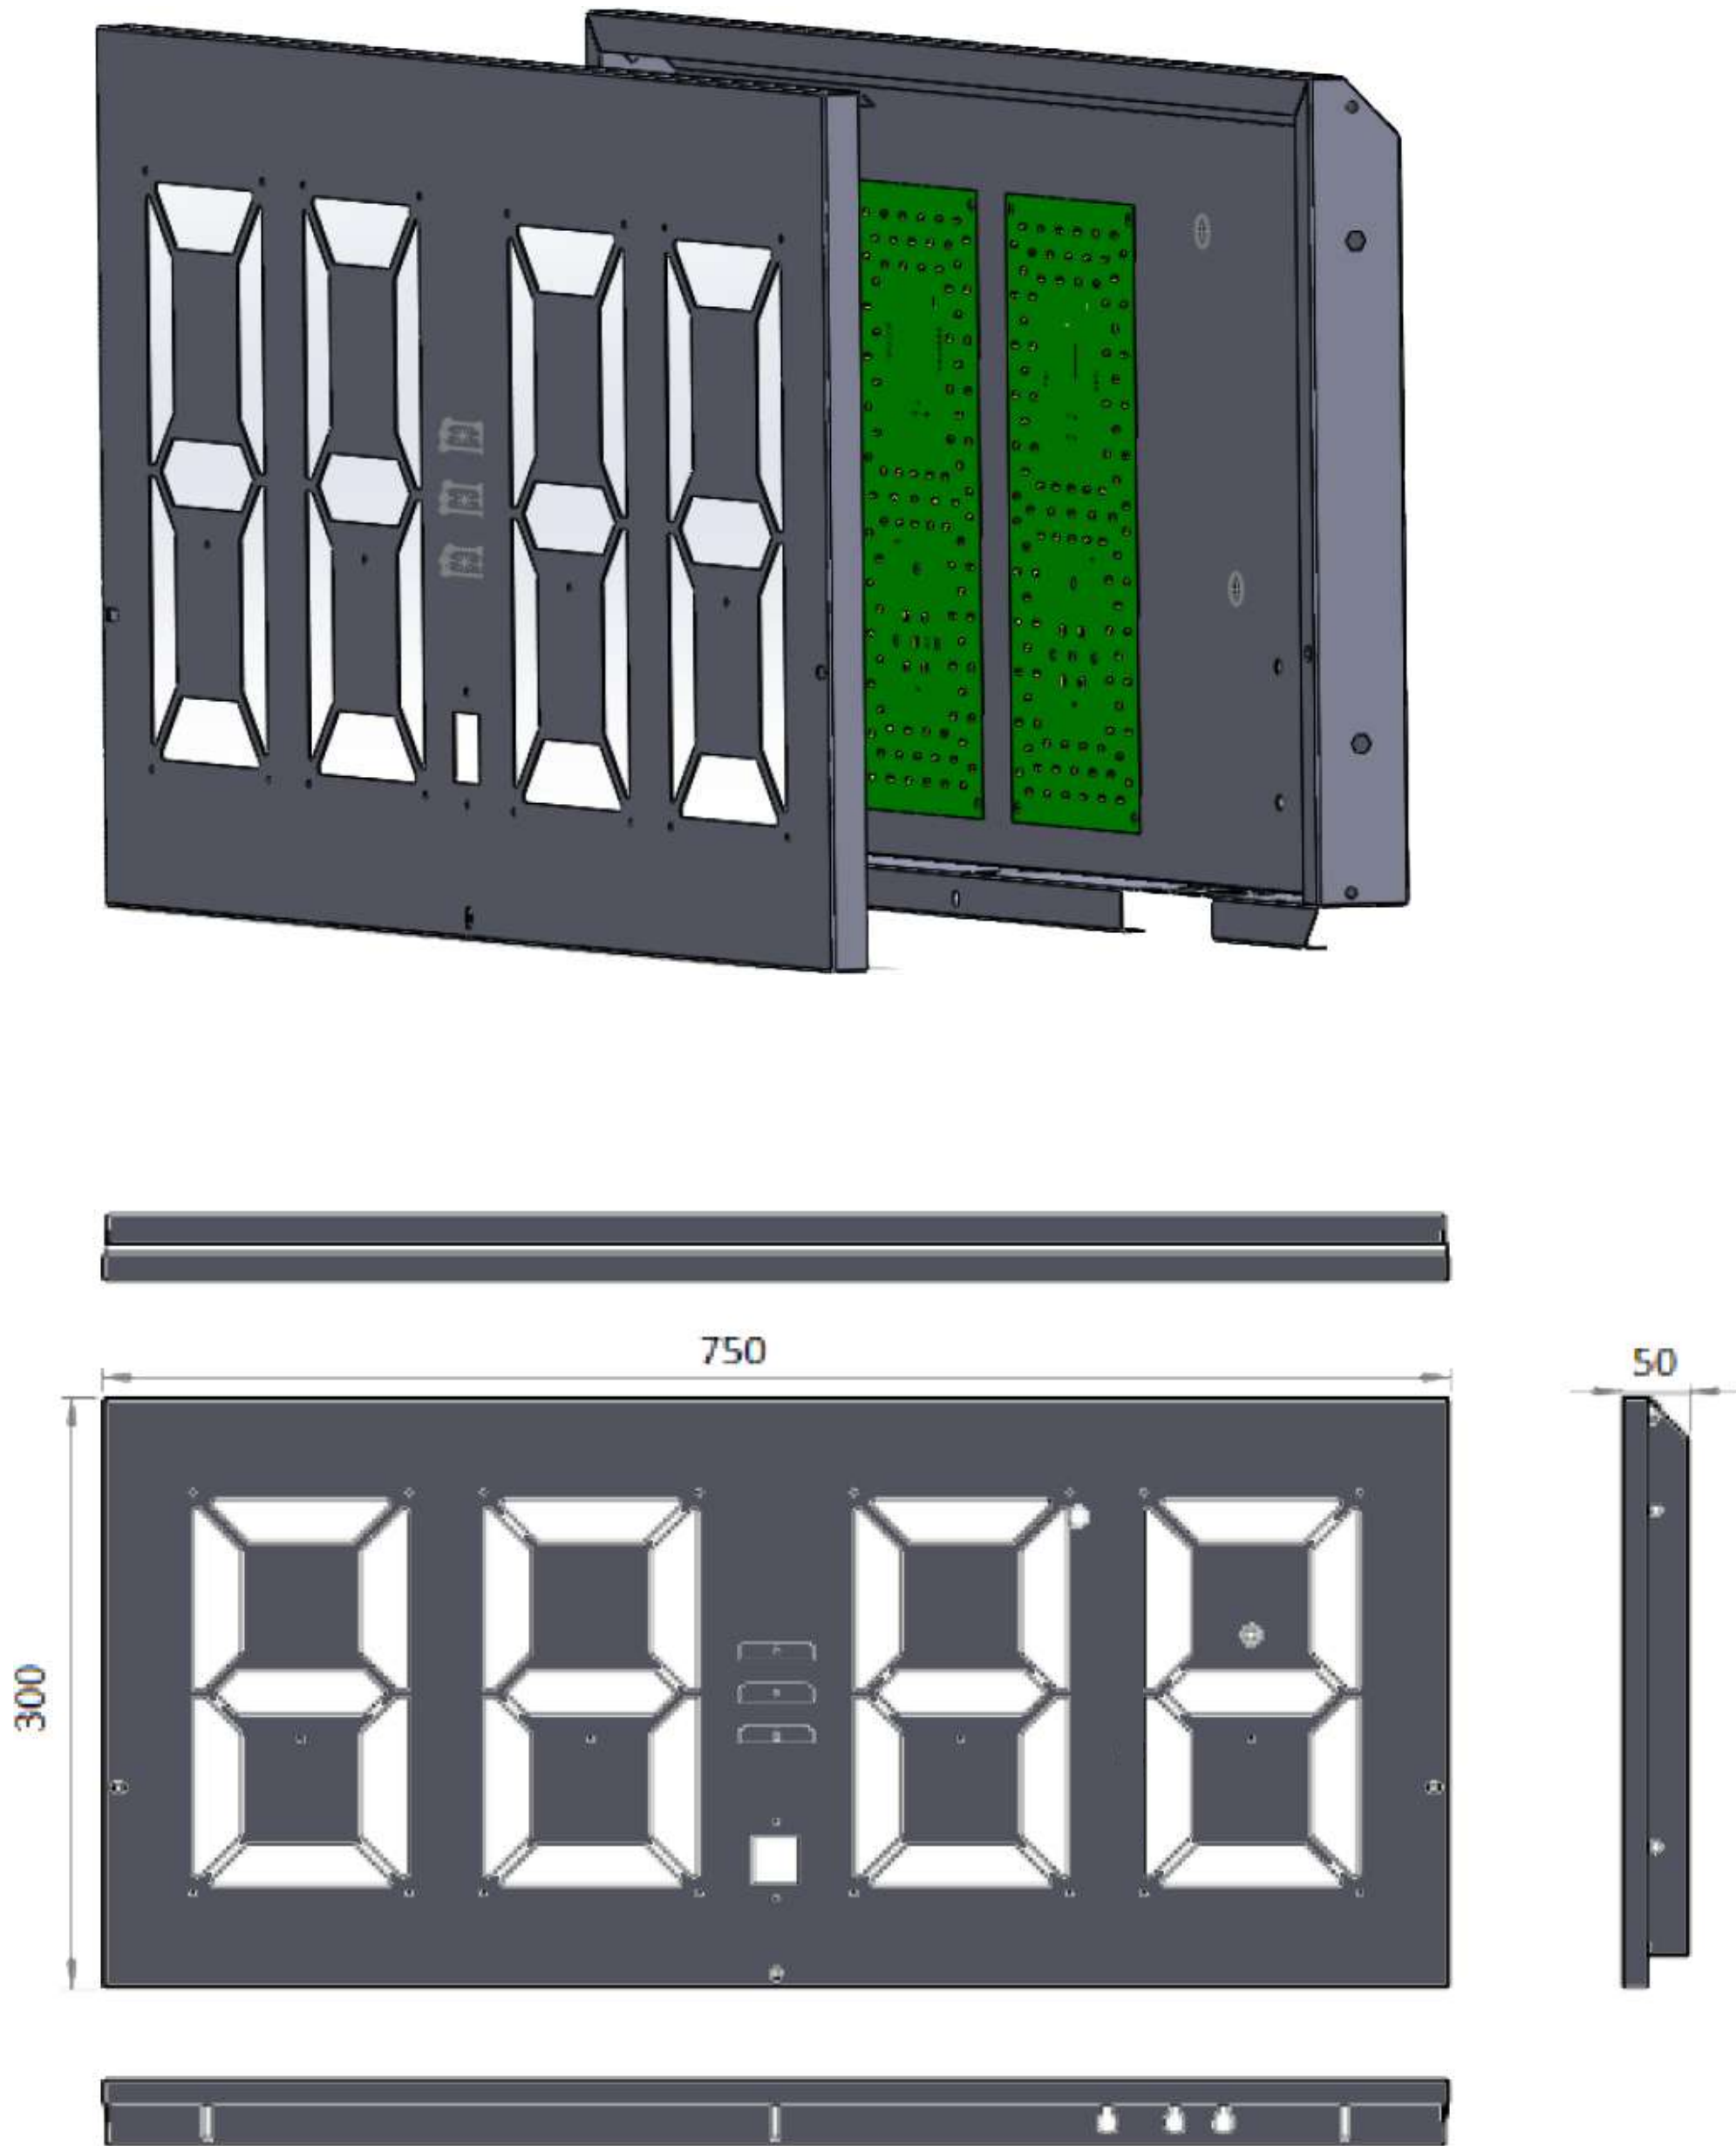


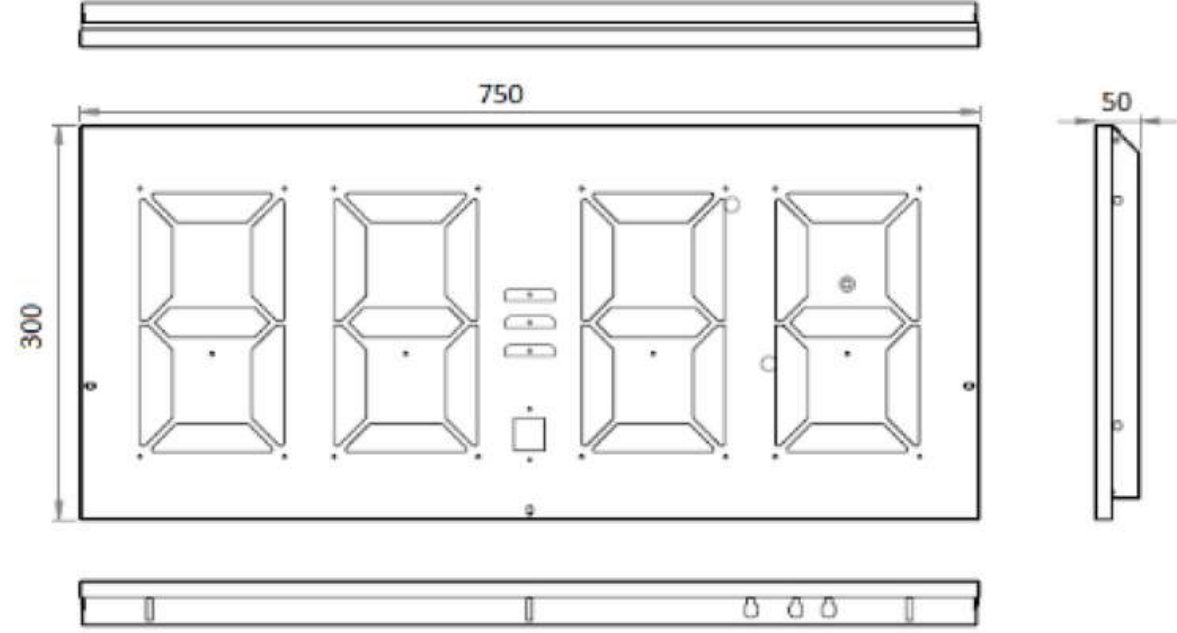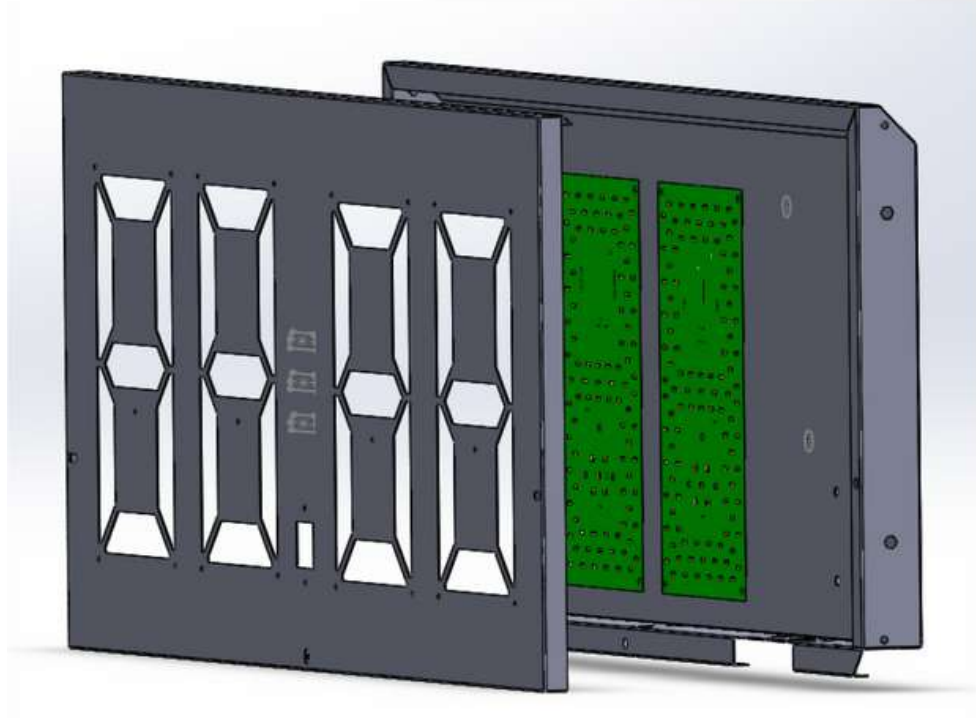



OPTIONS	SPECT	SIGN 750X300X50
INPUT	RATED INPUT VOLTAGE	220-240V AC
	RANGE OF INPUT VOLTAGE	110-240V AC
	FREQUENCY (Hz)	50/60 Hz
OUTPUT	PANEL SIZE (mm)	750X300X50
	DIGIT SIZE (mm)	230X127
	CCT	6500K
	CRI	80+
	BEAM ANGLE	120°
	POWER CONSUMPTION	<50W
	BRIGHTNESS ADJUSTMENT	% 10-100 DIM
	LED CHIP	CREE / SAMSUNG / SEOUL
	RATED LOAD	30W MAX
	ENVIROMENT	OPERATING AMBIENT TEMPERATURE
STORAGE TEMPERATURE		-40°C / +80°C
HUMIDITY		%10-90 RH
LIFE TIME (Hour)		50.000 @45°C
WARRANTY		5 YEARS



## ALXSYS 850X345

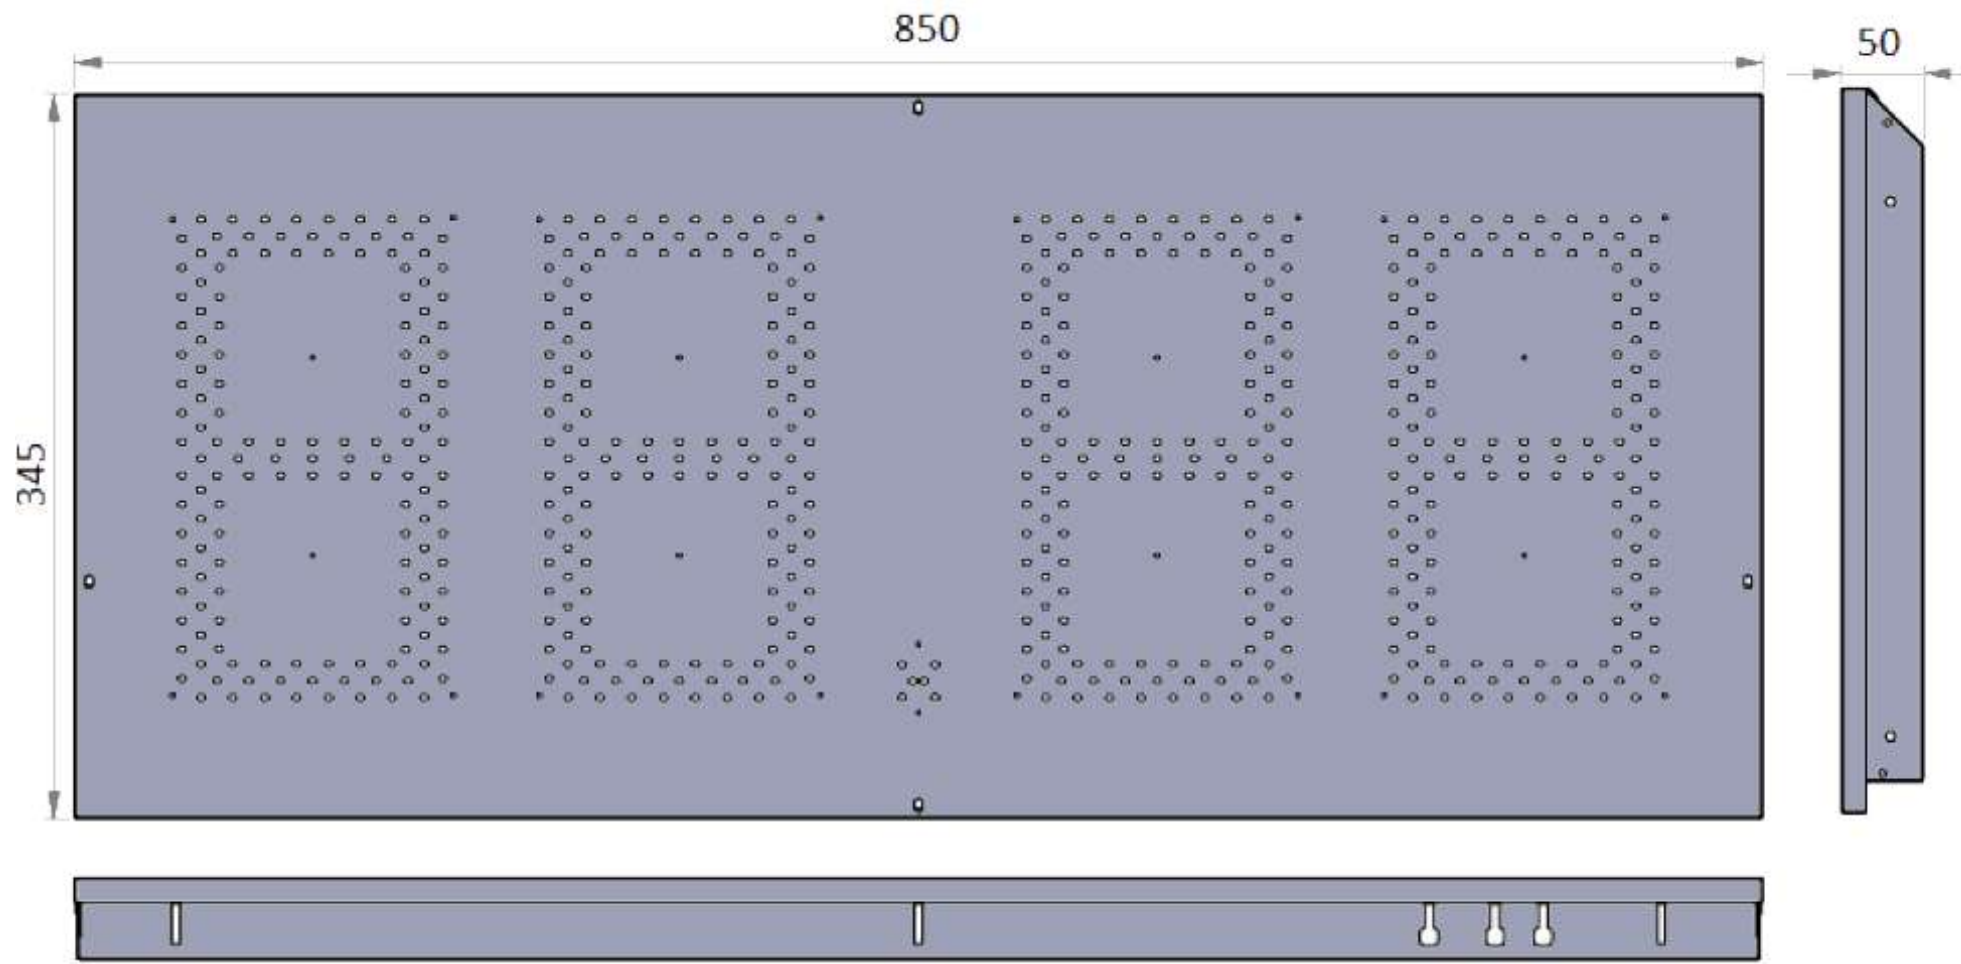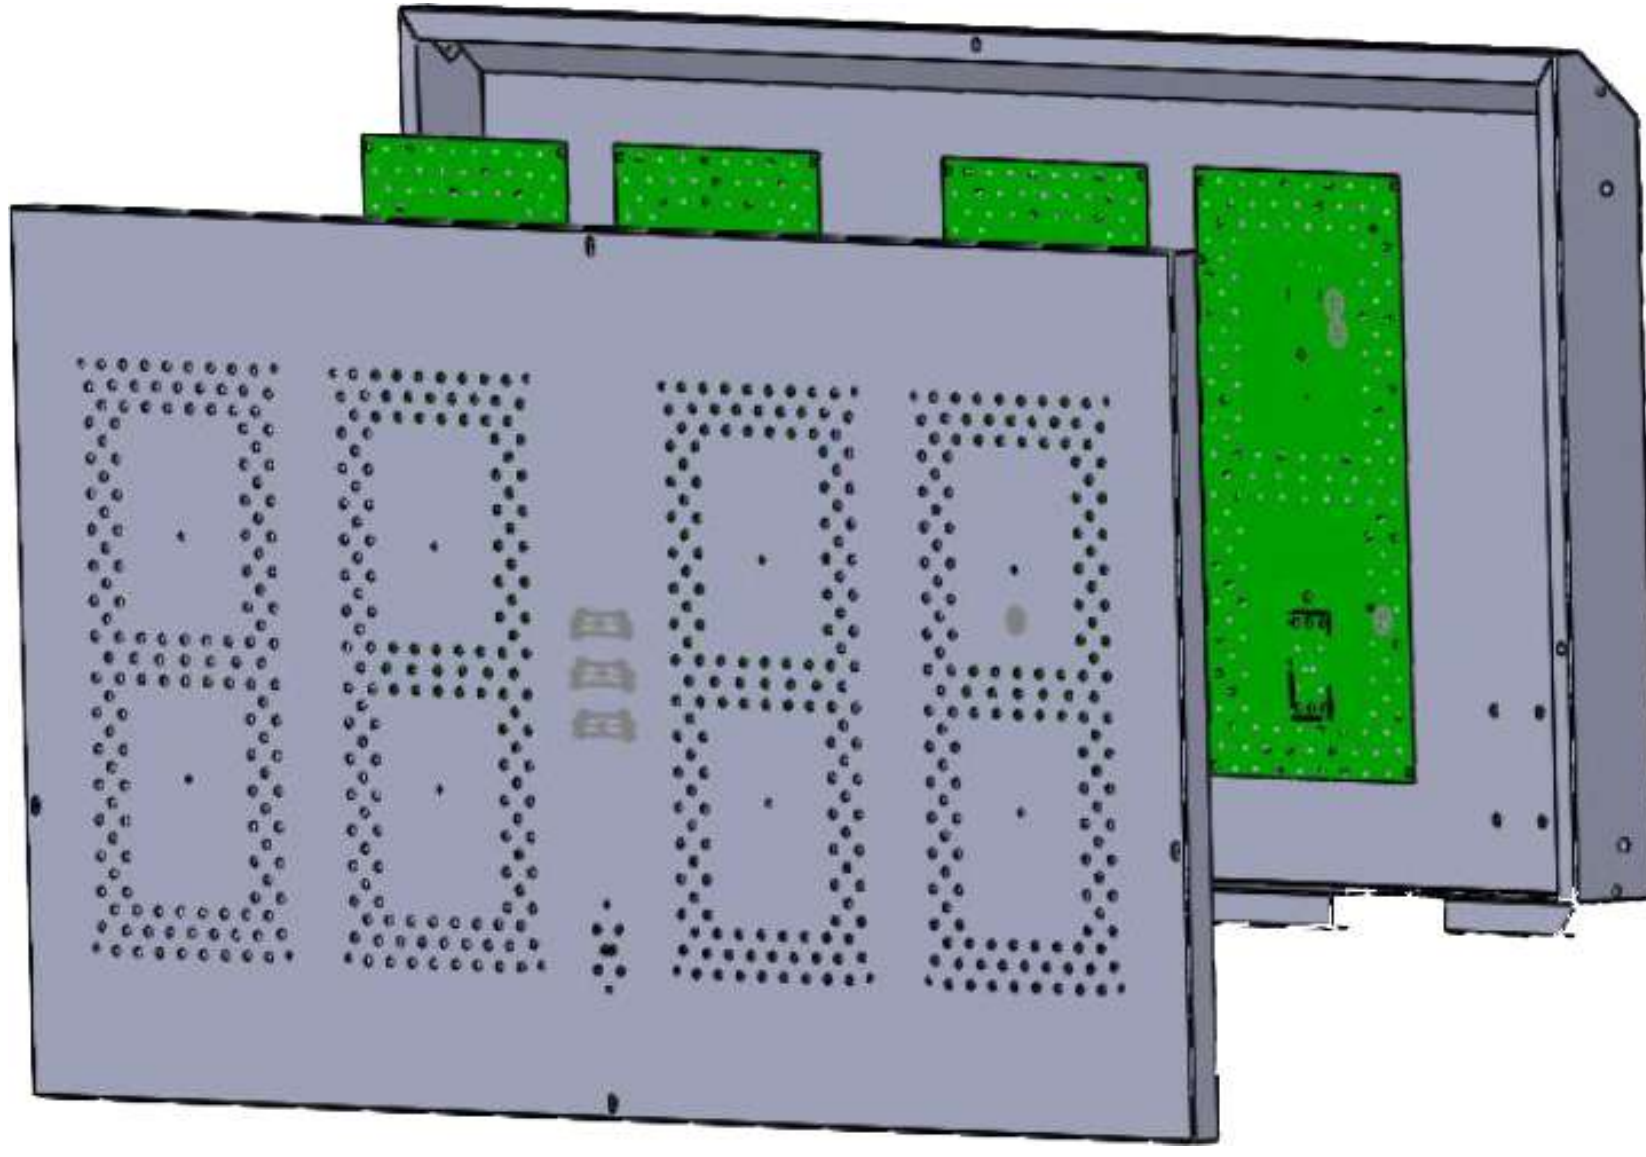





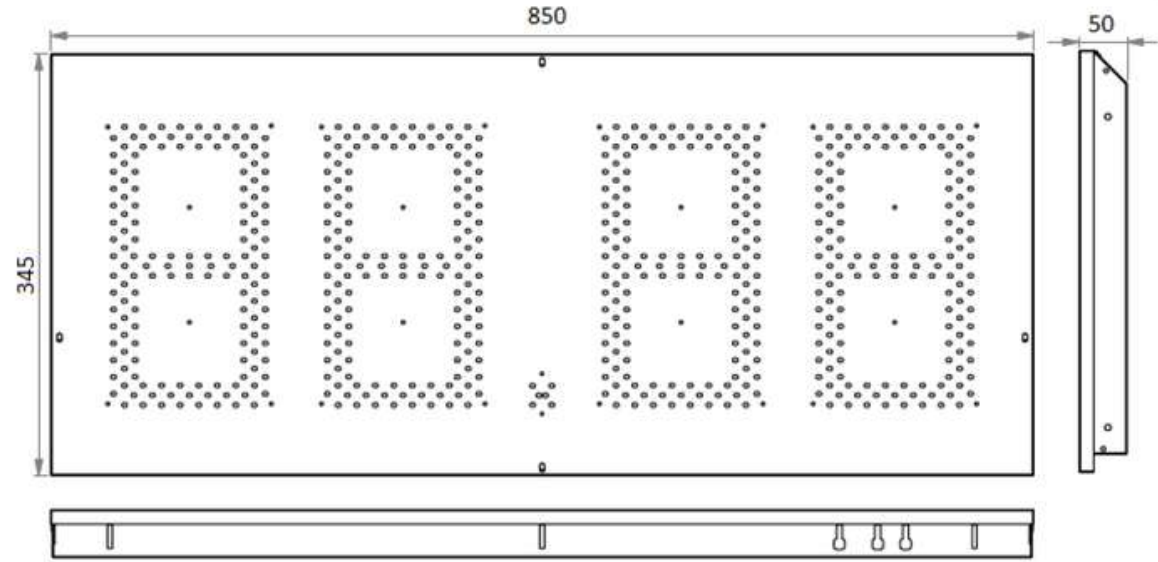
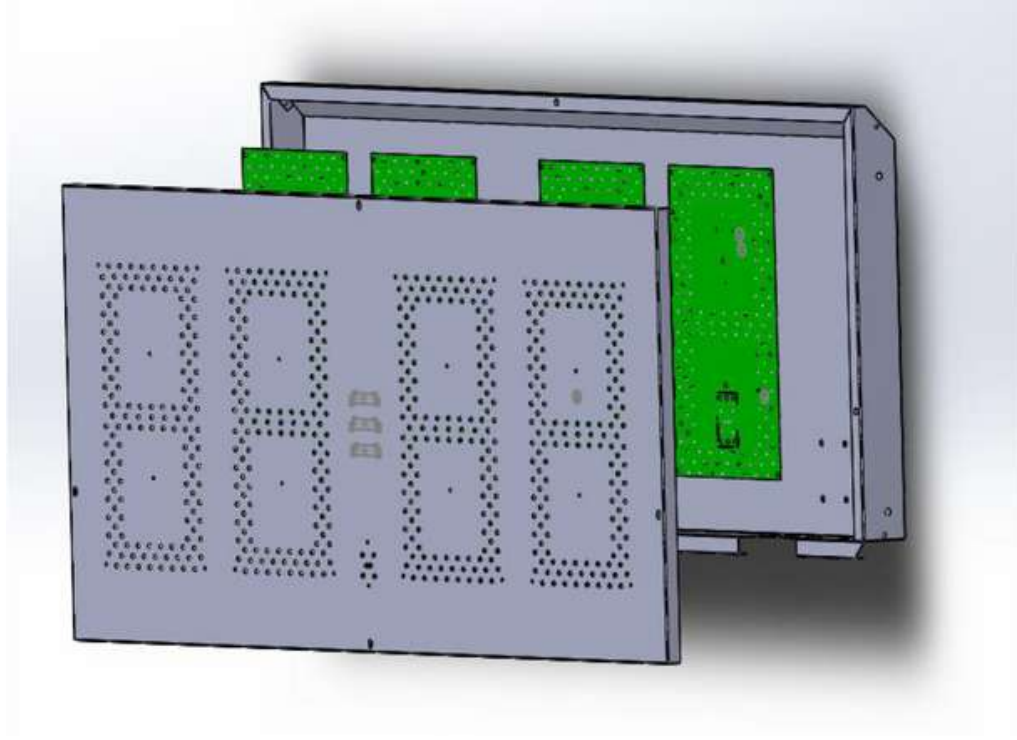


OPTIONS	SPECT	SIGN 850X345X50
INPUT	RATED INPUT VOLTAGE	220-240V AC
	RANGE OF INPUT VOLTAGE	110-240V AC
	FREQUENCY (Hz)	50/60 Hz
OUTPUT	PANEL SIZE (mm)	850X345X50
	DIGIT SIZE (mm)	296,80x165,05
	CCT	6500K
	CRI	80+
	BEAM ANGLE	120°
	POWER CONSUMPTION	<60W
	BRIGHTNESS ADJUSTMENT	% 10-100 DIM
	LED CHIP	CREE / SAMSUNG / SEOUL
	RATED LOAD	48W MAX
ENVIROMENT	OPERATING AMBIENT TEMPERATURE	-40°C / +80°C
	STORAGE TEMPERATURE	-40°C / +80°C
	HUMIDITY	%10-90 RH
	LIFE TIME (Hour)	50.000 @45°C
WARRANTY		5 YEARS



## ALXSYS 1020X480

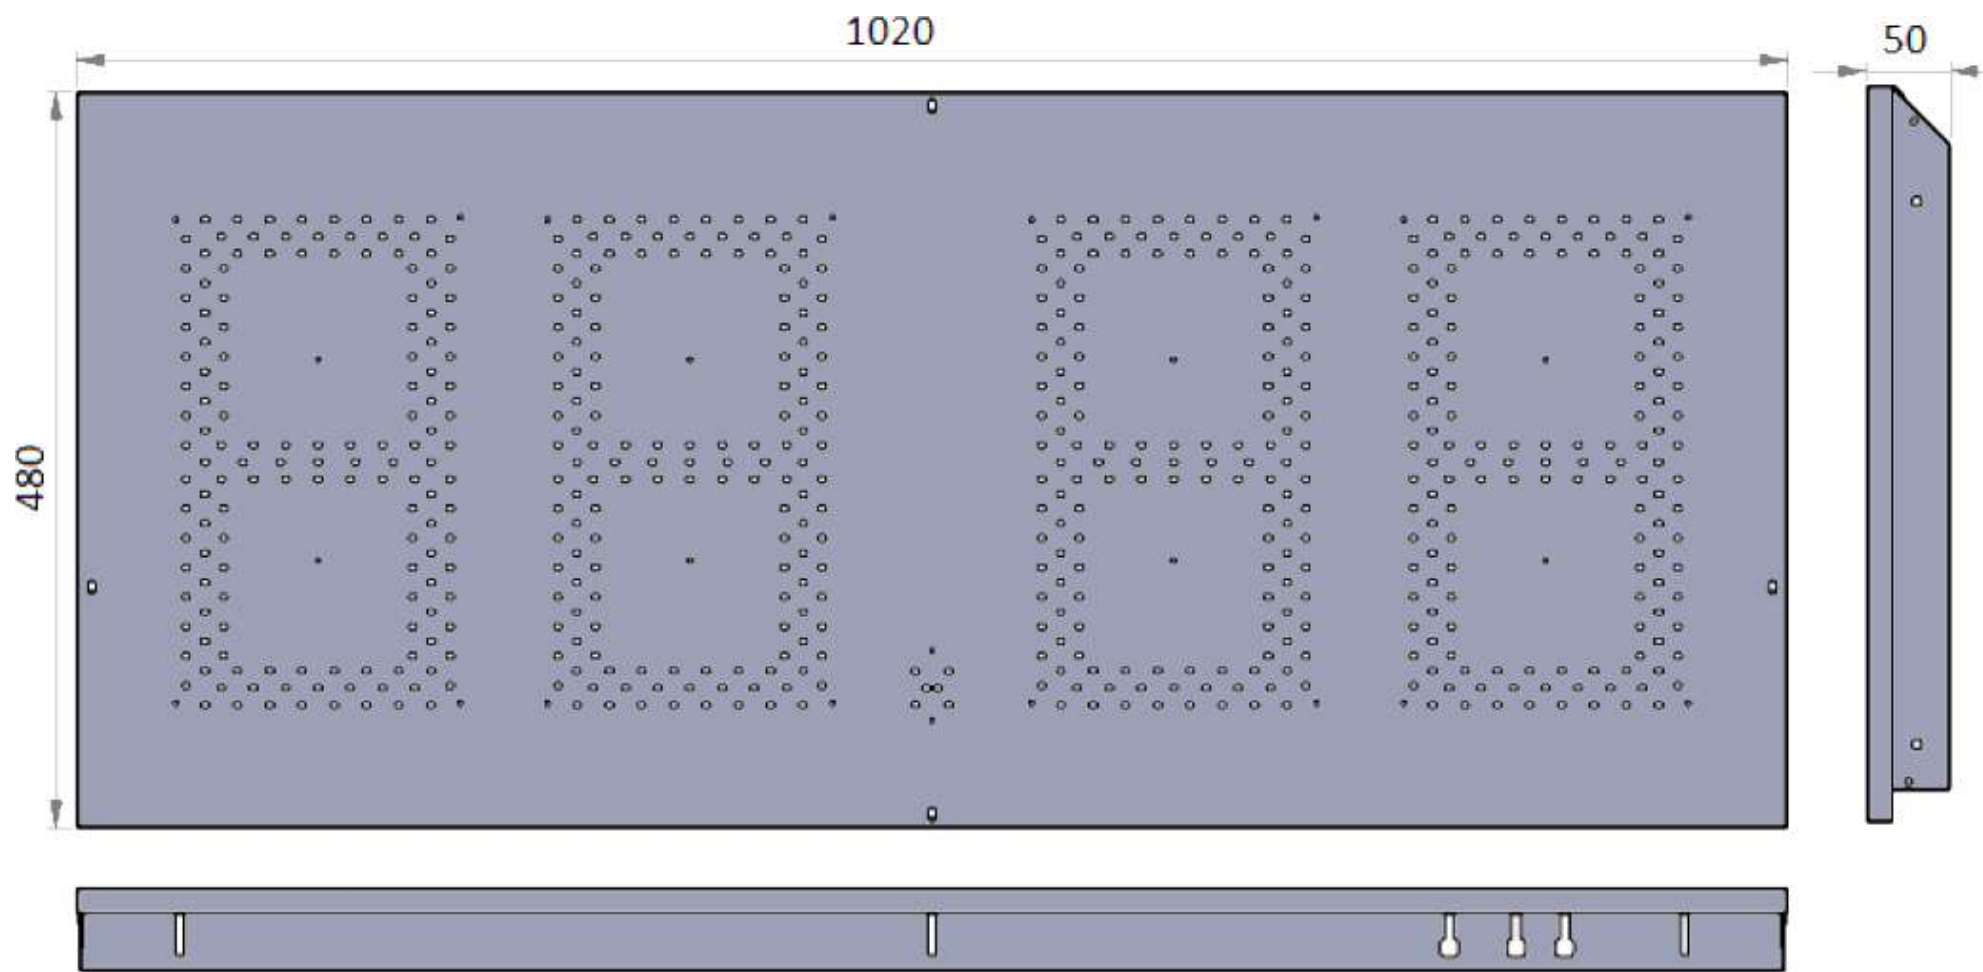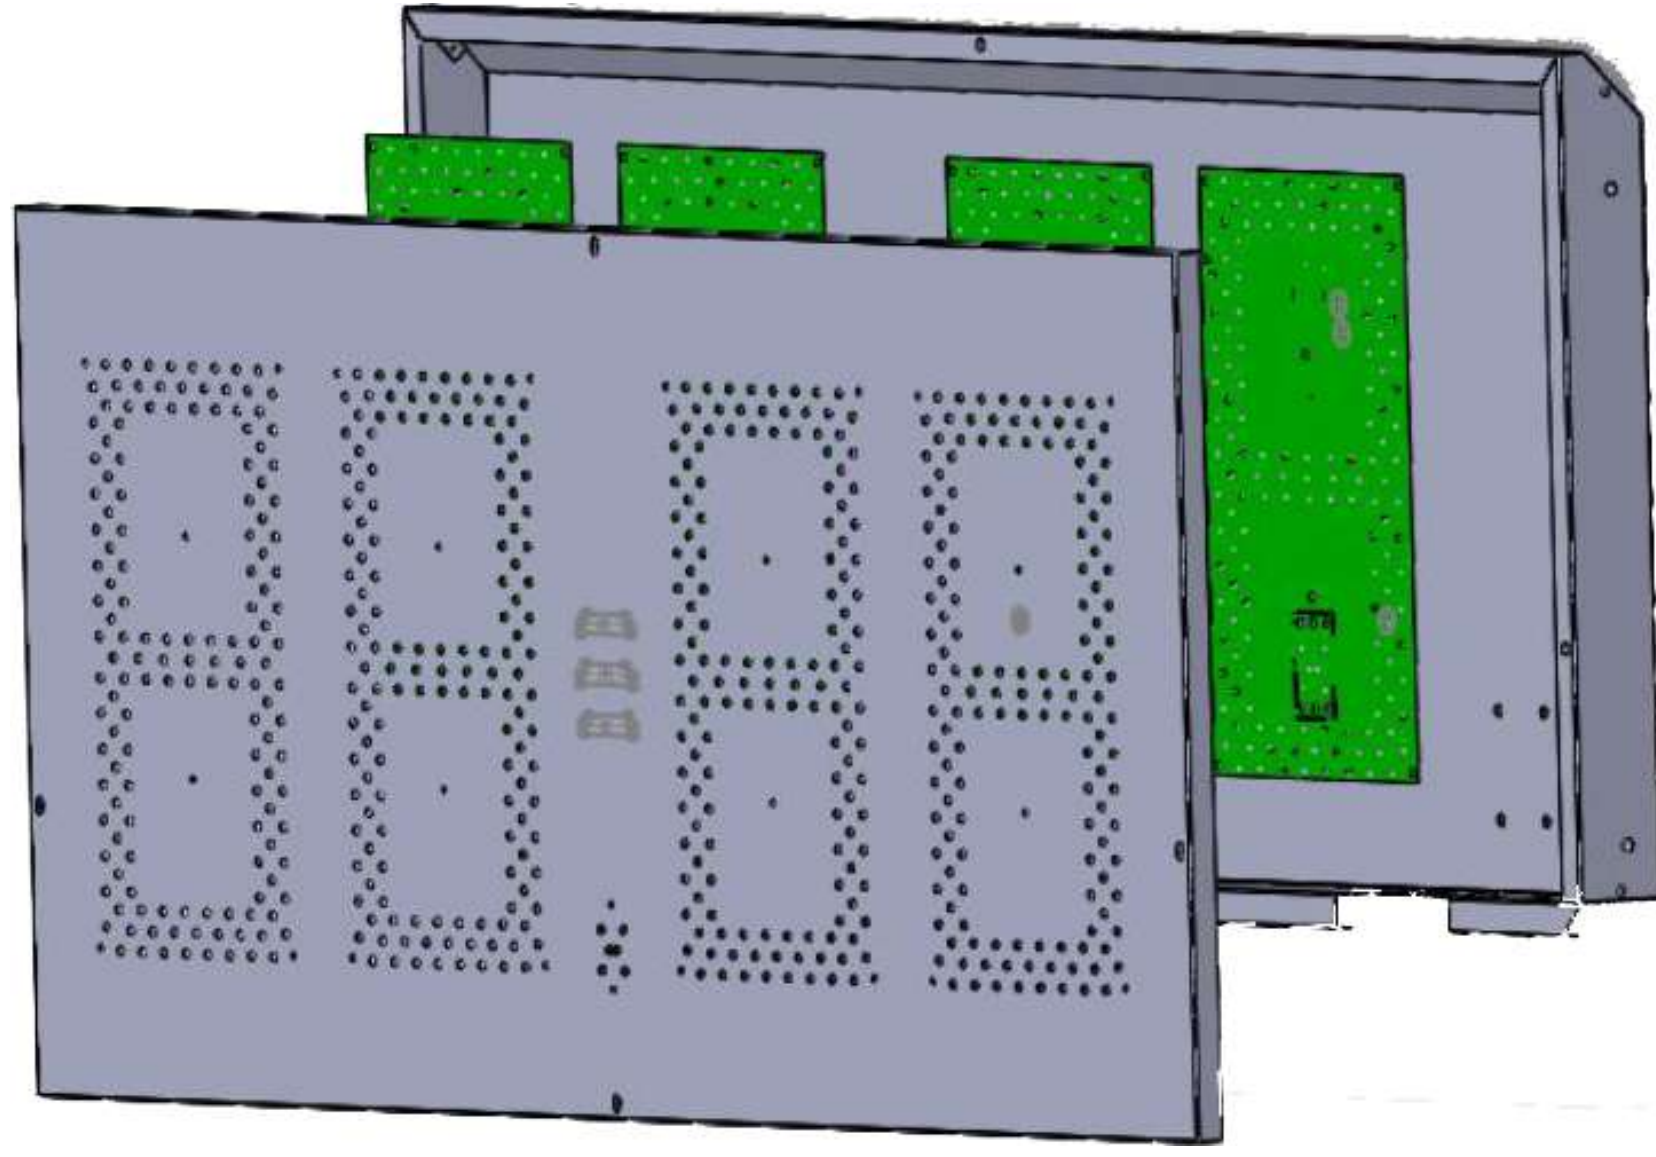


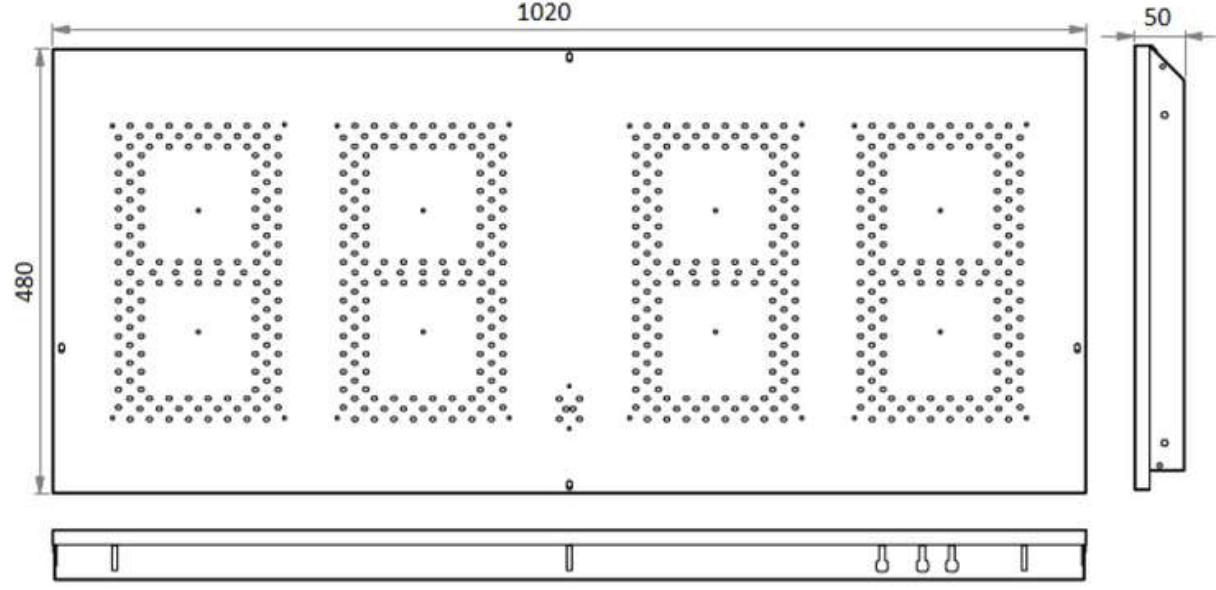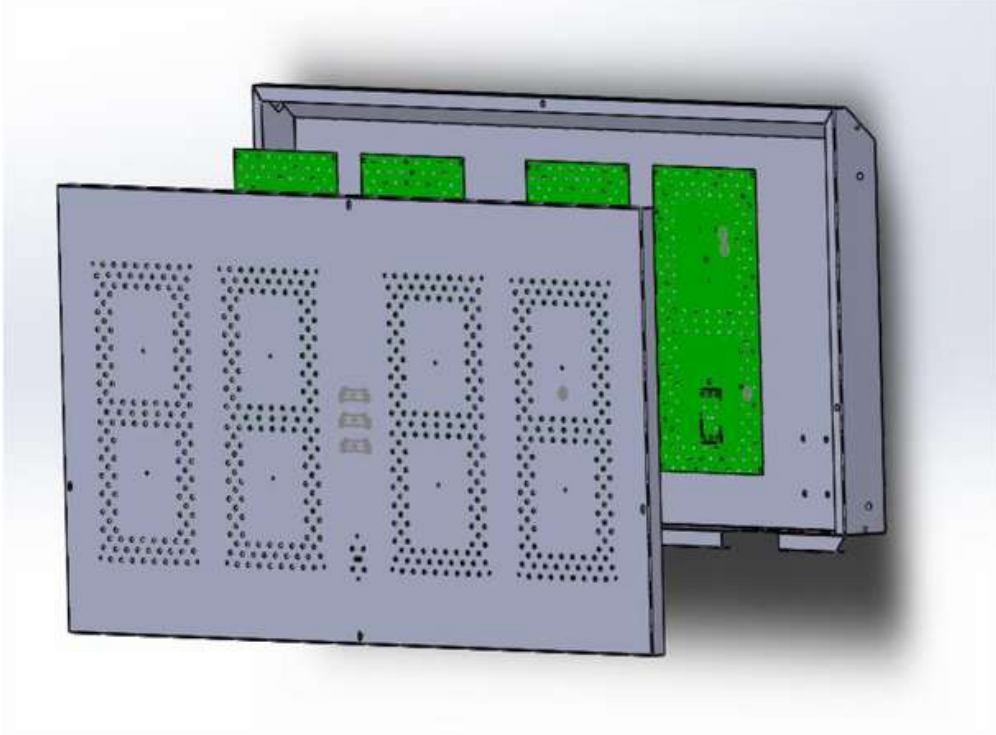

OPTIONS	SPECT	SIGN 1020X480X50
INPUT	RATED INPUT VOLTAGE	220-240V AC
	RANGE OF INPUT VOLTAGE	110-240V AC
	FREQUENCY (Hz)	50/60 Hz
OUTPUT	PANEL SIZE (mm)	1020x480X55
	DIGIT SIZE (mm)	296,80x165,05
	CCT	6500K
	CRI	80+
	BEAM ANGLE	120°
	POWER CONSUMPTION	<60W
	BRIGHTNESS ADJUSTMENT	% 10-100 DIM
	LED CHIP	CREE / SAMSUNG / SEOUL
	RATED LOAD	48W MAX
ENVIROMENT	OPERATING AMBIENT TEMPERATURE	-40°C / +80°C
	STORAGE TEMPERATURE	-40°C / +80°C
	HUMIDITY	%10-90 RH
	LIFE TIME (Hour)	50.000 @45°C
WARRANTY		5 YEARS




## ALXSYS 1020X1810

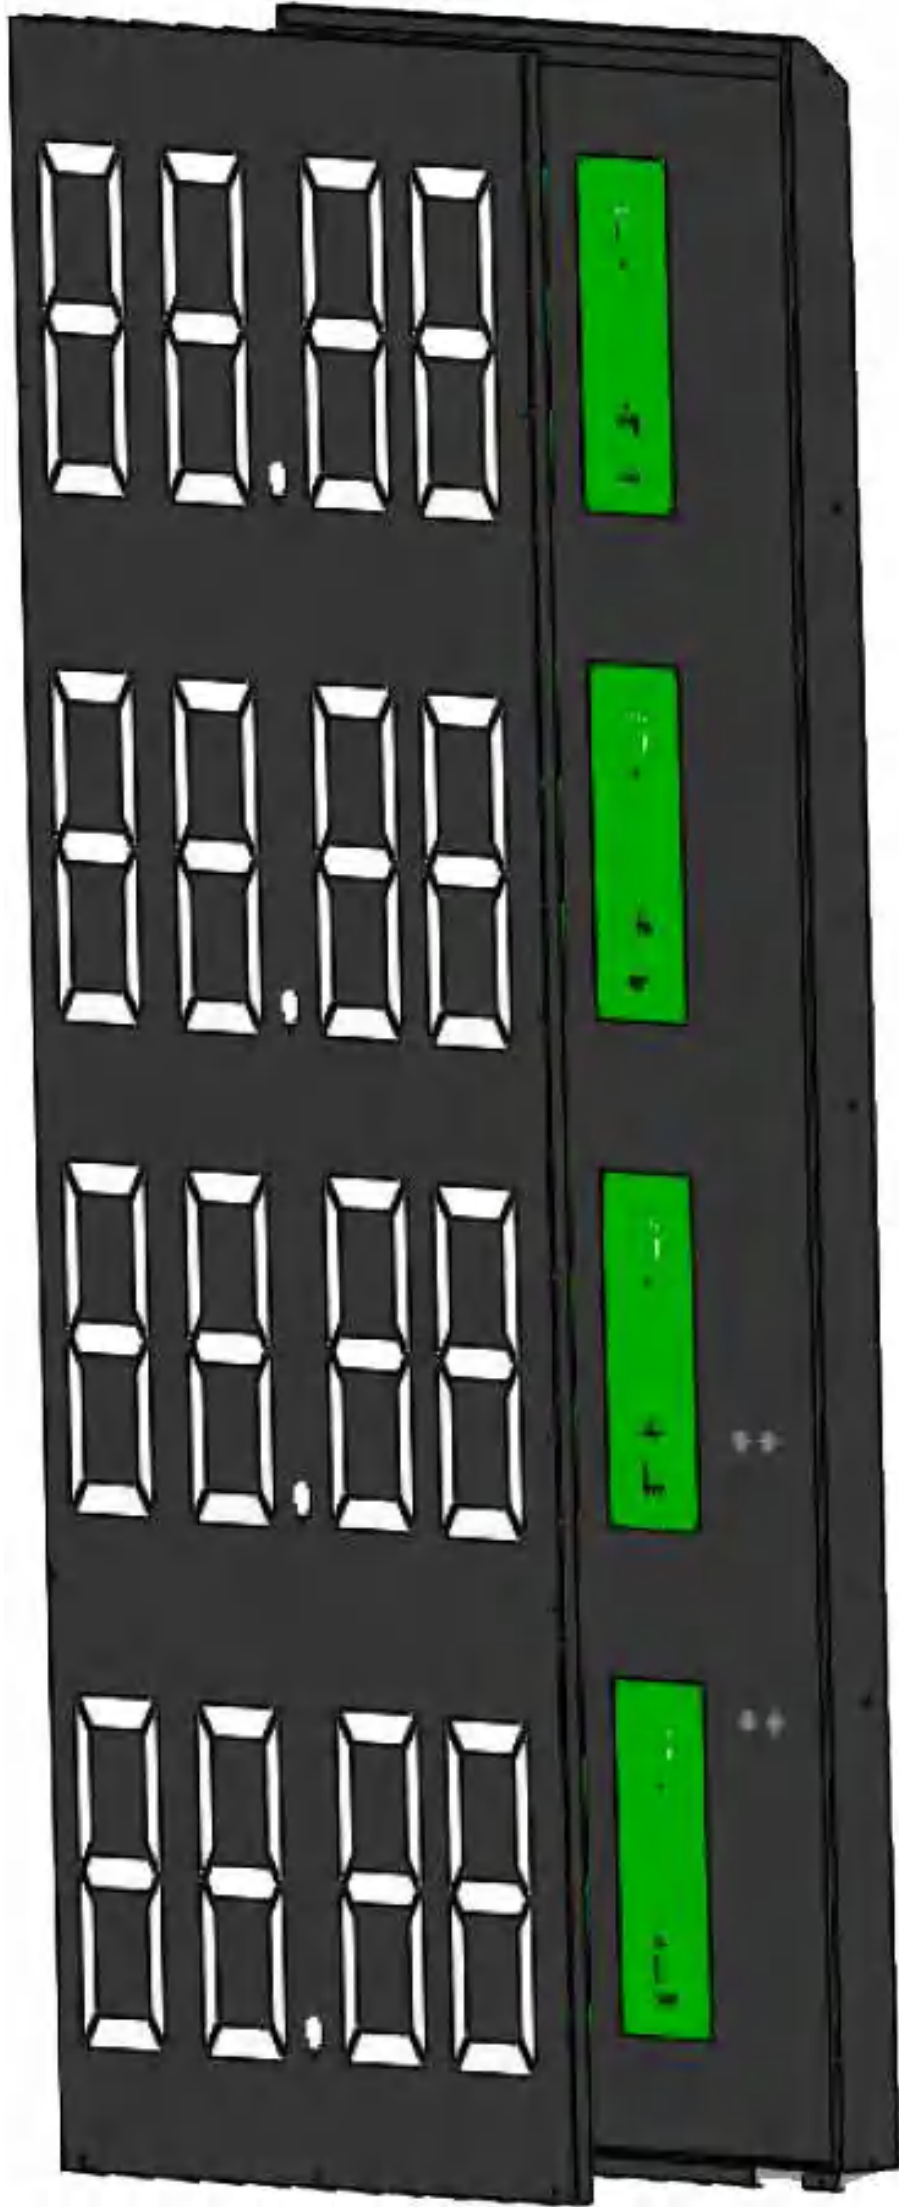


1810

1020

55

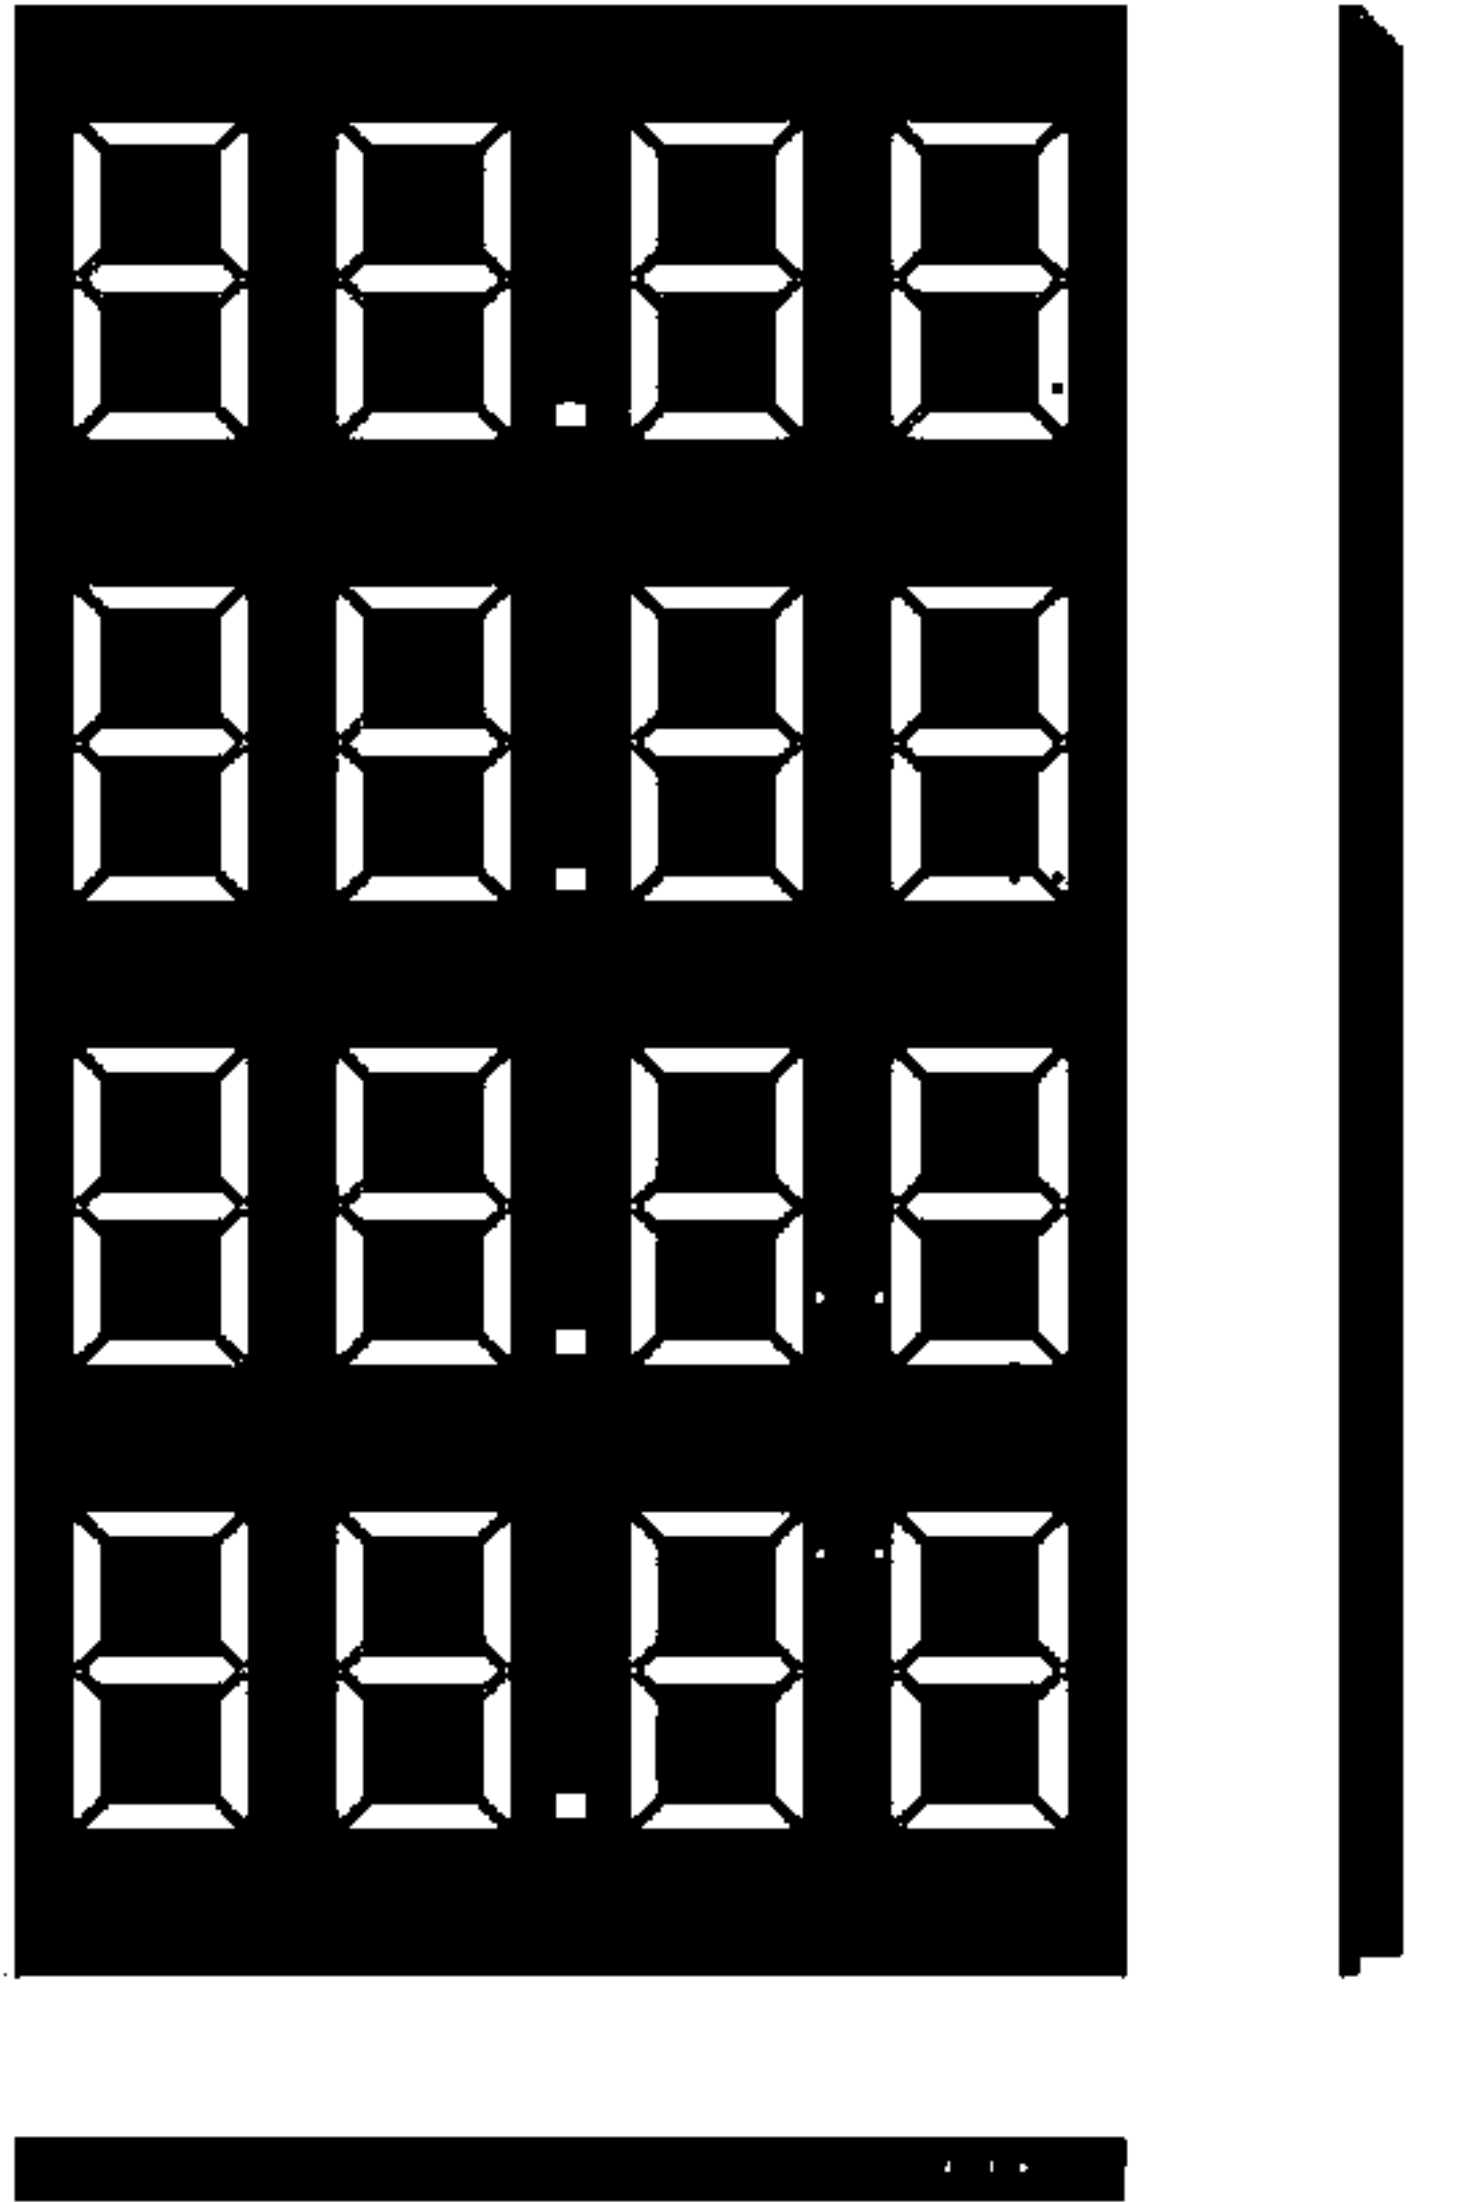

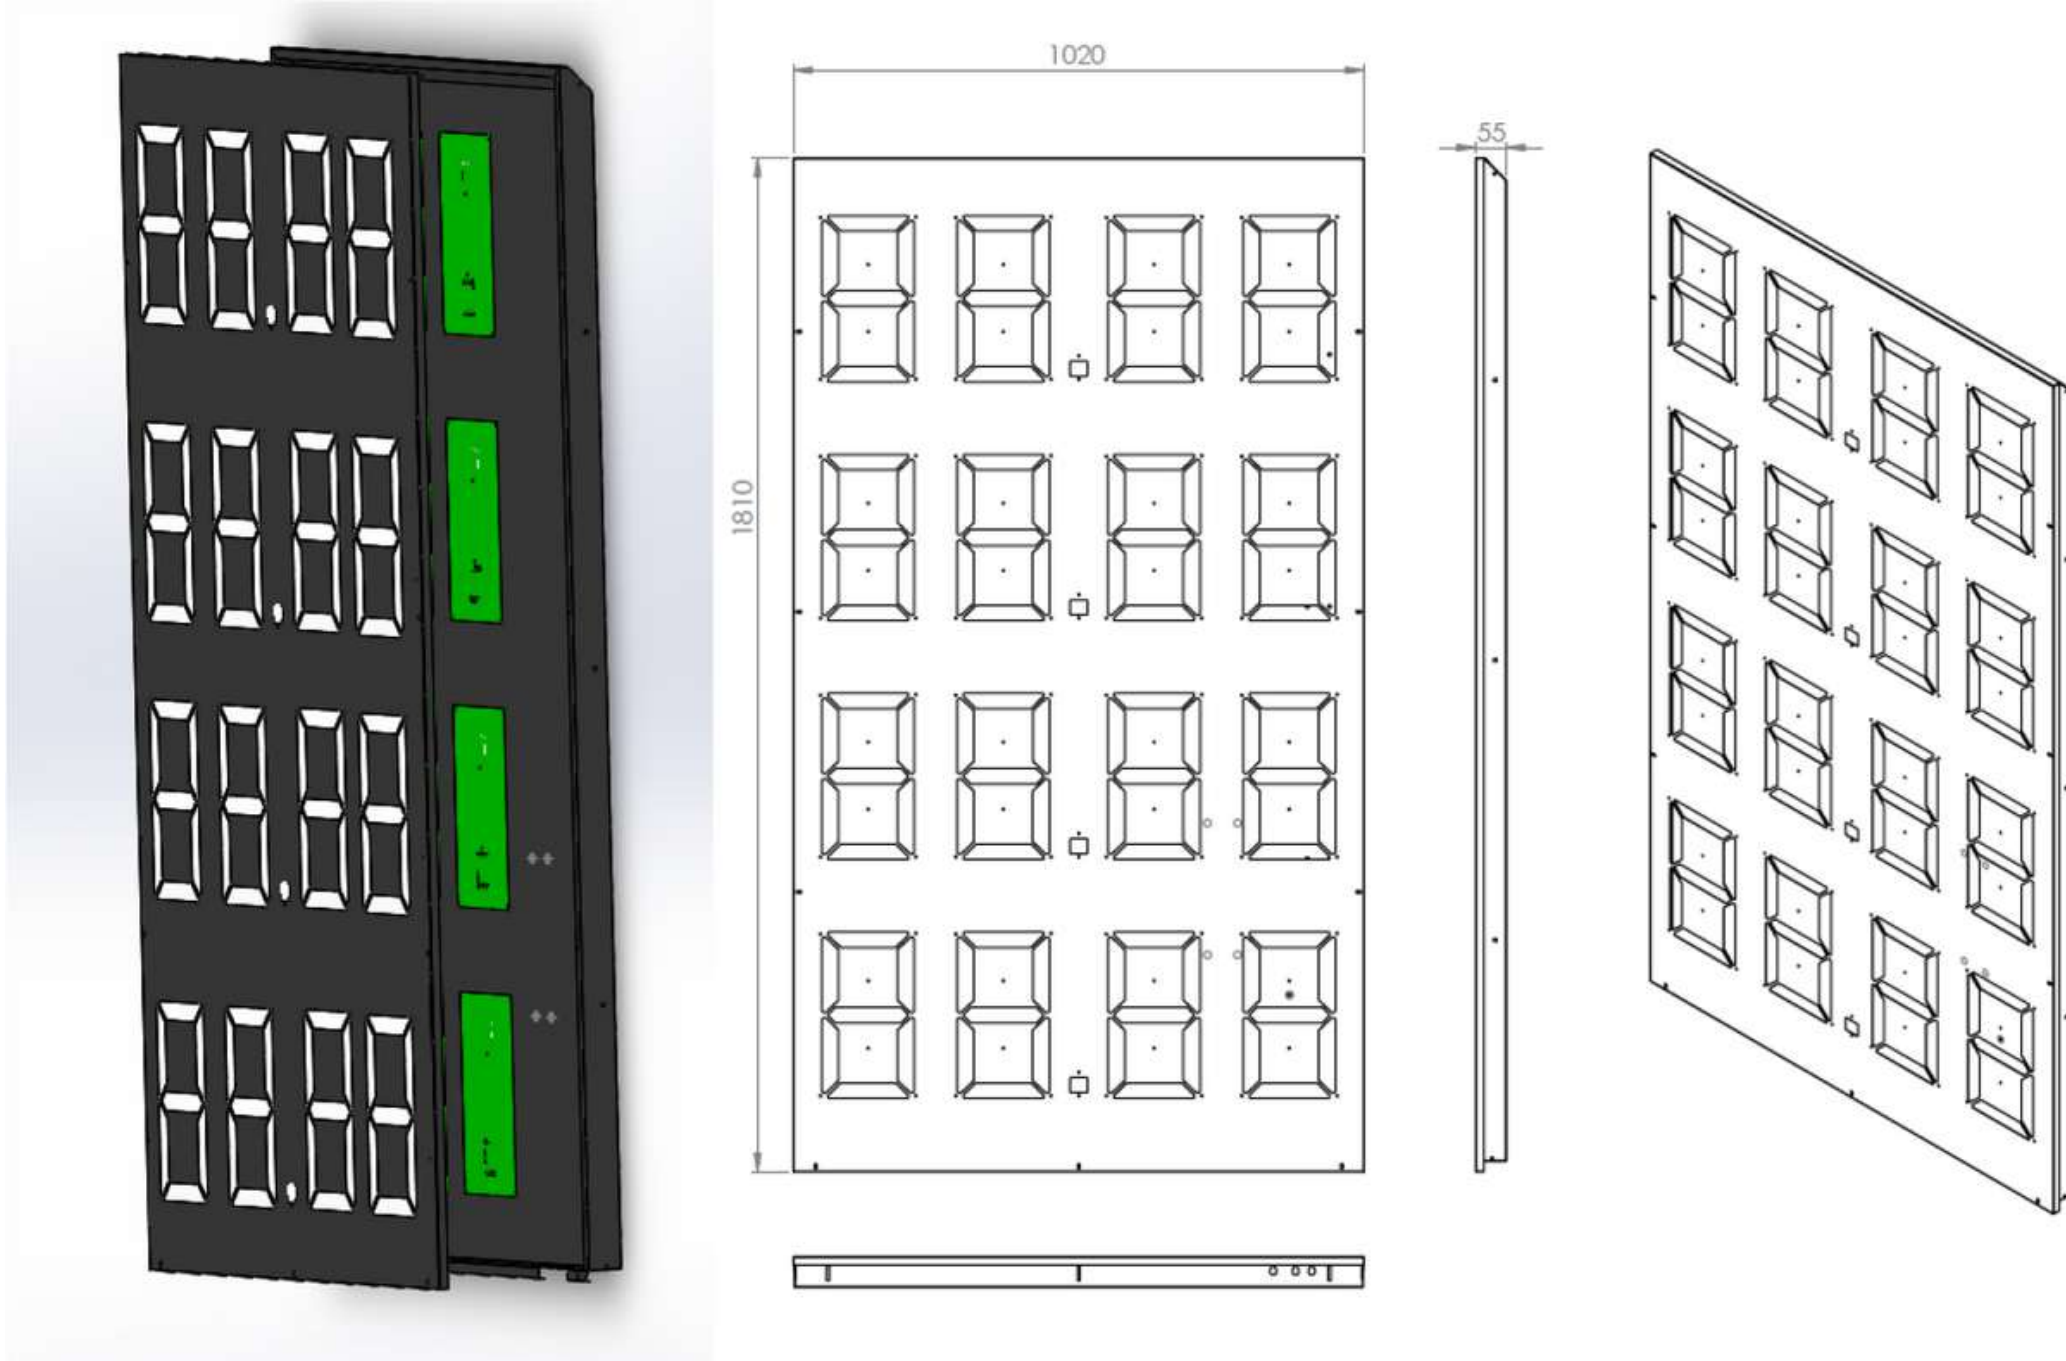

OPTIONS	SPECT	SIGN 1020X1810
INPUT	RATED INPUT VOLTAGE	220-240V AC
	RANGE OF INPUT VOLTAGE	110-240V AC
	FREQUENCY (Hz)	50/60 Hz
OUTPUT	PANEL SIZE (mm)	1020x1810x55
	DIGIT SIZE (mm)	296,80x165,05
	CCT	6500K
	CRI	80+
	BEAM ANGLE	120°
	POWER CONSUMPTION	<200W
	BRIGHTNESS ADJUSTMENT	% 10-100 DIM
	LED CHIP	CREE / SAMSUNG / SEOUL
	RATED LOAD	200W MAX
	ENVIROMENT	OPERATING AMBIENT TEMPERATURE
STORAGE TEMPERATURE		-40°C / +80°C
HUMIDITY		%10-90 RH
LIFE TIME (Hour)		50.000 @45°C
WARRANTY		5 YEARS



## ALXPOWERSYS 35W



MODEL	LPS35-12	LPS35-24	
OUTPUT	DC VOLTAGE	12V	24V
	RATED CURRENT	3A	1.5A
	CURRENT RANGE	0-3A	0-1.5A
	RATED POWER	35W	35W
	RIPPLE and NOISE	150mV	
	VOLTAGE TOLERANCE	±3.0%	±3.0%
	LINE REGULATION	±1.0%	±1.0%
	LOAD REGULATION	±0.5%	±0.5%
	HOLD UP TIME	50ms/230VAC 20ms/115VAC @FULL LOAD	
INPUT	VOLTAGE RANGE	90-264VAC	127-370VDC
	FREQUENCY RANGE	47-63Hz	
	EFFICIENCY (Typ.)	<87%	<89%
	AC CURRENT (Typ.)	1.1A/115VAC 0.7A/230VAC	
	INRUSH CURRENT(Typ.)	COLD START 55A(twidth=510µs measured at 50% Ipeak) at 230VAC	
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	4 units (circuit breaker of type B) / 9 units (circuit breaker of type C) at 230VAC	
	LEAKAGE CURRENT	0.25mA / 240VAC	
PROTECTION	OVERLOAD	110 ~ 130% rated output power	
	OVER VOLTAGE	13.8 ~ 16.2V	27.6 ~ 32.4V
		recovers automatically after fault condition is removed	
	OVER TEMP.	+80°C	
		recovers automatically after fault condition is removed	
	SHORT CIRCUITS	PROTECTED	
recovers automatically after fault condition is removed			
ENVIRONMENT	WORKING TEMP.	-30 ~ +65°C (Refer to "Derating Curve")	
	WORKING HUMIDITY	20 ~ 90% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH	
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes	
SAFETY & EMC	WITHSTAND VOLTAGE	I/P-O/P:3KVAC	
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25°C/ 70% RH	
	EMC EMISSION	EN55032 Class B,EN61000-3-2 Class A,EN61000-3-3	
	EMC IMMUNITY	EN61000-4-2,3,4,5,6,8,11	
OTHERS	DIMENSION	135*36*31 (L*W*H)	
	PACKING	0,190Kg: 50pcs / 9,5KG 325*235*180 mm. (L*W*H) 0,0138 m <sup>3</sup>	



## ALXPOWERSYS 60W





MODEL	LPS60-12	LPS60-24	
OUTPUT	DC VOLTAGE	12V	24V
	RATED CURRENT	5A	2.5A
	CURRENT RANGE	0-5A	0-2.5A
	RATED POWER	60W	60W
	RIPPLE and NOISE	150mV	
	VOLTAGE TOLERANCE	±3.0%	±3.0%
	LINE REGULATION	±1.0%	±1.0%
	LOAD REGULATION	±0.5%	±0.5%
	HOLD UP TIME	50ms/230VAC 20ms/115VAC @FULL LOAD	
INPUT	VOLTAGE RANGE	90-264VAC	127-370VDC
	FREQUENCY RANGE	47-63Hz	
	EFFICIENCY (Typ.)	<85%	<88%
	AC CURRENT (Typ.)	1.1A/115VAC 0.7A/230VAC	
	INRUSH CURRENT(Typ.)	COLD START 55A(twidth=510µs measured at 50% Ipeak) at 230VAC	
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	4 units (circuit breaker of type B) / 7 units (circuit breaker of type C) at 230VAC	
	LEAKAGE CURRENT	0.25mA / 240VAC	
	PROTECTION	OVERLOAD	110 ~ 130% rated output power
OVER VOLTAGE		13.8 ~ 16.2V	27.6 ~ 32.4V
		recovers automatically after fault condition is removed	
OVER TEMP.		+80°C	
		recovers automatically after fault condition is removed	
SHORT CIRCUITS	PROTECTED recovers automatically after fault condition is removed		
ENVIRONEMENT	WORKING TEMP.	-30 ~ +65°C (Refer to "Derating Curve")	
	WORKING HUMIDITY	20 ~ 90% RH non-condensing	
	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH	
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes	
SAFETY & EMC	WITHSTAND VOLTAGE	I/P-O/P:3KVAC	
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms / 500VDC / 25°C/ 70% RH	
	EMC EMISSION	EN55032 Class B,EN61000-3-2 Class A,EN61000-3-3	
	EMC IMMUNITY	EN61000-4-2,3,4,5,6,8,11	
OTHERS	DIMENSION	160*36*31 (L*W*H)	
	PACKING	0,280Kg: 50pcs / 14KG 370*230*180 mm. (L*W*H) D,01532 m <sup>3</sup>	



## ALXSYS P6



EV&OFİS AYDINLATMA  
HOME&OFFICE  
LIGHTING




MAĞAZA AYDINLATMA  
RETAIL SHOPS LIGHTING



DEKORATİF AYDINLATMA  
(iç mekan - dış mekan)  
DECORATIVE LIGHTING  
(indoor - outdoor)



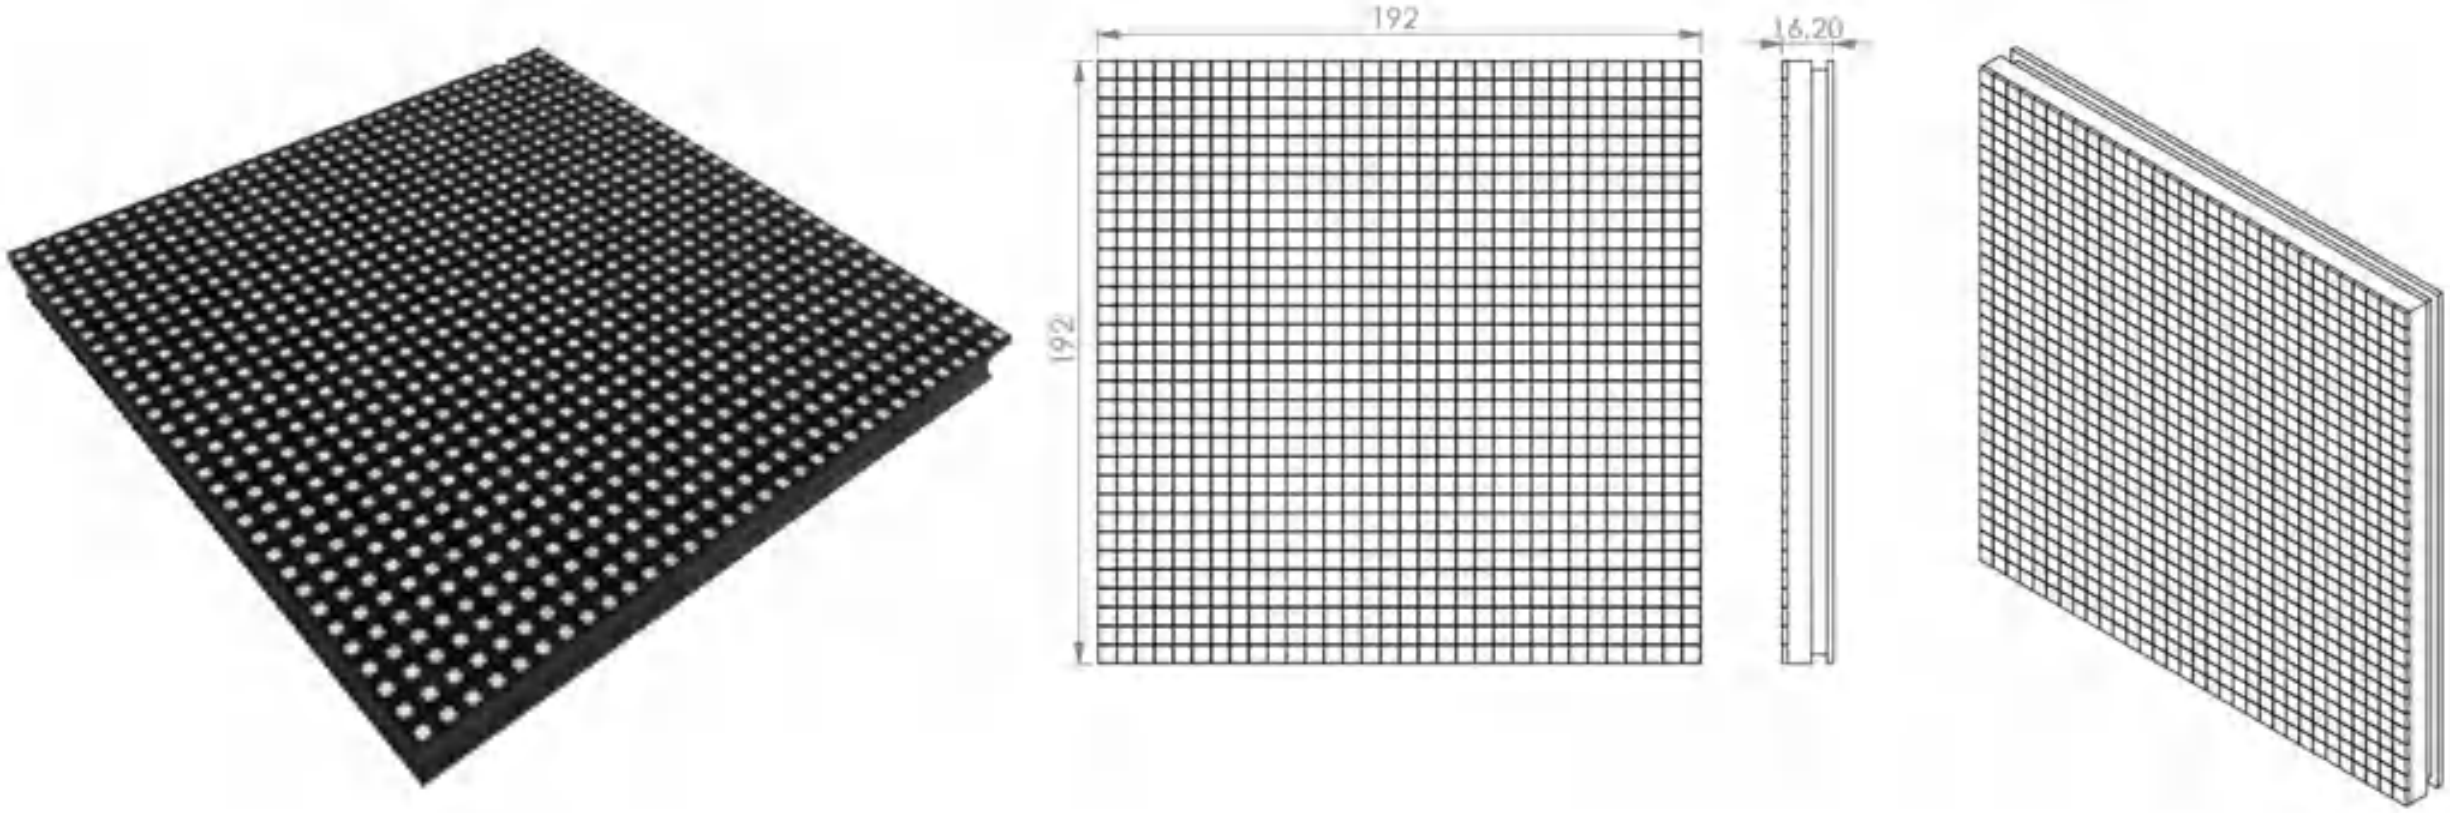

<b>SPECT</b>	<b>P6</b>
<b>DIMENSION W/H/L (mm)</b>	192 / 192 / 16,20
<b>PIXEL PITCH (mm)</b>	6
<b>PIXEL DENSITY (m<sup>2</sup>)</b>	27777
<b>PIXEL CONFIGURATION</b>	R-G-B
<b>PIXEL RESOLUTION (W/H)</b>	32 / 32
<b>WORKING TEMPERATURE</b>	-20°C / +80°C
<b>PANEL POWER SUPPLY</b>	5V
<b>MAX POWER</b>	28W
<b>AVERAGE POWER</b>	9W
<b>HUB CONNECTION</b>	HUB75
<b>DRIVING DEVICE</b>	DP5125IC
<b>DRIVE TYPE</b>	1/8 SCANNING
<b>REFRESH FREQUENCY (Hz)</b>	1920
<b>DISPLAY COLOUR</b>	4096 / 4096 / 4096
<b>BRIGHTNESS (cd / m<sup>2</sup>)</b>	5000
<b>COMMUNICATION DISTANCE (m)</b>	<100

## ALXSYS REMOTE CONTROLLER





<b>MODEL /SIZE</b>	V3
<b>BATTERY CAPACITY</b>	4.2V 350mAh
<b>CHARGING VOLTAGE</b>	5V
<b>CHARGING CURRENT</b>	200mA
<b>USER INTERFACE</b>	128x64 Pixel Display
<b>DATA COMMUNICATION</b>	2.4 GHz RF Transceiver, Remote Contoller with Wire



## ALXSYS SIGN V3 MID CONTROL WIFI




# ARGESYS LIGHT

ALXSYS SIGN  
V3 MID CONTROL WIFI



<b>MODEL /SIZE</b>	V3
<b>WORKING VOLTAGE</b>	220 VAC
<b>POWER CONSUMPTION</b>	1W
<b>USER INTERFACE</b>	128x64 Pixel Display
<b>DATA COMMUNICATION</b>	2.4 GHz RF Transceiver, Remote Contoller with Wire, RS485(OPT), RS232(OPT)
<b>PANEL DRIVING CAPACITY</b>	2x8 Panel ( 8 Panel in a Side)

## CONNECTION SCHEMA:

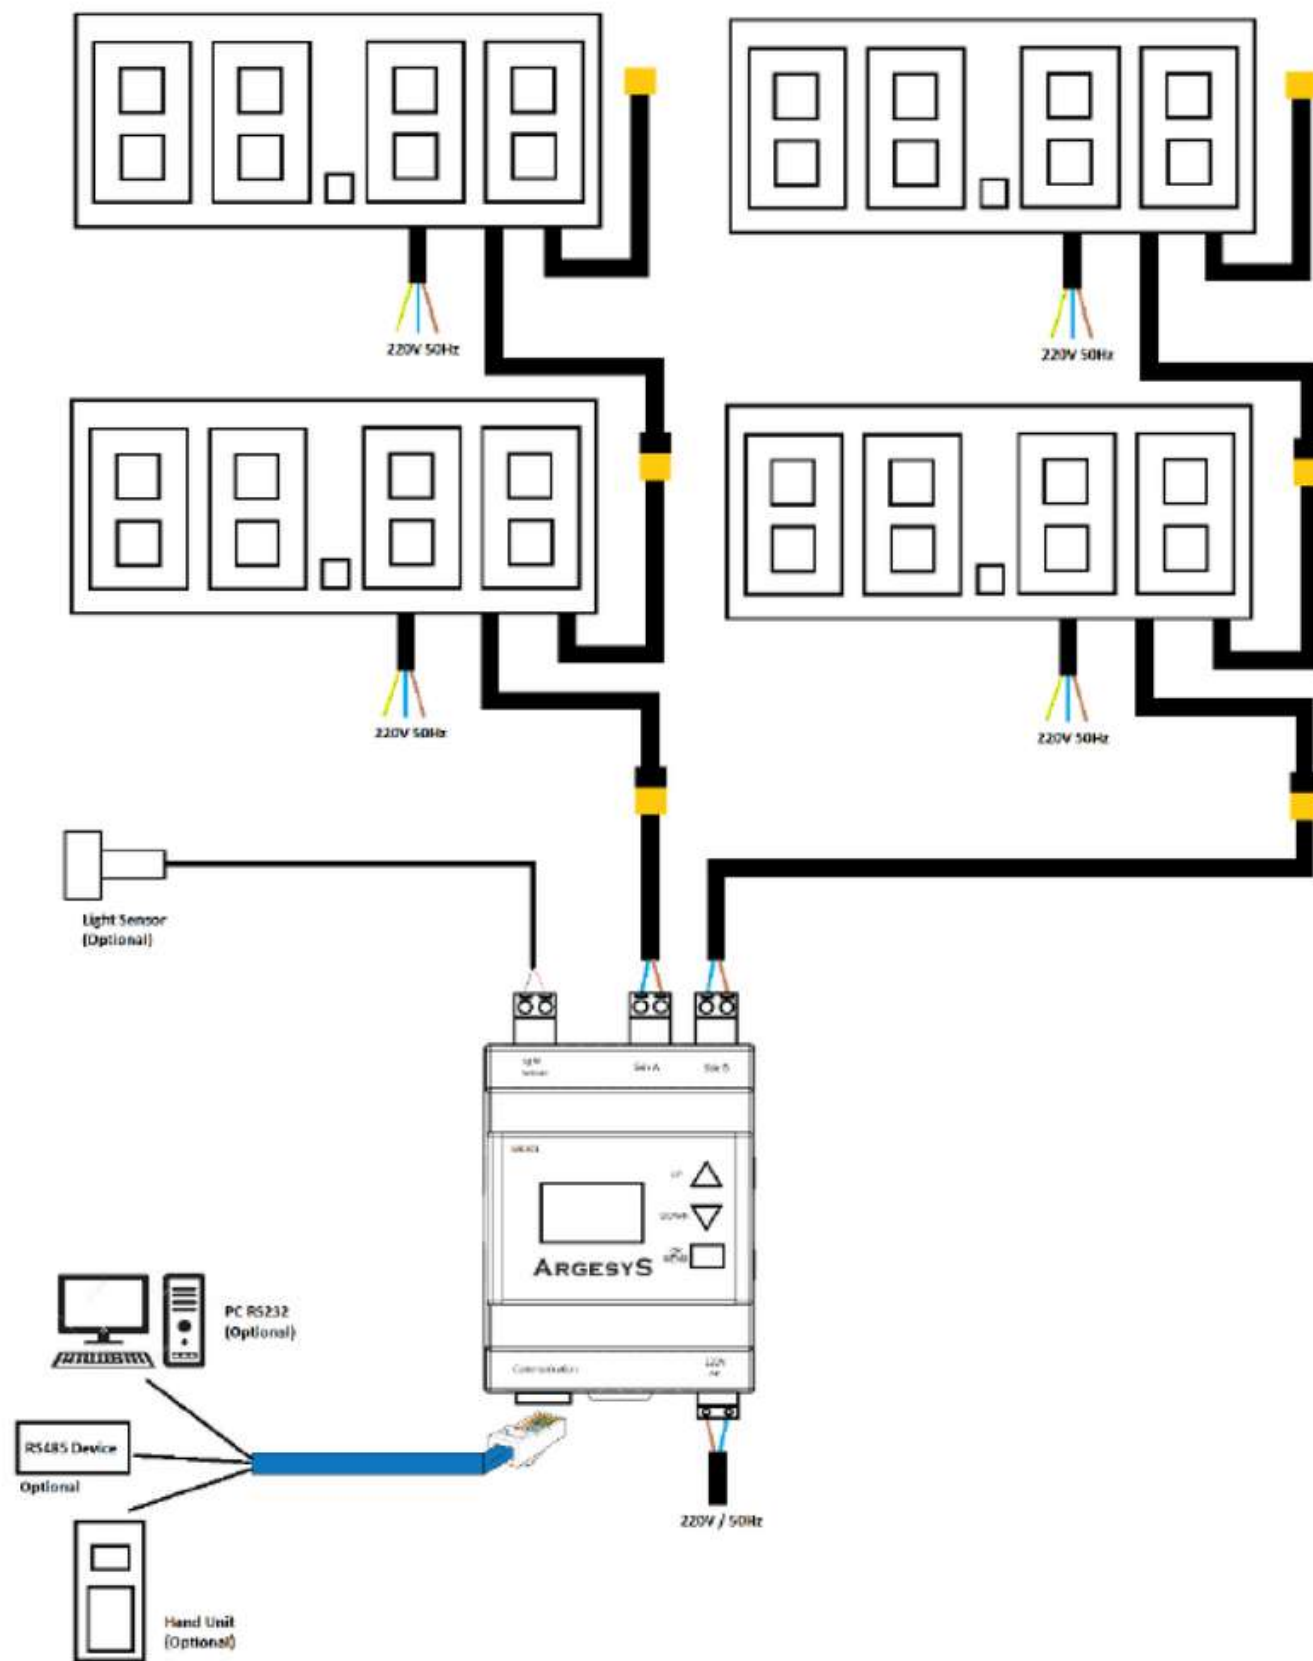

## ALXSYS SIGN V3 GEN-2 MID CONTROL WIFI





# ALSYS LIGHT

ALSYSYS SIGN  
V3 GEN-2 MID CONTROL WIFI



<b>MODEL /SIZE</b>	V3
<b>WORKING VOLTAGE</b>	220 VAC
<b>POWER CONSUMPTION</b>	1W
<b>USER INTERFACE</b>	128x64 Pixel Display
<b>DATA COMMUNICATION</b>	2.4 GHz RF Transceiver, Remote Contoller with Wire, RS485(OPT), RS232(OPT)
<b>PANEL DRIVING CAPACITY</b>	2x8 Panel ( 8 Panel in a Side)

